


SYM	REVISION	BY	DATE
A	REVISED & REDRAWN	BSK	8/11/95

SCALE: 1.5x

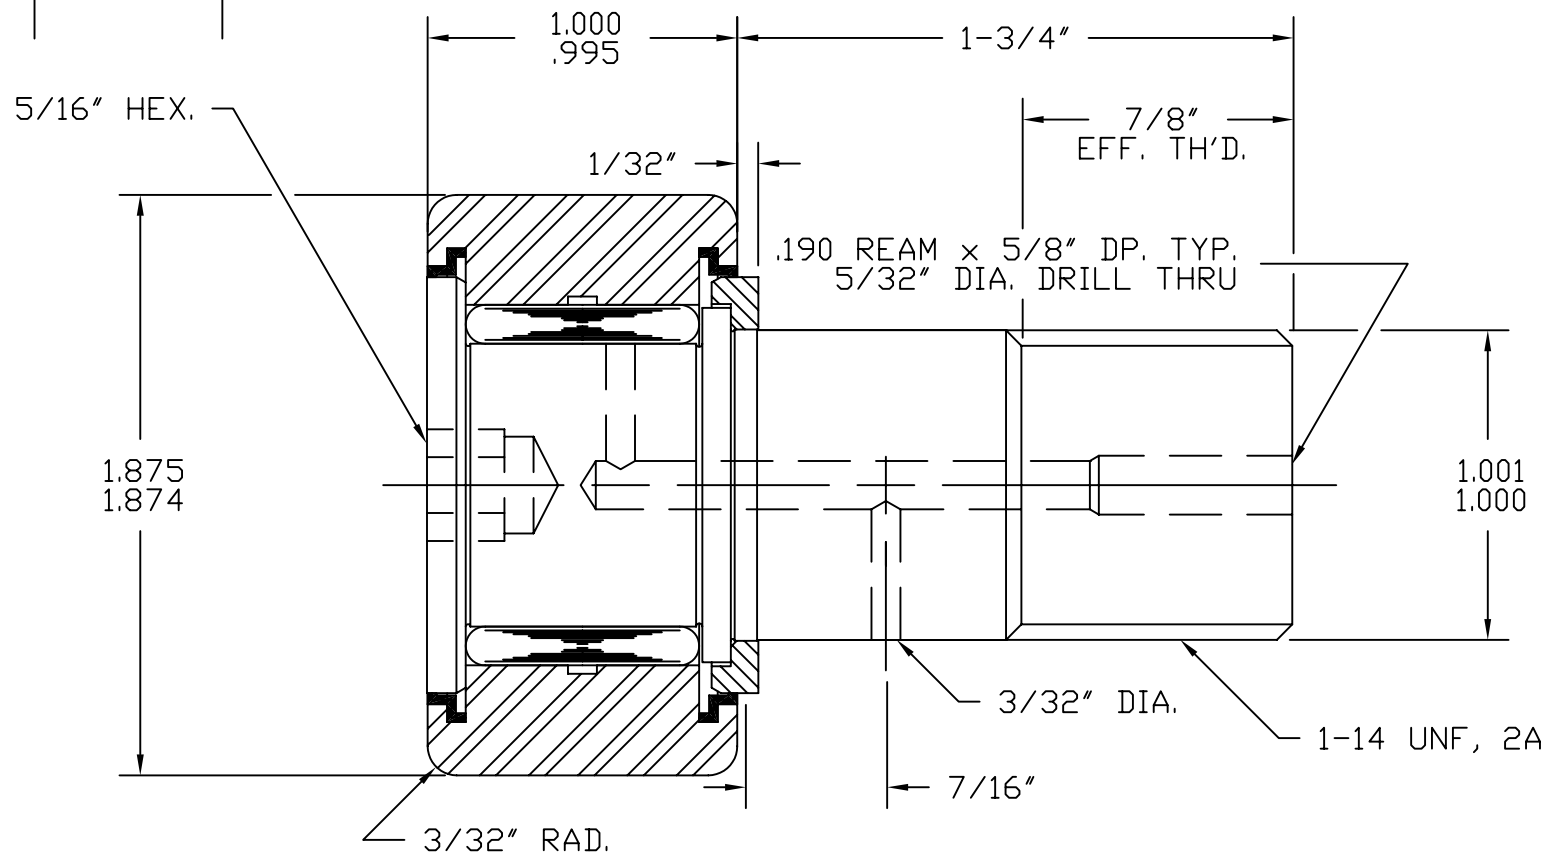

BASIC DYNAMIC CAPACITY - 6070
MAX. ALLOWABLE LOAD - 5400

MAT'L: ST'D BEARING STEELS, SEALS - ACETAL.
BEARING PACKED WITH GENERAL PURPOSE EP GREASE.
RELUBE PROVISIONS WILL ACCEPT 3/16" DRIVE TYPE
FITTINGS, PLUGS SUPPLIED FOR UNUSED HOLES.

TOLERANCES

UNLESS OTHERWISE NOTED
FRACTIONS: $\pm .010$ ANGLES: $\pm .5$
2 PLACE DECIMALS (.00): $\pm .005$
3 PLACE DECIMALS (.000): $\pm .002$

ACCURATE BUSHING CO. INC.
Manufacturers of SMITH® Bearing Product
443 NORTH AVENUE
Garwood, NJ 07027

ABC Inc.

PART NAME	STANDARD CAM FOLLOWER		
PART NO.	HR-1-7/8-XB		
DRAWN BY	BSK	DATE	8/11/95
CHECKED BY		FILENAME	\HRASSYS\1-7-8-XB