


LABEL PLACED ON INSIDE WALL OF CABINET.





LABEL PLACED ON FRONT OF CABINET.

RECOMMENDED CONDUIT  
ENTRANCE AREA - LEFT FRONT SIDE,  
BOTTOM FRONT. RIGHT FRONT SIDE AND  
TOP.

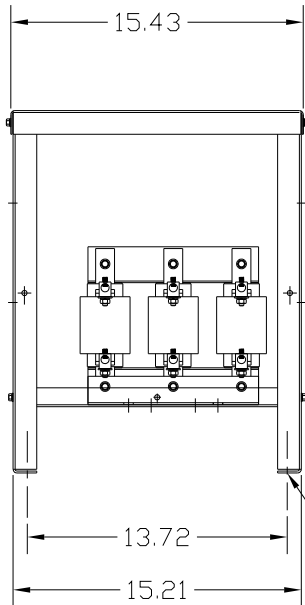

.44 DIA  
MOUNTING HOLES  
4 PLACES.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL LOCAL AND NATIONAL CODES

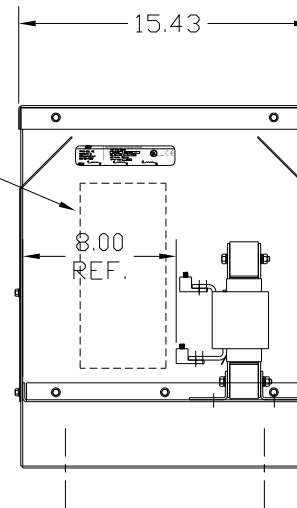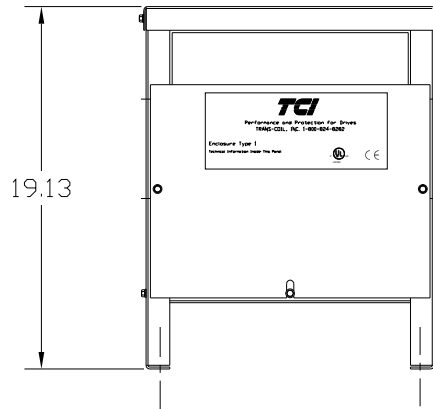

LUG WIRE RANGE 2/0-6, AL OR CU.  
FOR REACTOR.  
TIGHTENING TORQUE. 120 LB-IN

VENDOR LILLY POWDER COATINGS, INC.  
PRODUCT CODE 312E  
COLOR PEBBLE GRAY  
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R  
AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS
KDRULH2HE01	480	75	96	212	82
KDRULH1PE01	480	100	124	NOTE:1	77
KDRULH31PE01	575	125	125	NOTE:1	77
KDRULH43LE01	575/600	125	125	261	82

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY,  
CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.  
KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND  
ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART  
ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT  
CHART USE THE 575 VOLT CURRENT RATING.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .03	
				.XXX ± .01	
				FRACTIONAL	
				± 1/32	
				ANGULAR	
				± 1/2°	
				DRN BY DSW	DATE 06/21/04
				SCALE TO FIT	APPRV. B
				DWG. NO. B KDRULENCL-19DG	
				SHT. 1 OF 1	