

Series 1 Oil-Fog Lubricators

Application:

- Oil-fog lubricators, identified by a green adjusting screw, are used for lubricating a single air tool or air motor and should be installed as close to the device as possible.

Feature:


- All the oil visible dropping through the transparent sight-feed dome goes to the airstream.

F




metal bowl


Features:

- 1 qt. reservoir
- oil level sight gauge
- one turn threaded bowl attachment permits easy maintenance
- inlet pressure: **250 PSI** at ambient temperature (70°F) 

Jumbo

Port Size	Flow (SCFM)	Metal Bowl with Sight Glass	
		Part #	Price/E
3/4"	160	L17-600D	\$363.35
1"	275	L17-800D	363.35
1 1/4"	275	L17-A00D	425.15
1 1/2"	275	L17-B00D	425.20

1 quart US (1 liter) reservoir
1/4 turn drain**Features:**

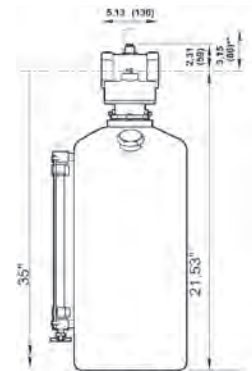
- 2 gallon reservoir
- oil flow can be positively set
- reservoir is ASME construction
- inlet pressure: **250 PSI** at ambient temperature (70°F)
- oil level sight gauge
- cannot be filled under pressure* 

Jumbo General Purpose (Oil-Fog Only)

Port Size	Flow (SCFM)	Metal Bowl with Sight Glass	
		Part #	Price/E
2"	1000	10-076-004	\$5967.90



metal bowl

2 and 5 gallon (8 and 20 liter) reservoir
** Optional pyrex sight-feed dome.
† Minimum clearance required to remove bowl.

See pages 258-259 for lubricator accessories. See page 149 for air tool lubricant.



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings given at 90 PSIG inlet pressure.