

Wilkerson EconOmist® Standard Lubricators

F



transparent bowl with guard

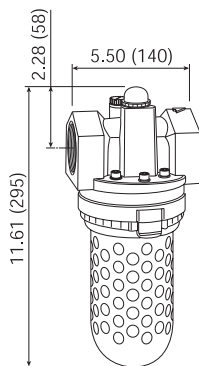


illustration represents L40 series

Features:

- 26 oz. bowl
- transparent bowl: solid bottom
- metal bowl: manual drain with sight glass
- full view sight dome
- adjustable oil feed
- can be filled under pressure
- quick-disconnect clamp ring for easy bowl removal
- The rate of oil delivery may be controlled by turning the adjusting screw counter clockwise for more and clockwise for less oil delivery. The oil delivery rate will change automatically to deliver more oil during higher air flows and less oil for air flows lower than the one at which the setting was made.
- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **200 PSIG** (14 bar) and **32°F to 150°F** (0°C to 65.5°C)


Size	Flow (SCFM)	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1¼"	927	L40-0AA	\$641.90	L40-0AAMB	\$697.90
1½"	927	L40-0BA	641.90	L40-0BAMB	697.90
2"	1186	L50-0CA	870.65	L50-0CAMB	926.60

See pages 232-234 for lubricator accessories. See page 149 for air tool lubricant. SCFM ratings at 120 PSIG inlet pressure.

Wilkerson Compact Combination Units



with metal bowl



Features:

- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **200 PSIG** (13.8 bar) and **32°F to 175°F** (0°C to 80°C)
 - Included components:
 - (2) modular sleeves
 - (2) mounting brackets (sleeve and bracket)
 - (2) end blocks
- Filter series F16:
- 5 micron element
 - 5 oz. bowl
- Lubricator series L16:
- 5 oz. bowl
 - adjustable oil feed
 - full view sight dome
- Regulator series R16:
- 0-125 PSI adjusting range
 - self-relieving
 - supplied with a GC230 gauge

Size	Flow (SCFM)	With Transparent Bowl and Guard				Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
¼"	36.1	C16-02A	\$622.20	C16-02M	\$565.40	C16-02AMB	\$656.25	C16-02MMB	\$599.50
⅜"	58.5	C16-03A	622.20	C16-03M	565.40	C16-03AMB	656.25	C16-03MMB	599.50
½"	64.0	C16-04A	622.20	C16-04M	565.40	C16-04AMB	656.25	C16-04MMB	599.50

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.