

Watts Lubricators

General Features:

- general purpose use
- high performance over a very wide flow range
- ¼", 1" and 1½" are fillable while under pressure

F




Features:

- 2.6 oz. bowl
- zinc body
- micromist
- maximum operating conditions:
 - temperature range: **40°F** (4.4°C) to **125°F** (52°C)
 - maximum operating pressure: **150 PSIG** (10.2 bar)

Compact

Size	Flow (SCFM)	Polycarbonate Bowl with Plastic Bowl Guard	
		Part #	Price/E
¼"	40	L606-02B	\$145.50
¾"	60	L606-03B	145.50
½"	90	L606-04B	142.70

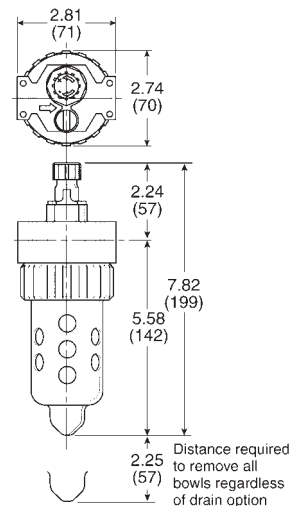


Features:

- 16 oz. bowl
- zinc body
- maximum operating conditions:
 - temperature range: **40°F** (4.4°C) to **150°F** (65.6°C)
 - maximum operating pressure: **250 PSIG** (17 bar)

Standard

Size	Flow (SCFM)	Zinc Bowl with Sight Glass	
		Part #	Price/E
¾"	275	L606-06W	\$322.15
1"	320	L606-08W	322.15

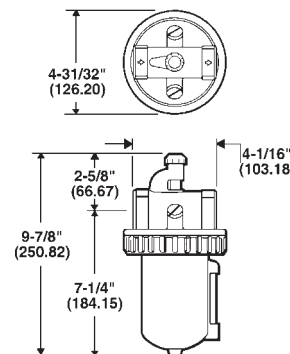


Features:

- 16 oz. bowl
- zinc body
- maximum operating conditions:
 - temperature range: **40°F** (4.4°C) to **150°F** (65.6°C)
 - maximum operating pressure: **250 PSIG** (17 bar)

Standard

Size	Flow (SCFM)	Zinc Bowl with Sight Glass	
		Part #	Price/E
1½"	550	L606-12W	\$383.65

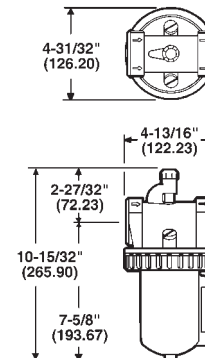

See page 267 for lubricator accessories. See page 149 for air tool lubricant.

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings given at 150 PSIG inlet pressure.