

PB22400, PEB22400







Photo Shows a 2-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

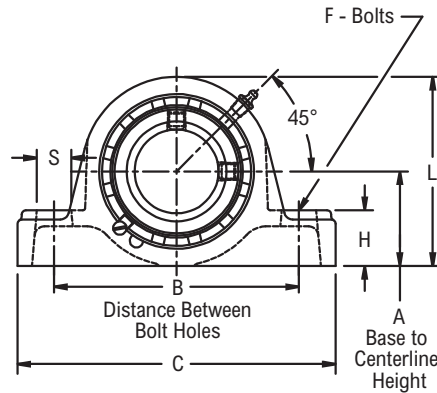

Fixed



Expansion

Bearing Dimensions

Size Code	Shaft Diameter	Expansion			Fixed			A Base to Centerline Height	B Distance Between Bolt Holes	C	D	E	F	H	M	P	U	W	Approx. Weight
		Part Number	L	S	Part Number	L	S												
B416	1	PEB22416H	3 5/16	5/8	PB22416H	3 1/8	5/8	1 9/16	4 3/8	5 15/16	2 9/16	2 1/16	3/8	7/8	1 3/4	17/32	1 9/16	1 29/32	5.00
	25.00	PEB224M25H	84.10	15.90	PB224M25H	79.40	15.90	39.67	111.10	150.80	65.09	52.40	10.00	22.20	44.40	13.50	39.70	48.40	2.10
B420	1 3/16	PEB22419H	3 5/8	5/8	PB22419H	3 1/2	5/8	1 3/4	4 3/4	6 5/16	2 11/16	2 3/16	3/8	1 1/16	1 31/32	17/32	1 5/8	1 31/32	6.00
	1 1/4	PEB22420H			PB22420H														
B424	1 7/16	PEB22423H	3 7/8	7/8	PB22423H	3 11/16	13/16	1 7/8	5	6 9/16	2 7/8	2 1/4	1/2	1 3/16	2 5/16	21/32	1 25/32	2 3/16	7.00
	1 1/2	PEB22424H			PB22424H														
B428	1 5/8	PEB22426H	4 3/8	7/8	PB22426H	4 1/4	13/16	2 1/8	5 1/2	7 1/8	3 1/8	2 1/2	1/2	1 5/16	2 19/32	21/32	1 29/32	2 1/4	10.00
	1 11/16	PEB22427H			PB22427H														
B432	1 3/4	PEB22428H			PB22428H														
	40.00	PEB224M40H	111.10	22.22	PB224M40H	108.00	20.60	53.98	139.70	180.98	79.38	63.50	12.00	33.30	65.90	16.70	48.40	57.20	4.70
B436	1 15/16	PEB22431H	4 9/16	15/16	PB22431H	4 9/16	15/16	2 1/4	6 1/4	8 1/8	3 1/8	2 1/2	5/8	1 3/8	2 7/8	21/32	1 29/32	2 9/32	12.00
	2	PEB22432H			PB22432H														
B440	2 1/16	PEB22435H	5	15/16	PB22435H	5	15/16	2 1/2	6 3/4	8 5/8	3 5/16	2 9/16	5/8	1 5/8	3 1/4	25/32	2 1/16	2 7/16	14.00
	2 1/4	PEB22436H			PB22436H														
B444	2 7/16	PEB22439H	5 1/2	15/16	PB22439H	5 1/2	15/16	2 3/4	7 1/8	9 1/8	3 1/2	2 11/16	5/8	1 5/8	3 9/16	27/32	2 3/16	2 9/16	17.00
	2 1/2	PEB22440H			PB22440H														
B448	2 3/16	PEB22443H	6 7/16	1 1/16	PB22443H	6 7/16	1 1/16	3 1/4	8 1/8	10 7/16	4	3 3/16	3/4	2	4 1/16	27/32	2 7/16	2 25/32	29.00
	2 3/4	PEB22444H			PB22444H														
B452	2 15/16	PEB22447H			PB22447H														
	3	PEB22448H			PB22448H														
B456	65.00	PEB224M65H	163.50	27.00	PB224M65H	163.50	27.00	82.55	206.40	265.10	101.60	81.00	20.00	57.20	103.20	21.40	61.90	70.60	13.20
	70.00	PEB224M70H			PB224M70H														
B460	75.00	PEB224M75H			PB224M75H														
B464	3 3/16	PEB22451H	7 1/2	1 5/8	PB22451H	7 1/2	1 5/8	3 3/4	10	13	4 3/8	3 7/16	7/8	2 1/4	4 29/32	15/16	2 21/32	3	43.00
	3 7/16	PEB22455H			PB22455H														
B468	3 1/2	PEB22456H			PB22456H														
	80.00	PEB224M80H	190.50	41.30	PB224M80H	190.50	41.30	95.25	254.00	330.20	111.12	87.30	24.00	57.20	124.60	23.80	67.50	76.20	19.60
B472	85.00	PEB224M85H			PB224M85H														

Continued...

Continued...

Bearing Dimensions

Size Code	Shaft Diameter	Expansion			Fixed			A Base to Centerline Height	B Distance Between Bolt Holes	C	D	E	F	H	M	P	U	W	Approx. Weight
		Part Number	L	S	Part Number	L	S												
B464	3 ¹¹ / ₁₆	PEB22459H	8 ¹ / ₂	2 ¹ / ₄	PB22459H	8 ¹ / ₂	2 ¹ / ₄	4 ¹ / ₄	11 ³ / ₄	15 ¹ / ₄	5 ¹ / ₁₆	4 ³ / ₁₆	1	2 ⁵ / ₈	5 ⁵ / ₈	1 ¹ / ₁₆	3 ¹ / ₁₆	3 ⁷ / ₁₆	61.00
	3 ¹⁵ / ₁₆	PEB22463H			PB22463H														59.00
	4	PEB22464H			PB22464H														
	90.00	PEB224M90H	215.90	57.20	PB224M90H	215.90	57.20	107.95	298.40	387.40	128.59	106.40	24.00	66.70	142.90	27.00	77.80	87.30	28.70
	100.00	PEB224M100H			PB224M100H														26.90
B464L	3 ¹⁵ / ₁₆	-	-	-	PLB22463H	8 ³ / ₈	1 ⁷ / ₈	4 ¹ / ₈	10 ⁷ / ₈	14 ¹ / ₄	5 ¹ / ₁₆	4 ³ / ₁₆	1	2 ¹ / ₂	5 ⁵ / ₈	1 ¹ / ₁₆	3 ¹ / ₁₆	3 ⁷ / ₁₆	58.00
	4	-	-	-	PLB22464H														

Additional Notes

Please call 1-866-REXNORD for availability

Lubrication fitting tap size, 1/8" PT

Base to centerline tolerance, +/- .005" (+/-0.13mm)

Expansion - is 3/8" for all size codes

H labyrinth seals standard

All size codes available with type E lip seals, except E7 in size code B416

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


PB22400F, PEB22400F



Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

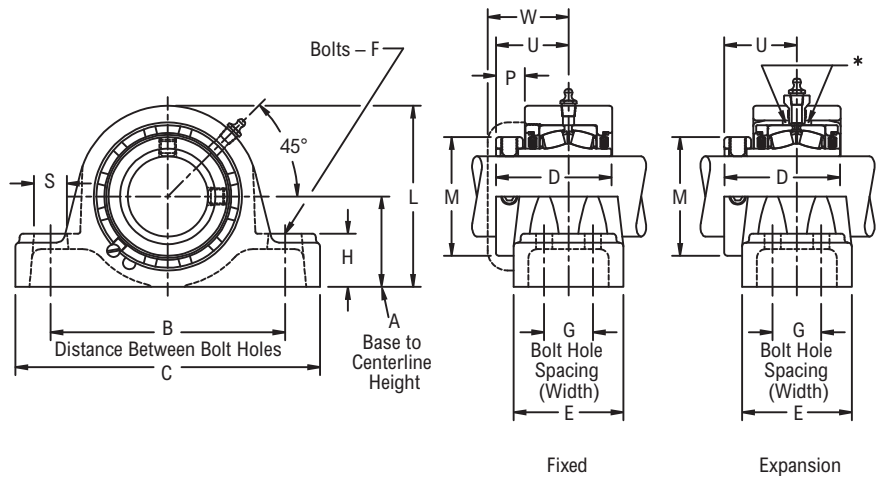

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		A Base to Centerline Height	B Distance Between Bolt Holes	G Bolt Hole Spacing (Width)	C	D	E	F	H	L	M	P	S	U	W	Approx. Weight
		Part Number	Part Number															
B432	1 15/16	PEB22431FH	PB22431FH	2 1/4	6 1/4	1 19/32	8 3/8	3 1/8	3 3/16	1/2	1 3/8	4 9/16	2 7/8	2 1/32	13/16	1 29/32	2 9/32	13.00
	2	PEB22432FH	PB22432FH															
	45.00	PEB224M45FH	PB224M45FH															6.30
	50.00	PEB224M50FH	PB224M50FH															5.90
B436	2 3/16	PEB22435FH	PB22435FH	2 1/2	6 3/4	1 11/16	8 7/8	3 5/16	3 1/4	1/2	1 5/8	5	3 1/4	25/32	13/16	2 1/16	2 7/16	15.00
	2 1/4	PEB22436FH	PB22436FH															
	55.00	PEB224M55FH	PB224M55FH															6.90
	60.00	PEB224M60FH	PB224M60FH															8.60
B440	2 7/16	PEB22439FH	PB22439FH	2 3/4	7 1/8	1 3/4	9 1/4	3 1/2	3 3/8	1/2	1 3/4	5 1/2	3 9/16	27/32	13/16	2 3/16	2 9/16	19.00
	2 1/2	PEB22440FH	PB22440FH															
	60.00	PEB224M60FH	PB224M60FH															8.60
	65.00	PEB224M65FH	PB224M65FH															13.70
B448	2 11/16	PEB22443FH	PB22443FH	3 1/4	8 1/8	1 7/8	10 7/16	4	3 3/4	5/8	2 1/4	6 7/16	4 1/16	27/32	15/16	2 7/16	2 25/32	30.00
	2 3/4	PEB22444FH	PB22444FH															
	2 15/16	PEB22447FH	PB22447FH															29.00
	3	PEB22448FH	PB22448FH															28.00
	65.00	PEB224M65FH	PB224M65FH															13.70
	70.00	PEB224M70FH	PB224M70FH															13.50
B456	3 3/16	PEB22451FH	PB22451FH	3 3/4	10	2	13	4 3/8	4 1/8	3/4	2 1/4	7 1/2	4 29/32	15/16	1 1/2	2 21/32	3	45.00
	3 7/16	PEB22455FH	PB22455FH															
	3 1/2	PEB22456FH	PB22456FH															43.00
	80.00	PEB224M80FH	PB224M80FH															20.50
	85.00	PEB224M85FH	PB224M85FH															20.00
	90.00	PEB224M90FH	PB224M90FH															69.00
B464	3 11/16	PEB22459FH	PB22459FH	4 1/4	12 1/2	2 1/4	15 1/4	5 1/16	4 1/2	3/4	2 5/8	8 1/2	5 5/8	1 1/16	1 1/4	3 1/16	3 7/16	67.00
	3 15/16	PEB22463FH	PB22463FH															
	4	PEB22464FH	PB22464FH															66.00
	90.00	PEB224M90FH	PB224M90FH															32.10
	100.00	PEB224M100FH	PB224M100FH															30.30
	100.00	PEB224M100FH	PB224M100FH															30.30

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/-0.005" (+/-0.13mm)
- Expansion - is 3/8" for all size codes
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


PB22500, PEB22500, PB22500F, PEB22500F



Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Two hardened spring locking collars
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

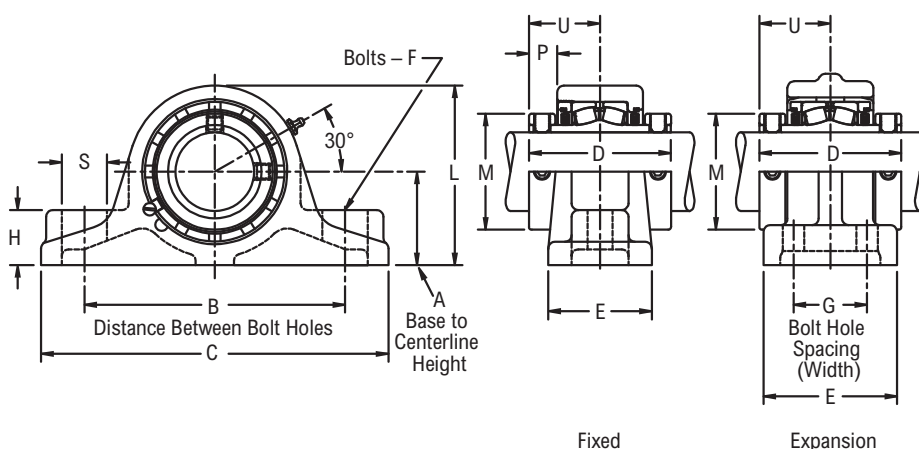

Fixed

Expansion

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		A Base to Centerline Height	B Distance Between Bolt Holes	G Bolt Hole Spacing (Width)	C	D	E	F	H	M	P	S	U	Approx. Weight
		Part Number	L	Part Number	L													
Two-Bolt Pillow Block																		
B524	1 7/16	PEB22523H	4 11/32	PB22523H	3 31/32	2 1/8	5 7/8	-	8 1/8	3 9/16	2 7/16	1/2	1 1/8	2 5/16	11/16	1 1/8	1 25/32	10.00
B528	1 11/16	PEB22527H	4 13/16	PB22527H	4 7/16	2 5/16	6 1/2	-	9	3 13/16	2 13/16	1/2	1 5/16	2 19/32	23/32	1 1/4	1 29/32	12.00
B531	1 15/16	PEB22531H	4 15/16	PB22531H	4 3/4	2 1/2	7	-	9 3/4	3 13/16	2 7/8	5/8	1 7/16	2 7/8	23/32	1 1/4	1 29/32	14.00
B536	2	PEB22532H	5 23/32	PB22532H	5 1/4	2 3/4	7 1/2	-	10 1/4	4 1/8	3 1/8	5/8	1 5/8	3 1/4	25/32	1 1/4	2 1/16	21.00
	2 3/16	PEB22535H		PB22535H														20.00
B540	2 7/16	PEB22539H	6 3/16	PB22539H	5 3/4	3	8 1/4	-	11 1/4	4 3/8	3 3/8	3/4	1 3/4	3 9/16	13/16	1 3/8	2 3/16	24.00
B548	2 11/16	PEB22543H	7 3/16	PB22543H	6 23/32	3 1/2	9 3/4	-	13	4 7/8	3 7/8	7/8	2 1/16	4 1/16	29/32	1 5/8	2 7/16	39.00
	2 15/16	PEB22547H		PB22547H														37.00
Four-Bolt Pillow Block																		
B531	1 15/16	PEB22531FH	4 7/8	PB22531FH	4 7/8	2 1/2	7	2 1/4	9	3 13/16	3 13/16	1/2	1 11/16	2 7/8	23/32	7/8	1 29/32	16.00
B536	2	PEB22532FH	5 15/32	PB22532FH	5 15/32	2 3/4	7 1/2	2 1/4	9 15/16	4 1/8	4	1/2	2	3 1/4	25/32	1 1/8	2 1/16	22.00
	2 3/16	PEB22535FH		PB22535FH														22.00
B540	2 7/16	PEB22539FH	5 7/8	PB22539FH	5 7/8	3	8 5/8	2 5/8	10 5/8	4 3/8	4 3/8	1/2	2 1/8	3 9/16	13/16	1 1/8	2 3/16	26.00
B548	2 11/16	PEB22543FH	6 15/16	PB22543FH	6 15/16	3 1/2	9 3/4	2 3/4	12 5/8	4 7/8	4 3/4	5/8	2 5/16	4 1/16	29/32	1 1/2	2 7/16	38.00
	2 15/16	PEB22547FH		PB22547FH														36.00
B556	3 7/16	PEB22555FH	8	PB22555FH	8	4	11 1/2	3	14 1/4	5 5/16	5	3/4	2 1/2	4 29/32	15/16	1 1/2	2 21/32	56.00
B564	3 15/16	PEB22563FH	8 13/16	PB22563FH	8 13/16	4 7/16	12 1/4	3 3/8	15 5/8	6 1/8	5 5/8	7/8	2 7/8	5 5/8	1 1/16	1 13/16	3 1/16	76.00
	4	PEB22564FH		PB22564FH														76.00
B572	4 3/16	PEB22567YFH	9 3/8	PB22567YFH	9 3/8	4 3/4	13 1/2	2 1/2	16 1/2	6 1/4	4 5/8	3/4	2 3/4	6 3/16	1	1 3/8	3 1/8	92.00
	4 7/16	PEB22571YFH		PB22571YFH														88.00
	4 1/2	PEB22572YFH		PB22572YFH														87.00
	110.00	PEB225M110YFH		PB225M110YFH														40.70
	115.00	PEB225M115YFH	238.10	PB225M115YFH	238.10	120.65	342.90	63.50	419.10	158.75	117.48	20.00	69.80	157.16	25.40	34.90	79.37	39.50
B580	4 15/16	PEB22579YFH	11 1/8	PB22579YFH	11 1/8	5 1/2	15 1/2	2 3/4	18 1/2	7 7/8	5 9/16	7/8	3	7 1/16	1 5/32	1 1/2	3 15/16	129.00
	5	PEB22580YFH		PB22580YFH														128.00
		125.00	PEB225M125YFH	282.57	PB225M125YFH	282.57	139.70	393.70	69.80	469.90	200.02	141.34	24.00	76.20	179.38	29.37	38.10	100.01

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/- 0.13mm)
- Expansion - is 3/8" for all size codes
- H labyrinth seals standard

All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



PB22600, PEB22600




Photo Shows a 2-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

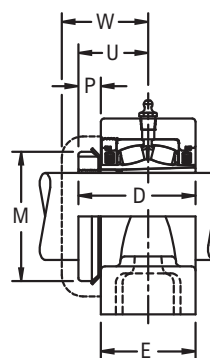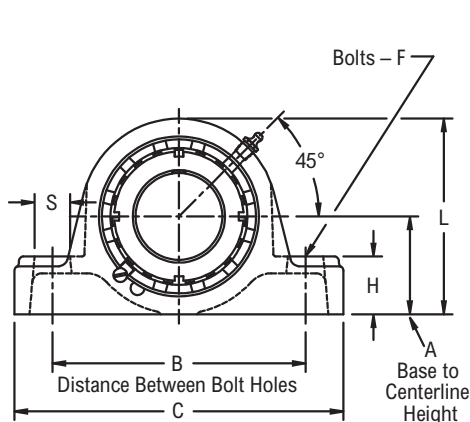

Fixed



Expansion

Bearing Dimensions

Size Code	Shaft Diameter	Expansion			Fixed			A Base to Centerline Height	B Distance Between Bolt Holes	C	D	E	F	H	M	P	U	W	Approx. Weight
		Part Number	L	S	Part Number	L	S												
B624	1 7/16	PEB22623H	3 7/8	7/8	PB22623H	3 11/16	13/16	1 7/8	5	6 9/16	2.71	2 1/4	1/2	1 3/16	2 1/4	1/2	1 39/64	2 3/16	7.00
B631	1 15/16	PEB22631H	4 9/16	15/16	PB22631H	4 9/16	15/16	2 1/4	6 1/4	8 1/8	3.08	2 1/2	5/8	1 3/8	2 31/32	39/64	1 55/64	2 9/32	12.00
B635	2 3/16	PEB22635H	5	15/16	PB22635H	5	15/16	2 1/2	6 3/4	8 5/8	3.16	2 9/16	5/8	1 5/8	3 5/32	5/8	1 29/32	2 7/16	14.00
B639	2 7/16	PEB22639H	5 1/2	15/16	PB22639H	5 1/2	15/16	2 3/4	7 1/8	9 1/8	3.28	2 11/16	5/8	1 5/8	3 5/8	45/64	1 31/32	2 9/16	17.00
B647	2 11/16	PEB22643H	6 7/16	1 1/16	PB22643H	6 7/16	1 1/16	3 1/4	8 1/8	10 7/16	3.86	3 3/16	3/4	2	4 5/32	3/4	2 19/64	2 25/32	29.00
	2 15/16	PEB22647H	6 7/16	1 1/16	PB22647H	6 7/16	1 1/16	3 1/4	8 1/8	10 7/16	3.86	3 3/16	3/4	2	4 5/32	3/4	2 19/64	2 25/32	27.00
B655	3 7/16	PEB22655H	7 1/2	1 5/8	PB22655H	7 1/2	1 5/8	3 3/4	10	13	4.29	3 7/16	7/8	2 1/4	4 15/16	7/8	2 37/64	3	42.00
B663	3 15/16	PEB22663H	8 1/2	2 1/4	PB22663H	8 1/2	2 1/4	4 1/4	11 3/4	15 1/4	4.94	4 3/16	1	2 5/8	5 7/16	15/16	2 15/16	3 7/16	59.00

Additional Notes

Please call 1-866-REXNORD for availability
 Lubrication fitting tap size, 1/8" PT
 Base to centerline tolerance, +/- .005" (+/- 0.13mm)
 Expansion - is 3/8" for all size codes
 Dimensions for "D", "P" & "U" based on unmounted condition
 H labyrinth seals standard
 All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
 Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


PB22600F, PEB22600F



Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

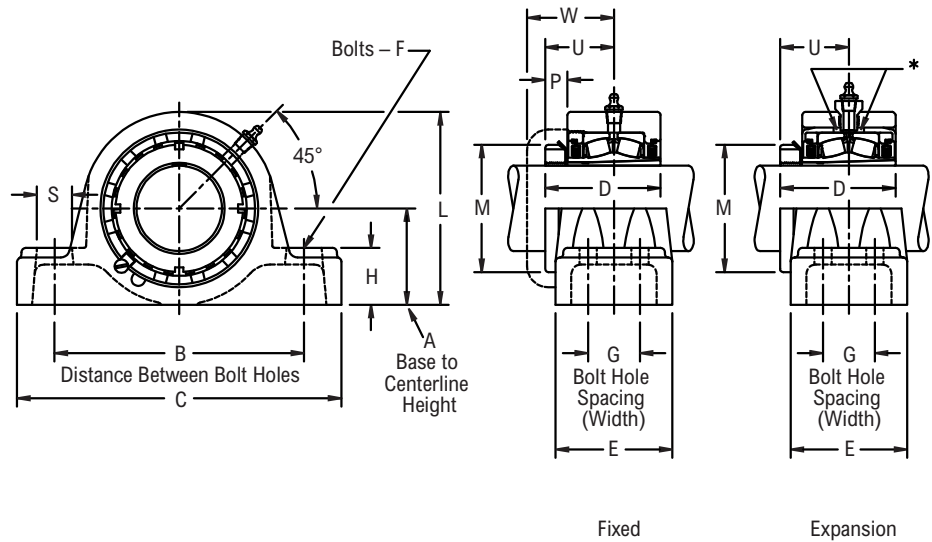

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		A Base to Centerline Height	B Distance Between Bolt Holes	G Bolt Hole Spacing (Width)	C	D	E	F	H	M	P	S	U	W	Approx. Weight
		Part Number	L	Part Number	L														
B631	1 15/16	PEB22631FH	4 9/16	PB22631FH	4 9/16	2 1/4	6 1/4	1 19/32	8 3/8	3.08	3 3/16	1/2	1 3/8	2 31/32	39/64	13/16	1 55/64	2 9/32	13.00
B635	2 3/16	PEB22635FH	5	PB22635FH	5	2 1/2	6 3/4	1 11/16	8 7/8	3.16	3 1/4	1/2	1 5/8	3 5/32	5/8	13/16	1 29/32	2 7/16	15.00
B639	2 7/16	PEB22639FH	5 1/2	PB22639FH	5 1/2	2 3/4	7 1/8	1 3/4	9 1/4	3.28	3 3/8	1/2	1 3/4	3 5/8	5/8	13/16	1 31/32	2 9/16	19.00
B647	2 11/16	PEB22643FH	6 7/16	PB22643FH	6 7/16	3 1/4	8 1/8	1 7/8	10 7/16	3.86	3 3/4	5/8	2 1/4	4 5/32	45/64	15/16	2 19/64	2 25/32	30.00
	2 15/16	PEB22647FH		PB22647FH															
B655	3 7/16	PEB22655FH	7 1/2	PB22655FH	7 1/2	3 3/4	10	2	13	4.29	4 1/8	3/4	2 1/4	4 15/16	55/64	1 1/2	2 37/64	3	43.00
B663	3 15/16	PEB22663FH	8 1/2	PB22663FH	8 1/2	4 1/4	12 1/2	2 1/4	15 1/4	4.94	4 1/2	3/4	2 5/8	5 7/16	15/16	1 1/4	2 15/16	3 7/16	67.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/- 0.13mm)
- Expansion - is 3/8" for all size codes
- Dimensions for "D", "P" & "U" based on unmounted condition
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.

PKB22400, PKEB22400



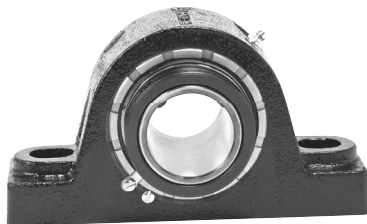


Photo Shows a 2-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

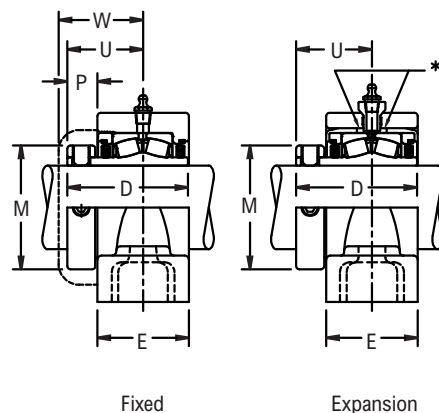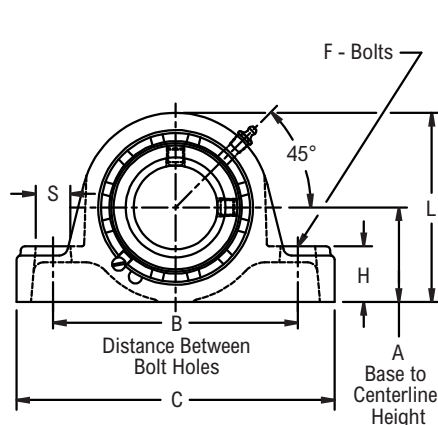

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		A Base to Centerline Height	B Distance Between Bolt Holes	C	D	E	F	H	M	P	S	U	W	Approx. Weight
		Part Number	L	Part Number	L													
B420	1 3/16	-	-	PKB22419H	3 1/2	1 3/4	4 3/4	6 5/16	2 11/16	2 3/16	3/8	1 1/16	1 31/32	17/32	5/8	1 5/8	1 31/32	7.00
	1 1/4	-	-	PKB22420H														
	30.00	-	-	PKB224M30H	88.90	44.45	120.60	160.30	68.26	55.60	10.00	27.00	50.00	13.50	15.90	41.30	50.00	3.20
B424	1 7/16	PKEB22423H	3 7/8	PKB22423H	3 11/16	1 7/8	5	6 7/8	2 7/8	2 1/4	1/2	1 3/16	2 5/16	21/32	13/16	1 25/32	2 3/16	7.00
	1 1/2	PKEB22424H		PKB22424H														
	35.00	PKEB224M35H	98.40	PKB224M35H	93.70	47.62	127.00	174.60	73.02	57.20	12.00	30.20	58.70	16.70	20.60	45.20	55.60	3.40
B428	1 5/8	PKEB22426H	4 3/8	PKB22426H	4 1/4	2 1/8	5 1/2	7 3/8	3 1/8	2 1/2	1/2	1 5/16	2 19/32	21/32	13/16	1 29/32	2 1/4	10.00
	1 11/16	PKEB22427H		PKB22427H														
	1 3/4	PKEB22428H		PKB22428H														
	40.00	PKEB224M40H	111.10	PKB224M40H	108.00	53.98	139.70	187.30	79.38	63.50	12.00	33.30	65.90	16.70	20.60	48.40	57.20	4.80
B432	1 15/16	PKEB22431H	4 9/16	PKB22431H	4 9/16	2 1/4	6 1/4	8 3/8	3 1/8	2 1/2	5/8	1 3/8	2 7/8	21/32	15/16	1 29/32	2 9/32	12.00
	2	PKEB22432H		PKB22432H														
	45.00	PKEB224M45H	115.90	PKB224M45H	115.90	57.15	158.80	212.70	79.38	63.50	16.00	34.90	73.00	16.70	23.80	48.40	57.90	5.80
	50.00	PKEB224M50H		PKB224M50H														5.50
B436	2 3/16	PKEB22435H	5	PKB22435H	5	2 1/2	6 3/4	8 7/8	3 5/16	2 9/16	5/8	1 5/8	3 1/4	25/32	15/16	2 1/16	2 7/16	16.00
	2 1/4	PKEB22436H		PKB22436H														
	55.00	PKEB224M55H	127.00	PKB224M55H	127.00	63.50	171.40	225.40	84.14	65.10	16.00	41.30	82.60	19.80	23.80	52.40	61.90	7.10
B440	2 7/16	PKEB22439H	5 1/2	PKB22439H	5 1/2	2 3/4	7 1/8	9 1/4	3 1/2	2 11/16	5/8	1 3/4	3 9/16	27/32	15/16	2 3/16	2 9/16	19.00
	2 1/2	PKEB22440H		PKB22440H													18.00	
	60.00	PKEB224M60H	139.70	PKB224M60H	139.70	69.85	181.00	235.00	88.90	68.30	16.00	44.40	90.50	21.40	23.80	55.60	65.10	8.60
B448	2 11/16	PKEB22443H	6 7/16	PKB22443H	6 7/16	3 1/4	8 1/8	10 7/16	4	3 3/16	3/4	2 1/4	4 1/16	27/32	1 1/16	2 7/16	2 25/32	30.00
	2 3/4	PKEB22444H		PKB22444H													29.00	
	2 15/16	PKEB22447H		PKB22447H													28.00	
	3	PKEB22448H		PKB22448H													13.70	
	65.00	PKEB224M65H		PKB224M65H														13.50
	70.00	PKEB224M70H	163.50	PKB224M70H	163.50	82.55	206.40	265.10	101.60	81.00	20.00	57.20	103.20	21.40	27.00	61.90	70.60	13.50
	75.00	PKEB224M75H		PKB224M75H														13.00
B456	3 3/16	PKEB22451H	7 1/2	PKB22451H	7 1/2	3 3/4	10	13	4 3/8	3 7/16	7/8	2 1/4	4 29/32	15/16	1 5/8	2 21/32	3	45.00
	3 7/16	PKEB22455H		PKB22455H														
	3 1/2	PKEB22456H		PKB22456H														
	80.00	PKEB224M80H	190.50	PKB224M80H	190.50	95.25	254.00	330.20	111.12	87.30	24.00	57.20	124.60	23.80	41.30	67.50	76.20	20.20
	85.00	PKEB224M85H		PKB224M85H														19.70
B464	3 11/16	PKEB22459H	8 1/2	PKB22459H	8 1/2	4 1/4	11 3/4	15 1/4	5 1/16	4 3/16	1	2 5/8	5 5/8	1 1/16	2 1/4	3 1/16	3 7/16	64.00
	3 15/16	PKEB22463H		PKB22463H														62.00

Continued...

Continued...

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		A Base to Centerline Height	B Distance Between Bolt Holes	C	D	E	F	H	M	P	S	U	W	Approx. Weight
		Part Number	L	Part Number	L													
B464	4	PKEB22464H	8 1/2	PKB22464H	8 1/2	4 1/4	11 3/4	15 1/4	5 1/16	4 9/16	1	2 5/8	5 5/8	1 1/16	2 1/4	3 1/16	3 7/16	62.00
	90.00	PKEB224M90H	215.90	PKB224M90H	215.90	107.95	298.40	387.40	128.59	106.4	24.00	66.70	142.90	27.00	57.20	77.80	87.30	29.90
	100.00	PKEB224M100H		PKB224M100H														28.10

Additional Notes

Please call 1-866-REXNORD for availability
 Lubrication fitting tap size, 1/8" PT
 Base to centerline tolerance, +/- .005" (+/-0.13mm)
 Expansion - is 3/8" for all size codes
 H labyrinth seals standard
 All size codes available with type E lip seals & E7 triple lip seals
 For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


PKB22400F, PKEB22400F



Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

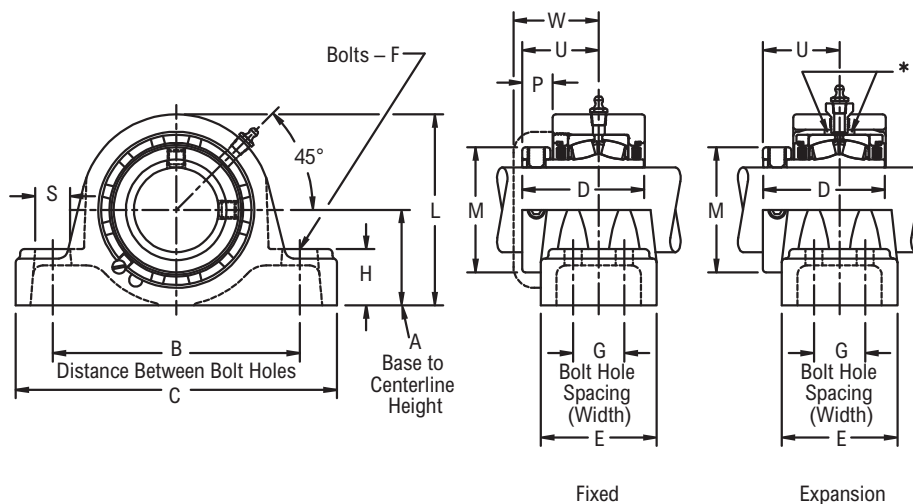

Bearing Dimensions

Size Code	Shaft Diameter	Expansion	Fixed	A Base to Centerline Height	B Distance Between Bolt Holes	G Bolt Hole Spacing (Width)	C	D	E	F	H	L	M	P	S	U	W	Approx. Weight
		Part Number	Part Number															
B432	1 15/16	PKEB22431FH	PKB22431FH	2 1/4	6 1/4	1 19/32	8 3/8	3 1/8	3 3/16	1/2	1 3/8	4 9/16	2 7/8	2 1/32	13/16	1 29/32	2 9/32	13.00
	2	PKEB22432FH	PKB22432FH															
	45.00	PKEB224M45FH	PKB224M45FH	57.15	158.80	40.50	212.70	79.38	81.00	12.00	34.90	115.90	73.00	16.70	20.60	48.40	57.90	6.10
	50.00	PKEB224M50FH	PKB224M50FH															5.80
B436	2 3/16	PKEB22435FH	PKB22435FH	2 1/2	6 3/4	1 11/16	8 7/8	3 5/16	3 1/4	1/2	1 5/8	5	3 1/4	25/32	13/16	2 1/16	2 7/16	16.00
	2 1/4	PKEB22436FH	PKB22436FH															
	55.00	PKEB224M55FH	PKB224M55FH	63.50	171.40	42.90	225.40	84.14	82.60	12.00	41.30	127.00	82.60	19.80	20.60	52.40	61.90	7.30
B440	2 7/16	PKEB22439FH	PKB22439FH	2 3/4	7 1/8	1 3/4	9 1/4	3 1/2	3 3/8	1/2	1 3/4	5 1/2	3 9/16	27/32	13/16	2 3/16	2 9/16	20.00
	2 1/2	PKEB22440FH	PKB22440FH															
	60.00	PKEB224M60FH	PKB224M60FH	69.85	181.00	44.40	235.00	88.90	85.70	12.00	44.40	139.70	90.50	21.40	20.60	55.60	65.10	9.30
B448	2 11/16	PKEB22443FH	PKB22443FH	3 1/4	8 1/8	1 7/8	10 7/16	4	3 3/4	5/8	2 1/4	6 7/16	4 1/16	27/32	15/16	2 7/16	2 25/32	30.00
	2 3/4	PKEB22444FH	PKB22444FH															29.00
	2 15/16	PKEB22447FH	PKB22447FH															28.00
	3	PKEB22448FH	PKB22448FH															28.00
	65.00	PKEB224M65FH	PKB224M65FH															13.70
	70.00	PKEB224M70FH	PKB224M70FH	82.55	206.40	47.60	265.10	101.60	95.20	16.00	57.20	163.50	103.20	21.40	23.80	61.90	70.60	13.50
	75.00	PKEB224M75FH	PKB224M75FH															13.00
B456	3 3/16	PKEB22451FH	PKB22451FH	3 3/4	10	2	13	4 3/8	4 1/8	3/4	2 1/4	7 1/2	4 29/32	15/16	1 1/2	2 21/32	3	49.00
	3 7/16	PKEB22455FH	PKB22455FH															47.00
	3 1/2	PKEB22456FH	PKB22456FH															
	80.00	PKEB224M80FH	PKB224M80FH	95.25	254.00	50.80	330.20	111.12	104.80	20.00	57.20	190.50	124.60	23.80	38.10	67.50	76.20	22.00
	85.00	PKEB224M85FH	PKB224M85FH															21.50
B464	3 11/16	PKEB22459FH	PKB22459FH	4 1/4	12 1/2	2 1/4	15 1/4	5 1/16	4 1/2	3/4	2 5/8	8 1/2	5 5/8	1 1/16	1 1/4	3 1/16	3 7/16	76.00
	3 15/16	PKEB22463FH	PKB22463FH															74.00
	4	PKEB22464FH	PKB22464FH															73.00
	90.00	PKEB224M90FH	PKB224M90FH	107.95	317.50	57.20	387.40	128.59	114.30	20.00	66.70	215.90	142.90	27.00	31.80	77.80	87.30	35.20
	100.00	PKEB224M100FH	PKB224M100FH															33.50

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/- 0.13mm)
- Expansion - is 3/8" for all size codes
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



PKB22500F, PKEB22500F




Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Two hardened spring locking collars
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

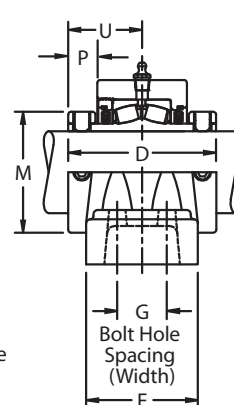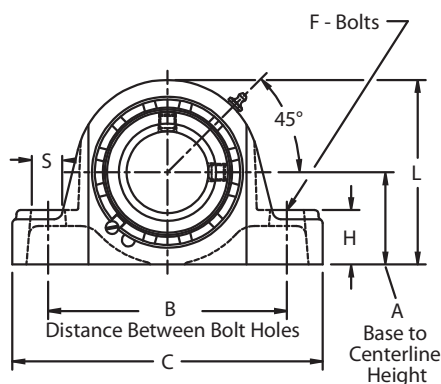

Fixed

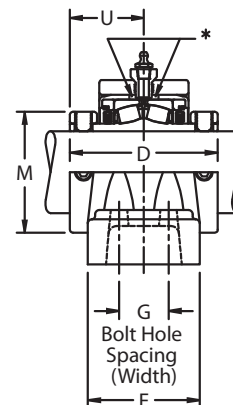

Expansion

Bearing Dimensions

Size Code	Shaft Diameter	Expansion	Fixed	A Base to Centerline Height	B Distance Between Bolt Holes	G Bolt Hole Spacing (Width)	C	D	E	F	H	L	M	P	S	U	Approx. Weight
		Part Number	Part Number														
B572	4 ³ / ₁₆	PKEB22567YFH	PKB22567YFH	4 ³ / ₄	13 ¹ / ₂	2 ¹ / ₂	16 ¹ / ₂	6 ¹ / ₄	4 ³ / ₄	³ / ₄	2 ³ / ₄	10	6 ³ / ₁₆	1	1 ²⁹ / ₆₄	3 ¹ / ₈	97.00
	4 ⁷ / ₁₆	PKEB22571YFH	PKB22571YFH														93.00
	4 ¹ / ₂	PKEB22572YFH	PKB22572YFH														92.00
	110.00	PKEB225M110YFH	PKB225M110YFH	120.65	342.90	63.50	419.10	158.75	120.60	20.00	69.80	254.00	157.16	25.4	36.90	79.50	43.00
	115.00	PKEB225M115YFH	PKB225M115YFH														41.70
B580	4 ¹⁵ / ₁₆	PKEB22579YFH	PKB22579YFH	5 ¹ / ₂	15 ¹ / ₂	2 ³ / ₄	18 ¹ / ₂	7 ⁷ / ₈	6 ³ / ₈	⁷ / ₈	3	11 ²³ / ₃₂	7 ¹ / ₁₆	1 ⁵ / ₃₂	1 ⁹ / ₁₆	3 ¹⁵ / ₁₆	125.00
	5	PKEB22580YFH	PKB22580YFH														124.00
	125.00	PKEB225M125YFH	PKB225M125YFH	139.70	393.70	69.80	469.90	200.02	161.93	24.00	76.20	297.66	179.38	29.37	39.69	100.01	56.60

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/-0.13mm)
- Expansion - is 3/8" for all size codes
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.

PKB22600, PKEB22600


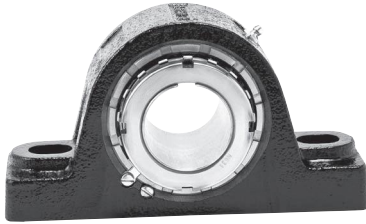


Photo Shows a 2-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

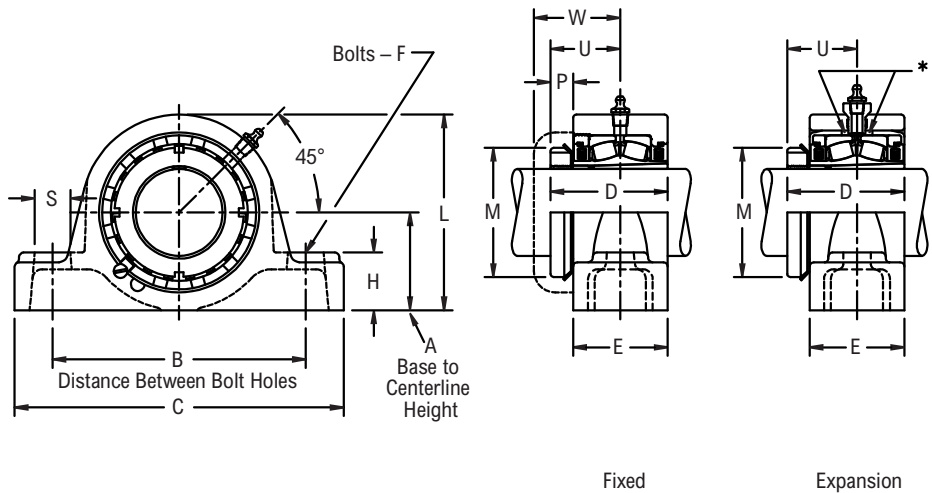

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		A Base to Centerline Height	B Distance Between Bolt Holes	C	D	E	F	H	M	P	U	S	W	Approx. Weight
		Part Number	L	Part Number	L													
B624	1 7/16	PKEB22623H	3 7/8	PKB22623H	3 11/16	1 7/8	5	6 7/8	2.71	2 1/4	1/2	1 3/16	2 1/4	1/2	1 39/64	13/16	2 3/16	7.00
B631	1 15/16	PKEB22631H	4 9/16	PKB22631H	4 9/16	2 1/4	6 1/4	8 3/8	3.08	2 1/2	5/8	1 3/8	2 31/32	39/64	1 55/64	15/16	2 9/32	12.00
B635	2 3/16	PKEB22635H	5	PKB22635H	5	2 1/2	6 3/4	8 7/8	3.16	2 9/16	5/8	1 5/8	3 5/32	5/8	1 29/32	15/16	2 7/16	16.00
B639	2 7/16	PKEB22639H	5 1/2	PKB22639H	5 1/2	2 3/4	7 1/8	9 1/4	3.28	2 11/16	5/8	1 3/4	3 5/8	45/64	1 31/32	15/16	2 9/16	18.00
B647	2 11/16	PKEB22643H	6 7/16	PKB22643H	6 7/16	3 1/4	8 1/8	10 7/16	3.86	3 3/16	3/4	2 1/4	4 5/32	56/64	2 19/64	1 1/16	2 25/32	30.00
	2 15/16	PKEB22647H		PKB22647H														29.00
B655	3 7/16	PKEB22655H	7 1/2	PKB22655H	7 1/2	3 3/4	10	13	4.29	3 7/16	7/8	2 1/4	4 15/16	7/8	2 37/64	1 5/8	3	43.00
B663	3 15/16	PKEB22663H	8 1/2	PKB22663H	8 1/2	4 1/4	11 3/4	15 1/4	4.94	4 3/16	1	2 5/8	5 7/16	1 5/16	2 15/16	2 1/4	3 7/16	62.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/-0.005" (+/-0.13mm)
- Expansion - is 3/8" for all size codes
- Dimensions for "D", "P" & "U" based on unmounted condition
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
 Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


PKB22600F, PKEB22600F



Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Corrosion-resistant powder coating
- Cast steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

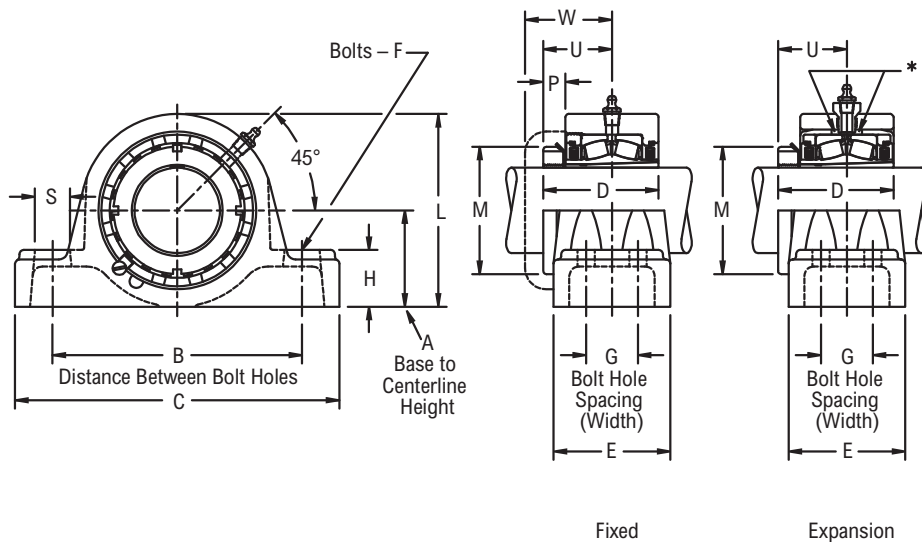

Bearing Dimensions

Size Code	Shaft Diameter	Expansion	Fixed	A Base to Centerline Height	B Distance Between Bolt Holes	G Bolt Hole Spacing (Width)	C	D	E	F	H	L	M	P	S	U	W	Approx. Weight
		Part Number	Part Number															
B631	1 ¹⁵ / ₁₆	PKEB22631FH	PKB22631FH	2 ¹ / ₄	6 ¹ / ₄	1 ¹⁹ / ₃₂	8 ³ / ₈	3.08	3 ³ / ₁₆	¹ / ₂	1 ³ / ₈	4 ⁹ / ₁₆	2 ³¹ / ₃₂	³⁹ / ₆₄	¹³ / ₁₆	1 ⁵⁵ / ₆₄	2 ⁹ / ₃₂	13.00
B635	2 ³ / ₁₆	PKEB22635FH	PKB22635FH	2 ¹ / ₂	6 ³ / ₄	1 ¹¹ / ₁₆	8 ⁷ / ₈	3.16	3 ¹ / ₄	¹ / ₂	1 ⁵ / ₈	5	3 ⁵ / ₃₂	⁵ / ₈	¹³ / ₁₆	1 ²⁹ / ₃₂	2 ⁷ / ₁₆	16.00
B639	2 ⁷ / ₁₆	PKEB22639FH	PKB22639FH	2 ³ / ₄	7 ¹ / ₈	1 ³ / ₄	9 ¹ / ₄	3.28	3 ³ / ₈	¹ / ₂	1 ³ / ₄	5 ¹ / ₂	3 ⁵ / ₈	⁵ / ₈	¹³ / ₁₆	1 ³¹ / ₃₂	2 ⁹ / ₁₆	20.00
B647	2 ¹¹ / ₁₆	PKEB22643FH	PKB22643FH	3 ¹ / ₄	8 ¹ / ₈	1 ⁷ / ₈	10 ⁷ / ₁₆	3.86	3 ³ / ₄	⁵ / ₈	2 ¹ / ₄	6 ⁷ / ₁₆	4 ⁵ / ₃₂	⁴⁵ / ₆₄	¹⁵ / ₁₆	2 ¹⁹ / ₆₄	2 ²⁵ / ₃₂	30.00
	2 ¹⁵ / ₁₆	PKEB22647FH	PKB22647FH															29.00
B655	3 ⁷ / ₁₆	PKEB22655FH	PKB22655FH	3 ³ / ₄	10	2	13	4.29	4 ¹ / ₈	³ / ₄	2 ¹ / ₄	7 ¹ / ₂	4 ¹⁵ / ₁₆	⁵⁶ / ₆₄	1 ¹ / ₂	2 ³⁷ / ₆₄	3	47.00
B663	3 ¹⁵ / ₁₆	PKEB22663FH	PKB22663FH	4 ¹ / ₄	12 ¹ / ₂	2 ¹ / ₄	15 ¹ / ₄	4.94	4 ¹ / ₂	³ / ₄	2 ⁵ / ₈	8 ¹ / ₂	5 ⁷ / ₁₆	¹⁵ / ₁₆	1 ¹ / ₄	2 ¹⁵ / ₁₆	3 ⁷ / ₁₆	74.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/- 0.13mm)
- Expansion - is 3/8" for all size codes
- Dimensions for "D", "P" & "U" based on unmounted condition
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


EPB22400, EPEB22400



Photo Shows a 2-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Self-aligning type E interchange
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

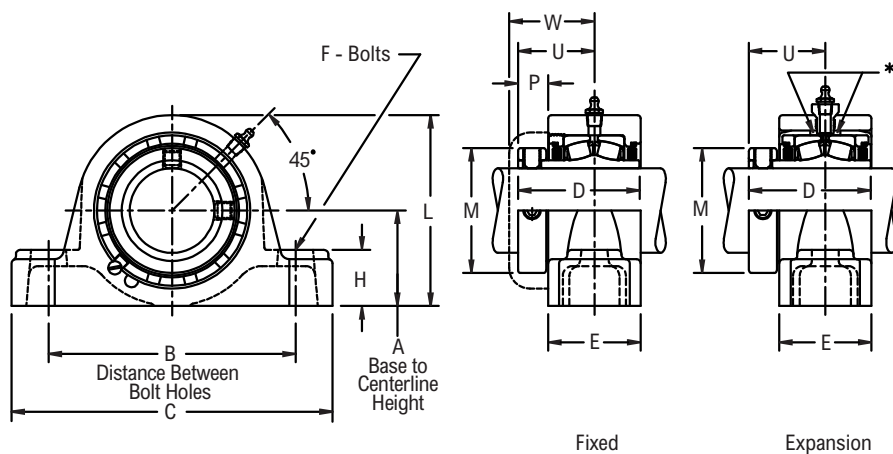

Bearing Dimensions

Size Code	Shaft Diameter	Expansion	Fixed	A Base to Centerline Height	B Distance Between Bolt Holes		C	D	E	F	H	L	M	P	U	W	Approx. Weight
		Part Number	Part Number		Min	Max											
B424	1 7/16	EPEB22423H	EPB22423H	1 7/8	4 3/4	6	7 3/8	2 7/8	2 1/4	1 1/2	1 1/8	3 7/8	2 5/16	2 1/32	1 25/32	2 3/16	8.00
	35.00	EPEB224M35H	EPB224M35H	47.62	120.60	152.40	187.30	73.02	57.20	12.00	28.60	98.40	58.70	16.70	45.20	55.60	3.10
B428	1 1/2	EPEB224B24H	EPB224B24H	2 1/8	5 1/4	6 1/2	7 7/8	3 1/8	2 1/2	1 1/2	1 1/4	4 3/8	2 19/32	2 1/32	1 29/32	2 1/4	11.00
	1 5/8	EPEB22426H	EPB22426H														
B432	1 11/16	EPEB22427H	EPB22427H	2 1/4	6 1/16	7 1/4	8 7/8	3 1/8	2 1/2	5/8	1 5/16	4 9/16	2 7/8	2 1/32	1 29/32	2 9/32	12.00
	40.00	EPEB224M40H	EPB224M40H														
B436	2	EPEB22432H	EPB22432H	2 1/2	6 9/16	8	9 5/8	3 5/16	2 9/16	5/8	1 1/2	5	3 1/4	2 5/32	2 1/16	2 7/16	15.00
	45.00	EPEB224M45H	EPB224M45H														
B440	2 1/4	EPEB22435H	EPB22435H	2 3/4	6 15/16	8 3/4	10 1/2	3 1/2	2 11/16	5/8	1 5/8	5 1/2	3 9/16	2 7/32	2 3/16	2 9/16	17.00
	55.00	EPEB224M55H	EPB224M55H														
B448	2 7/16	EPEB22439H	EPB22439H	3 1/8	7 13/16	9 3/4	11 13/16	4	3 3/16	3/4	1 7/8	6 5/16	4 1/16	2 7/32	2 7/16	2 25/32	28.00
	60.00	EPEB224M60H	EPB224M60H														
B456	2 11/16	EPEB22443H	EPB22443H	3 3/4	9 5/16	11 5/16	13 13/16	4 3/8	3 1/2	7/8	2 1/4	7 1/2	4 29/32	1 5/16	2 21/32	3	43.00
	70.00	EPEB224M70H	EPB224M70H														
B456	2 15/16	EPEB22444H	EPB22444H	3 1/2	9 5/16	11 5/16	13 13/16	4 3/8	3 1/2	7/8	2 1/4	7 1/2	4 29/32	1 5/16	2 21/32	3	43.00
	75.00	EPEB224M75H	EPB224M75H														
B456	3	EPEB22447H	EPB22447H	3 3/4	9 5/16	11 5/16	13 13/16	4 3/8	3 1/2	7/8	2 1/4	7 1/2	4 29/32	1 5/16	2 21/32	3	43.00
	80.00	EPEB224M80H	EPB224M80H														
B456	3 1/2	EPEB22448H	EPB22448H	3 3/4	9 5/16	11 5/16	13 13/16	4 3/8	3 1/2	7/8	2 1/4	7 1/2	4 29/32	1 5/16	2 21/32	3	43.00
	85.00	EPEB224M85H	EPB224M85H														

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/- 0.13mm)
- Expansion - is 3/8" for all size codes
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.

EPB22400F, EPEB22400F



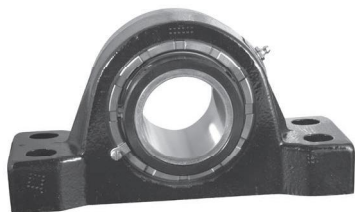


Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Self-aligning type E interchange
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

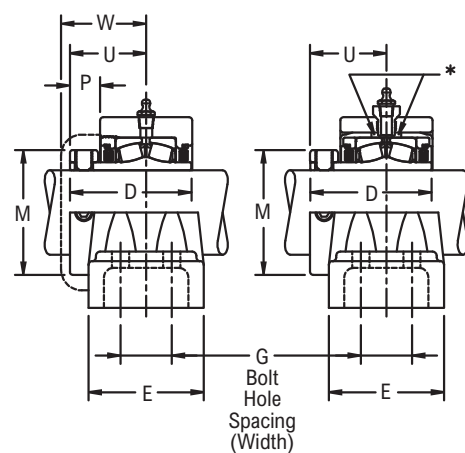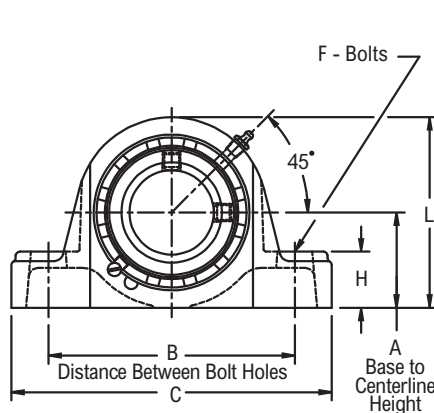

Bearing Dimensions

Size Code	Shaft Diameter	Expansion	Fixed	A Base to Centerline Height	B Distance Between Bolt Holes		G Bolt Hole Spacing (Width)	C	D	E	F	H	L	M	P	U	W	Approx. Weight
		Part Number	Part Number		Min	Max												
B440	2 1/4	EPEB224B36FH	EPB224B36FH	2 3/4	6 15/16	8 3/4	1 7/8	10 1/2	3 1/2	3 5/8	5/8	1 5/8	5 1/2	3 9/16	27/32	2 3/16	2 9/16	21.00
	2 7/16	EPEB22439FH	EPB22439FH															20.00
	2 1/2	EPEB22440FH	EPB22440FH															
	60.00	EPEB224M60FH	EPB224M60FH															8.80
B448	2 11/16	EPEB22443FH	EPB22443FH	3 1/8	7 13/16	9 7/8	2 1/8	11 13/16	4	4 1/4	5/8	1 7/8	6 5/16	4 1/16	27/32	2 7/16	2 25/32	31.00
	2 3/4	EPEB22444FH	EPB22444FH															
	2 15/16	EPEB22447FH	EPB22447FH															29.00
	3	EPEB22448FH	EPB22448FH															
	65.00	EPEB224M65FH	EPB224M65FH															14.00
	70.00	EPEB224M70FH	EPB224M70FH															13.80
	75.00	EPEB224M75FH	EPB224M75FH															13.30
B456	3 3/16	EPEB22451FH	EPB22451FH	3 3/4	9 5/16	11 5/16	2 3/8	13 13/16	4 3/8	4 3/4	3/4	2 1/4	7 1/2	4 29/32	15/16	2 21/32	3	47.00
	3 7/16	EPEB22455FH	EPB22455FH															46.00
	3 1/2	EPEB22456FH	EPB22456FH															45.00
	80.00	EPEB224M80FH	EPB224M80FH															21.30
	85.00	EPEB224M85FH	EPB224M85FH															20.80
B464	3 11/16	EPEB22459FH	EPB22459FH	4 1/4	11 7/8	13	2 1/4	15 1/4	5 1/16	4 1/2	3/4	2 5/8	8 1/2	5 5/8	1 1/16	3 1/16	3 7/16	69.00
	3 15/16	EPEB22463FH	EPB22463FH															67.00
	4	EPEB22464FH	EPB22464FH															66.00
	90.00	EPEB224M90FH	EPB224M90FH															32.10
	100.00	EPEB224M100FH	EPB224M100FH															30.30

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/- 0.13mm)
- Expansion - is 3/8" for all size codes
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


EPB22500, EPEB22500, EPB22500F, EPEB22500F



Photo Shows a 2-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

Self-aligning type E interchange
Corrosion-resistant powder coating
Cast iron housing
Misalignment capabilities - total of 4°
Broad range of sealing options
Factory set clearance & lubrication
Two hardened spring locking collars
Field interchangeable seals
Fixed or Expansion - total of 3/8" expansion
See Features & Benefits for additional info.

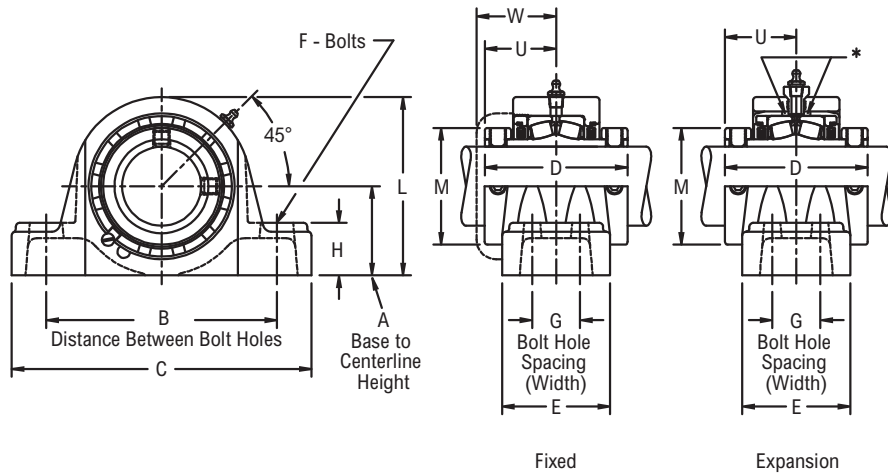

Bearing Dimensions

Size Code	Shaft Diameter	Expansion	Fixed	A Base to Centerline Height	B Distance Between Bolt Holes		G Bolt Hole Spacing (Width)	C	D	E	F	H	L	M	U	W	Approx. Weight
		Part Number	Part Number		Min	Max											
Two-Bolt Pillow Block																	
B524	1 7/16	EPEB22523H	EPB22523H	1 7/8	4 3/4	6	-	7 3/8	3 9/16	2 1/4	1/2	1 1/8	3 7/8	2 5/16	1 25/32	2 3/16	8.00
B528	1 11/16	EPEB22527H	EPB22527H	2 1/8	5 1/2	6 1/2	-	7 7/8	3 13/16	2 1/2	1/2	1 1/4	4 3/8	2 19/32	1 29/32	2 1/4	12.00
B531	1 15/16	EPEB22531H	EPB22531H	2 1/4	6 1/16	7 1/4	-	8 7/8	3 13/16	2 1/2	5/8	1 5/16	4 9/16	2 7/8	1 29/32	2 9/32	13.00
B536	2 3/16	EPEB22535H	EPB22535H	2 1/2	6 9/16	8	-	9 5/8	4 1/8	2 9/16	5/8	1 1/2	5	3 1/4	2 1/16	2 7/16	16.00
B540	2 7/16	EPEB22539H	EPB22539H	2 3/4	6 15/16	8 3/4	-	10 1/2	4 3/8	2 11/16	5/8	1 5/8	5 1/2	3 9/16	2 3/16	2 9/16	18.00
B548	2 11/16	EPEB22543H	EPB22543H	3 1/8	7 13/16	9 3/4	-	11 11/16	4 7/8	3 13/16	3/4	1 7/8	6 5/16	4 1/16	2 7/16	2 25/32	31.00
	2 15/16	EPEB22547H	EPB22547H														29.00
B556	3 7/16	EPEB22555H	EPB22555H	3 3/4	9 5/16	11 5/16	-	13 13/16	5 5/16	3 1/2	7/8	2 1/4	7 1/2	4 29/32	2 21/32	3	45.00
Four-Bolt Pillow Block																	
B540	2 7/16	EPEB22539FH	EPB22539FH	2 3/4	6 15/16	8 3/4	1 7/8	10 1/2	4 3/8	3 5/8	5/8	1 5/8	5 1/2	3 9/16	2 3/16	2 9/16	21.00
B548	2 11/16	EPEB22543FH	EPB22543FH	3 1/8	7 13/16	9 7/8	2 1/8	11 13/16	4 7/8	4 1/4	5/8	1 7/8	6 5/16	4 1/16	2 7/16	2 25/32	33.00
	2 15/16	EPEB22547FH	EPB22547FH														31.00
B556	3 7/16	EPEB22555FH	EPB22555FH	3 3/4	9 5/16	11 7/16	2 3/8	13 13/16	5 5/16	4 3/4	3/4	2 1/4	7 1/2	4 29/32	2 21/32	3	48.00
B564	3 15/16	EPEB22563FH	EPB22563FH	4 1/4	11 7/8	13	2 1/4	15 1/4	6 1/8	4 1/2	3/4	2 5/8	8 5/8	5 5/8	3 1/16	3 7/16	71.00
	4	EPEB22564FH	EPB22564FH														70.00
B572	4 3/16	EPEB22567YFH	EPB22567YFH	4 3/4	12 3/4	14 1/8	2 1/2	16 1/2	6 1/4	4 5/8	3/4	2 3/4	9 3/8	6 3/16	3 1/8	-	92.00
	4 7/16	EPEB22571YFH	EPB22571YFH														88.00
	4 1/2	EPEB22572YFH	EPB22572YFH														87.00
	110.00	EPEB225M110YFH	EPB225M110YFH														120.65
	115.00	EPEB225M115YFH	EPB225M115YFH														39.50
B580	4 15/16	EPEB22579YFH	EPB22579YFH	5 1/2	14 5/16	16 1/8	2 3/4	18 1/2	7 7/8	5 9/16	7/8	3	11 1/8	7 1/16	3 15/16	-	129.00
	5	EPEB22580YFH	EPB22580YFH														128.00
	125.00	EPEB225M125YFH	EPB225M125YFH														139.70

Additional Notes

Please call 1-866-REXNORD for availability
Lubrication fitting tap size, 1/8" PT
Base to centerline tolerance, +/- .005" (+/- 0.13mm)
Expansion - is 3/8" for all size codes
H labyrinth seals standard

All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



EPB22600, EPEB22600



Photo Shows a 2-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Self-aligning type E interchange
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

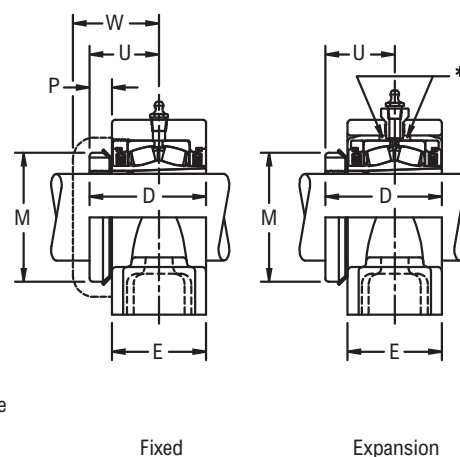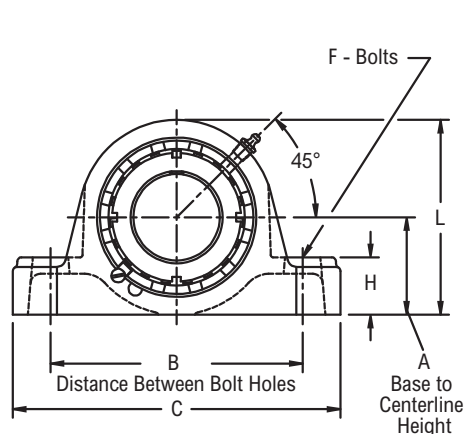

Fixed

Expansion

Bearing Dimensions

Size Code	Shaft Diameter	Expansion	Fixed	A Base to Centerline Height	B Distance Between Bolt Holes		C	D	E	F	H	L	M	P	U	W	Approx. Weight
		Part Number	Part Number		Min	Max											
B624	1 7/16	EPEB22623H	EPB22623H	1 7/8	4 3/4	6	7 3/8	2.71	2 1/4	1/2	1 1/8	3 7/8	2 1/4	1/2	1 39/64	2 3/16	8.00
B631	1 15/16	EPEB22631H	EPB22631H	2 1/4	6 1/16	7 1/4	8 7/8	3.08	2 1/2	5/8	1 5/16	4 9/16	2 31/32	39/64	1 55/64	2 9/32	12.00
B635	2 3/16	EPEB22635H	EPB22635H	2 1/2	6 9/16	8	9 5/8	3.16	2 9/16	5/8	1 1/2	5	3 5/32	5/8	1 29/32	2 7/16	15.00
B639	2 7/16	EPEB22639H	EPB22639H	2 3/4	6 15/16	8 3/4	10 1/2	3.28	2 11/16	5/8	1 5/8	5 1/2	3 5/8	45/64	1 31/32	2 9/16	17.00
B647	2 11/16	EPEB22643H	EPB22643H	3 1/8	7 13/16	9 3/4	11 13/16	3.86	3 3/16	3/4	1 7/8	6 5/16	4 5/32	55/64	2 19/64	2 25/32	29.00
	2 15/16	EPEB22647H	EPB22647H														27.00
B655	3 7/16	EPEB22655H	EPB22655H	3 3/4	9 5/16	11 5/16	13 13/16	4.29	3 1/2	7/8	2 1/4	7 1/2	4 15/16	7/8	2 37/64	3	43.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/- .005" (+/- 0.13mm)
- Expansion - is 3/8" for all size codes
- Dimensions for "D", "P" & "U" based on unmounted condition
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


EPB22600F, EPEB22600F



Photo Shows a 4-Bolt Spherical Roller Bearing Pillow Block Unit

Product Features

- Self-aligning type E interchange
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- Fixed or Expansion - total of 3/8" expansion
- See Features & Benefits for additional info.

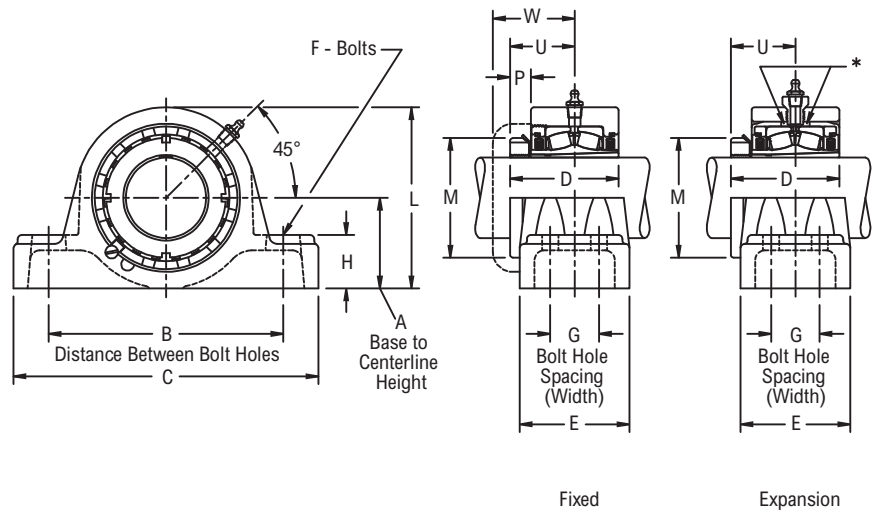

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		A Base to Centerline Height	B Distance Between Bolt Holes		G Bolt Hole Spacing (Width)	C	D	E	F	H	L	M	P	U	W	Approx. Weight
		Part Number	Part Number	Min	Max															
B639	2 ⁷ / ₁₆	EPEB22639FH	EPB22639FH	2 ³ / ₄	6 ¹⁵ / ₁₆	8 ³ / ₄	1 ⁷ / ₈	10 ¹ / ₂	3.28	3 ⁵ / ₈	⁵ / ₈	1 ⁵ / ₈	5 ¹ / ₂	3 ⁵ / ₈	⁵ / ₈	1 ³¹ / ₃₂	2 ⁹ / ₁₆	20.00		
B647	2 ¹¹ / ₁₆	EPEB22643FH	EPB22643FH	3 ¹ / ₈	7 ¹³ / ₁₆	9 ⁷ / ₈	2 ¹ / ₈	11 ¹³ / ₁₆	3.86	4 ¹ / ₄	⁵ / ₈	1 ⁷ / ₈	6 ⁵ / ₁₆	4 ⁵ / ₃₂	45/ ₆₄	2 ¹⁹ / ₆₄	2 ²⁵ / ₃₂	29.00		
	2 ¹⁵ / ₁₆	EPEB22647FH	EPB22647FH																	
B655	3 ⁷ / ₁₆	EPEB22655FH	EPB22655FH	3 ³ / ₄	9 ⁵ / ₁₆	11 ⁵ / ₁₆	2 ³ / ₈	13 ¹³ / ₁₆	4.29	4 ³ / ₄	³ / ₄	2 ¹ / ₄	7 ¹ / ₂	4 ¹⁵ / ₁₆	55/ ₆₄	2 ³⁷ / ₆₄	3	46.00		

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Base to centerline tolerance, +/-0.005" (+/-0.13mm)
- Expansion - is 3/8" for all size codes
- Dimensions for "D", "P" & "U" based on unmounted condition
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
 Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


FB22400, FEB22400



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- Fixed or Expansion - total of 3/8 in expansion
- See Features & Benefits for additional info.

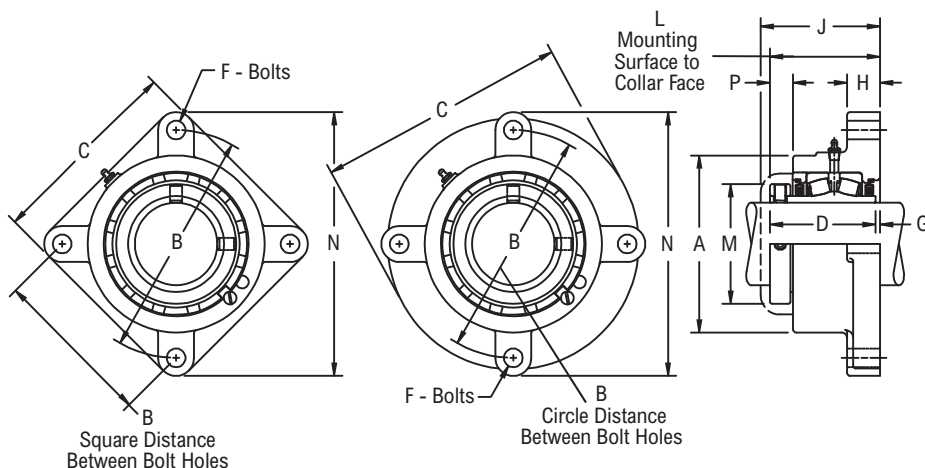

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		B Distance Between Bolt Holes		L Mounting Surface to Collar Face	C	D	F Bolts	G	H	J	M	N	P	Approx. Weight
		Part Number	A	Part Number	A	Square	Circle											
3-Bolt Round																		
B416	1	FEB22416H	3 1/4	FB22416H	2 7/8	-	4 1/8	2 19/32	4 3/4	2 9/16	3/8	1/32	9/16	2 15/16	1 3/4	5 1/8	17/32	3.00
	25.00	FEB224M25H	82.60	FB224M25H	73.00	-	104.78	65.90	120.60	65.09	10.00	0.80	14.30	74.60	44.40	130.20	13.50	1.30
B420	1 3/16	FEB22419H	3 1/2	FB22419H	3 1/8	-	4 1/2	2 23/32	5 1/8	2 11/16	3/8	1/32	19/32	3 1/16	1 31/32	5 1/2	17/32	6.00
	1 1/4	FEB22420H		FB22420H														
	30.00	FEB224M30H	88.90	FB224M30H	79.40	-	114.30	69.00	130.20	68.26	10.00	0.80	15.10	77.80	50.00	139.70	13.50	2.40
B424	1 7/16	FEB22423H	3 3/4	FB22423H	3 7/16	-	5	2 29/32	5 7/8	2 7/8	1/2	1/32	5/8	3 5/16	2 5/16	6 1/4	21/32	7.00
	1 1/2	FEB22424H		FB22424H														
	35.00	FEB224M35H	95.20	FB224M35H	87.30	-	127.00	73.80	149.20	73.02	12.00	0.80	15.90	84.10	58.70	158.80	16.70	3.20
4-Bolt Round																		
B428	1 5/8	FEB22426H	4 1/4	FB22426H	3 15/16	3 57/64	5 1/2	3 5/32	6 3/8	3 1/8	1/2	1/32	5/8	3 1/2	2 19/32	6 3/4	21/32	9.00
	1 11/16	FEB22427H		FB22427H														
	1 3/4	FEB22428H	FB22428H															
	40.00	FEB224M40H	108.00	FB224M40H	100.00	98.83	139.70	80.20	161.90	79.38	12.00	0.80	15.90	88.90	65.90	171.40	16.70	4.30
B432	1 15/16	FEB22431H	4 1/2	FB22431H	4 1/4	4 1/16	5 3/4	3 3/16	6 11/16	3 1/8	1/2	1/16	11/16	3 9/16	2 7/8	7	21/32	10.00
	2	FEB22432H		FB22432H														
	45.00	FEB224M45H	114.30	FB224M45H	108.00	103.17	146.05	81.00	169.90	79.38	12.00	1.60	17.50	90.50	73.00	177.80	16.70	5.00
	50.00	FEB224M50H		FB224M50H														4.70
B436	2 3/16	FEB22435H	4 7/8	FB22435H	4 7/8	4 1/2	6 3/8	3 13/32	7 3/8	3 5/16	5/8	3/32	11/16	3 25/32	3 1/4	7 3/4	25/32	14.00
	2 1/4	FEB22436H		FB22436H														
	55.00	FEB224M55H	123.80	FB224M55H	123.80	114.30	161.92	86.50	187.30	84.14	16.00	2.40	17.50	96.00	82.60	196.80	19.80	6.50
B440	2 7/16	FEB22439H	5 3/8	FB22439H	5 3/8	4 49/64	6 3/4	3 19/32	7 3/4	3 1/2	5/8	3/32	3/4	3 31/32	3 9/16	8 1/8	27/32	17.00
	2 1/2	FEB22440H		FB22440H														
	60.00	FEB224M60H	136.50	FB224M60H	136.50	121.06	171.45	91.30	196.80	88.90	16.00	2.40	19.00	100.80	90.50	206.40	21.40	7.90
B448	2 11/16	FEB22443H	6 1/4	FB22443H	6 1/4	5 9/16	7 7/8	4 3/32	9 1/8	4	3/4	3/32	7/8	4 7/16	4 1/16	9 1/2	27/32	28.00
	2 3/4	FEB22444H		FB22444H														
	2 15/16	FEB22447H	FB22447H															27.00
	3	FEB22448H	FB22448H															26.00
	65.00	FEB224M65H		FB224M65H														12.70
	70.00	FEB224M70H	158.80	FB224M70H	158.80	141.27	200.02	104.00	231.80	101.60	20.00	2.40	22.20	112.70	103.20	241.30	21.40	12.50
	75.00	FEB224M75H		FB224M75H														12.00
4-Bolt Square																		
B456	3 3/16	FEB22451H	7 3/8	FB22451H	7 3/8	6 23/32	9 1/2	4 9/16	8 7/16	4 3/8	3/4	1/4	1	4 29/32	4 29/32	11 7/16	15/16	41.00
	3 7/16	FEB22455H		FB22455H														
	3 1/2	FEB22456H	FB22456H															39.00
	80.00	FEB224M80H	187.30	FB224M80H	187.30	170.64	241.30	115.90	214.31	111.12	20.00	6.40	25.40	124.60	124.60	290.50	23.80	18.60
	85.00	FEB224M85H		FB224M85H														18.10

Continued...

Continued...

Bearing Dimensions

Size Code		Shaft Diameter		Expansion		Fixed		B Distance Between Bolt Holes		L Mounting Surface to Collar Face	C	D	F Bolts	G	H	J	M	N	P	Approx. Weight	
		Part Number	A	Part Number	A																
						Square	Circle														
4-Bolt Square (continued)																					
B464	3 ¹¹ / ₁₆	FEB22459H	8 ³ / ₈	FB22459H	8 ¹ / ₂	7 ¹⁹ / ₃₂	10 ³ / ₄	5 ⁷ / ₃₂	9 ³ / ₄	5 ¹ / ₁₆	7/ ₈	1/ ₄	1 ¹ / ₈	5 ⁵ / ₈	5 ⁵ / ₈	12 ²⁹ / ₃₂	1 ¹ / ₃₂				59.00
	3 ¹⁵ / ₁₆	FEB22463H		FB22463H																	57.00
	4	FEB22464H		FB22464H																	
	90.00	FEB224M90H	FB224M90H	27.70																	
	100.00	FEB224M100H	FB224M100H	25.90																	

Additional Notes

Please call 1-866-REXNORD for availability
 Lubrication fitting tap size, 1/8 in PT
 Expansion - is 3/8 in for all size codes
 For expansion units, dimensions "G", "L" & "P" are minimum values.
 For maximum values, add 3/8 in
 H labyrinth seals standard
 All size codes available with type E lip seals, except E7 in size code B416

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
 Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



FB22600, FEB22600



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- Fixed or Expansion - total of 3/8 in expansion
- See Features & Benefits for additional info.

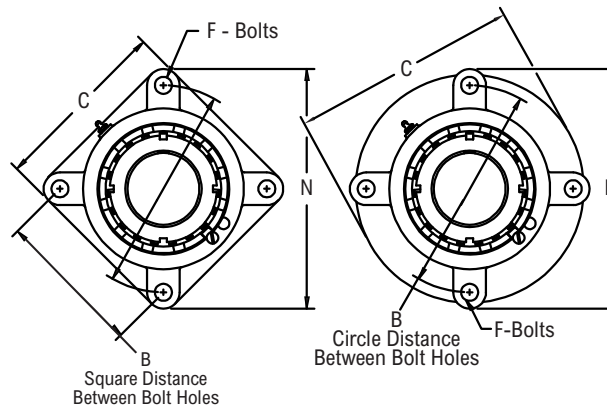

Bearing Dimensions

Size Code	Shaft Diameter	Expansion		Fixed		B Distance Between Bolt Holes		L Mounting Surface to Collar Face	C	D	F Bolts	H	J	M	N	P	Approx. Weight
		Part Number	A	Part Number	A	Square	Circle										
3-Bolt Round																	
B624	1 ⁷ / ₁₆	FEB22623H	3 ³ / ₄	FB22623H	3 ⁷ / ₁₆	-	5	2 ³ / ₄	5 ⁷ / ₈	2.71	¹ / ₂	⁵ / ₈	3 ⁵ / ₁₆	2 ¹ / ₄	6 ¹ / ₄	¹ / ₂	7.00
4-Bolt Round																	
B631	1 ¹⁵ / ₁₆	FEB22631H	4 ¹ / ₂	FB22631H	4 ¹ / ₄	4 ¹ / ₁₆	5 ³ / ₄	3 ⁹ / ₆₄	6 ¹¹ / ₁₆	3.08	¹ / ₂	¹¹ / ₁₆	3 ⁹ / ₁₆	2 ³¹ / ₃₂	7	⁵ / ₈	10.00
B635	2 ³ / ₁₆	FEB22635H	4 ⁷ / ₈	FB22635H	4 ⁷ / ₈	4 ¹ / ₂	6 ³ / ₈	3 ¹⁷ / ₆₄	7 ³ / ₈	3.16	⁵ / ₈	¹¹ / ₁₆	3 ²⁵ / ₃₂	3 ⁵ / ₃₂	7 ³ / ₄	⁴¹ / ₆₄	14.00
B639	2 ⁷ / ₁₆	FEB22639H	5 ³ / ₈	FB22639H	5 ³ / ₈	4 ⁴⁹ / ₆₄	6 ³ / ₄	3 ³ / ₈	7 ³ / ₄	3.28	⁵ / ₈	³ / ₄	3 ³¹ / ₃₂	3 ⁵ / ₈	8 ¹ / ₈	⁵ / ₈	17.00
B647	2 ¹¹ / ₁₆	FEB22643H	6 ¹ / ₄	FB22643H	6 ¹ / ₄	5 ⁹ / ₁₆	7 ⁷ / ₈	3 ³¹ / ₃₂	9 ¹ / ₈	3.86	³ / ₄	⁷ / ₈	4 ⁷ / ₁₆	4 ⁵ / ₃₂	9 ¹ / ₂	⁴⁵ / ₆₄	27.00
	2 ¹⁵ / ₁₆	FEB22647H		FB22647H													26.00
4-Bolt Square																	
B655	3 ⁷ / ₁₆	FEB22655H	7 ³ / ₈	FB22655H	7 ³ / ₈	6 ²³ / ₃₂	9 ¹ / ₂	4 ³¹ / ₆₄	8 ⁷ / ₁₆	4.29	³ / ₄	1	4 ²⁹ / ₃₂	4 ¹⁵ / ₁₆	11 ⁷ / ₁₆	⁵⁵ / ₆₄	39.00
B663	3 ¹⁵ / ₁₆	FEB22663H	8 ³ / ₈	FB22663H	8 ¹ / ₂	7 ¹⁹ / ₃₂	10 ³ / ₄	5 ⁷ / ₆₄	9 ³ / ₄	4.94	⁷ / ₈	1 ¹ / ₈	5 ⁵ / ₈	5 ⁷ / ₁₆	12 ²⁹ / ₃₂	⁵⁹ / ₆₄	57.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8 in PT
- Expansion - is 3/8 in for all size codes
- Dimensions for "D", "L" & "P" based on unmounted condition
- For expansion units, dimensions "G", "L" & "P" are minimum values.
- For maximum values, add 3/8 in
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
 Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



EFRB22400



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Unit

Product Features

Self aligning type E interchange
Corrosion-resistant powder coating
Cast iron housing
Misalignment capabilities - total of 4°
Broad range of sealing options
Factory set clearance & lubrication
Hardened spring locking collar
Field interchangeable seals
See Features & Benefits for additional info.

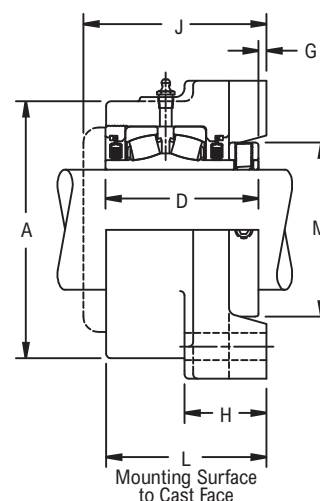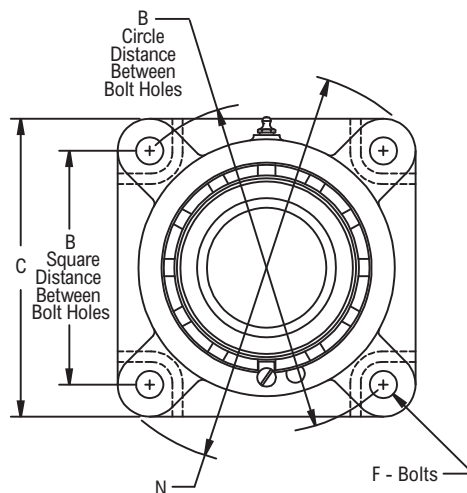

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	B Distance Between Bolt Holes		L Mounting Surface to Cast Face	A	C	D	F Bolts	G	H	J	M	N	Approx. Weight
			Square	Circle											
B424	1 ⁷ / ₁₆	EFRB22423H	3 ¹ / ₂	4 ⁶¹ / ₆₄	2 ³¹ / ₃₂	3 ¹¹ / ₁₆	4 ⁹ / ₈	2 ⁷ / ₈	¹ / ₂	¹ / ₁₆	1 ³ / ₈	4 ¹ / ₃₂	2 ⁵ / ₁₆	6 ¹ / ₁₆	8.00
	35.00	EFRB224M35H	88.90	125.81	75.40	93.70	117.50	73.02	12.00	1.60	34.90	102.40	58.70	154.00	3.40
B428	1 ¹ / ₂	EFRB224B24H	4 ¹ / ₈	5 ⁵³ / ₆₄	3 ⁹ / ₃₂	4 ¹ / ₄	5 ³ / ₈	3 ¹ / ₈	¹ / ₂	¹ / ₈	1 ⁷ / ₁₆	4 ⁹ / ₃₂	2 ¹⁹ / ₃₂	7 ⁷ / ₃₂	11.00
	1 ⁹ / ₈	EFRB22426H													10.00
	1 ¹¹ / ₁₆	EFRB22427H													10.00
	40.00	EFRB224M40H													5.10
B432	1 ³ / ₄	EFRB224B28H	4 ³ / ₈	6 ³ / ₁₆	3 ⁹ / ₃₂	4 ¹ / ₂	5 ⁵ / ₈	3 ¹ / ₈	¹ / ₂	¹ / ₈	1 ⁷ / ₁₆	4 ⁵ / ₁₆	2 ⁷ / ₈	7 ⁵ / ₁₆	11.00
	1 ¹⁵ / ₁₆	EFRB22431H													10.00
	2	EFRB22432H													10.00
	45.00	EFRB224M45H													5.30
B436	50.00	EFRB224M50H	111.10	157.18	83.30	114.30	142.90	79.38	12.00	3.20	36.50	109.50	73.00	185.70	5.00
	2 ³ / ₁₆	EFRB22435H	4 ⁷ / ₈	6 ⁵⁷ / ₆₄	3 ¹ / ₂	5	6 ¹ / ₄	3 ⁵ / ₁₆	⁵ / ₈	¹ / ₈	1 ⁹ / ₁₆	4 ⁵ / ₈	3 ¹ / ₄	8 ⁹ / ₃₂	15.00
	55.00	EFRB224M55H													7.10
	2 ¹ / ₄	EFRB224B36H													18.00
B440	2 ⁷ / ₁₆	EFRB22439H	5 ³ / ₈	7 ¹⁹ / ₃₂	3 ²³ / ₃₂	5 ¹ / ₂	6 ⁷ / ₈	3 ¹ / ₂	⁵ / ₈	³ / ₁₆	1 ²³ / ₃₂	4 ¹⁵ / ₁₆	3 ⁹ / ₁₆	8 ³¹ / ₃₂	17.00
	2 ¹ / ₂	EFRB22440H													17.00
	60.00	EFRB224M60H													7.90
	136.50	EFRB224M136H	192.89	268.99	164.50	221.70	284.60	174.60	221.70	16.00	4.80	125.40	90.50	227.80	7.90
B448	2 ¹¹ / ₁₆	EFRB22443H	6	8 ³¹ / ₆₄	4 ⁷ / ₃₂	6 ¹ / ₂	7 ³ / ₄	4	³ / ₄	³ / ₁₆	1 ²⁵ / ₃₂	5 ¹³ / ₃₂	4 ¹ / ₁₆	10 ¹ / ₈	26.00
	2 ³ / ₄	EFRB22444H													25.00
	2 ¹⁵ / ₁₆	EFRB22447H													24.00
	3	EFRB22448H													24.00
B456	65.00	EFRB224M65H	152.40	215.49	107.20	165.10	196.90	101.60	20.00	4.80	45.20	137.30	103.20	257.20	11.70
	70.00	EFRB224M70H													11.50
	75.00	EFRB224M75H													11.00
	80.00	EFRB224M80H													18.90
B464	85.00	EFRB224M85H	177.80	251.23	118.30	187.30	235.00	111.12	20.00	6.40	50.00	146.00	124.60	296.10	18.40
	3 ³ / ₁₆	EFRB22451H	7	9 ⁵⁹ / ₆₄	4 ²¹ / ₃₂	7 ³ / ₈	9 ¹ / ₄	4 ³ / ₈	³ / ₄	¹ / ₄	1 ³¹ / ₃₂	5 ³ / ₄	4 ²⁹ / ₃₂	11 ²¹ / ₃₂	42.00
	3 ⁷ / ₁₆	EFRB22455H													41.00
	3 ¹ / ₂	EFRB22456H													40.00
B464	80.00	EFRB224M80H													18.90
	85.00	EFRB224M85H	177.80	251.23	118.30	187.30	235.00	111.12	20.00	6.40	50.00	146.00	124.60	296.10	18.40
	3 ¹¹ / ₁₆	EFRB22459H	7 ³ / ₄	10 ⁶¹ / ₆₄	5 ¹⁵ / ₃₂	8 ⁷ / ₈	9 ³ / ₄	5 ¹ / ₁₆	⁷ / ₈	¹ / ₄	2 ⁷ / ₃₂	6 ⁵ / ₈	5 ⁵ / ₈	12 ³¹ / ₃₂	58.00
	3 ¹⁵ / ₁₆	EFRB22463H													56.00
	4	EFRB22464H													56.00
	90.00	EFRB224M90H													27.20
B464	100.00	EFRB224M100H	196.80	278.21	138.90	247.65	247.65	128.59	24.00	6.40	56.40	168.30	142.90	329.40	25.40

Additional Notes

Please call 1-866-REXNORD for availability
Lubrication fitting tap size, 1/8 in PT
H labyrinth seals standard
All size codes available with type E lip seals & E7 triple lip seals
For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


EFB22500



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Unit

Product Features

- Self aligning type E interchange
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Two hardened spring locking collars
- Field interchangeable seals
- See Features & Benefits for additional info.

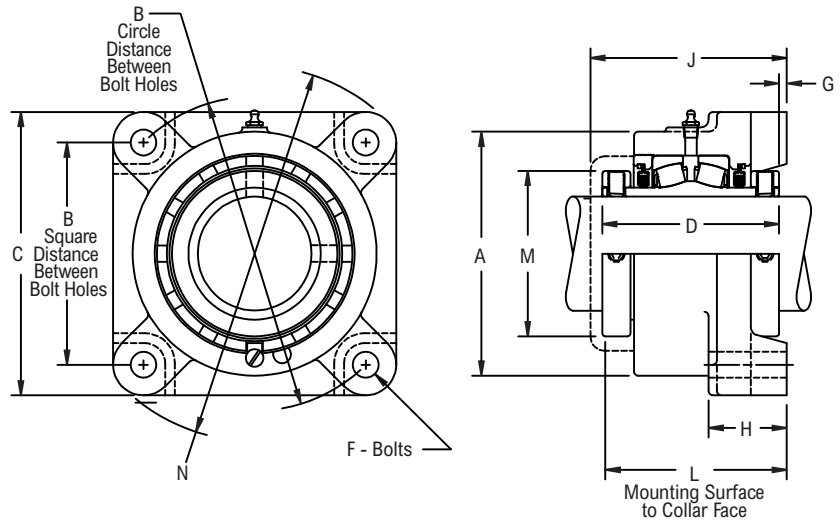

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	B Distance Between Bolt Holes		L Mounting Surface to Collar Face	A	C	D	F Bolts	G	H	J	M	N	Approx. Weight
			Square	Circle											
B524	1 ⁷ / ₁₆	EFB22523H	3 ¹ / ₂	4 ⁶¹ / ₆₄	3 ⁵ / ₈	3 ¹¹ / ₁₆	4 ⁵ / ₈	3 ⁹ / ₁₆	1/2	1/16	1 ³ / ₈	4 ¹ / ₃₂	2 ⁵ / ₁₆	6 ¹ / ₁₆	8.00
B528	1 ¹¹ / ₁₆	EFB22527H	4 ¹ / ₈	5 ⁵³ / ₆₄	3 ¹⁵ / ₁₆	4 ¹ / ₄	5 ³ / ₈	3 ¹³ / ₁₆	1/2	1/8	1 ⁷ / ₁₆	4 ⁹ / ₃₂	2 ¹⁹ / ₃₂	7 ⁷ / ₃₂	11.00
B531	1 ¹⁵ / ₁₆	EFB22531H	4 ³ / ₈	6 ³ / ₁₆	3 ¹⁵ / ₁₆	4 ¹ / ₂	5 ⁵ / ₈	3 ¹³ / ₁₆	1/2	1/8	1 ⁷ / ₁₆	4 ⁵ / ₁₆	2 ⁷ / ₈	7 ⁵ / ₁₆	12.00
B536	2 ³ / ₁₆	EFB22535H	4 ⁷ / ₈	6 ⁵⁷ / ₆₄	4 ¹ / ₄	5	6 ¹ / ₄	4 ¹ / ₈	5/8	1/8	1 ⁹ / ₁₆	4 ⁵ / ₈	3 ¹ / ₄	8 ⁹ / ₃₂	16.00
B540	2 ⁷ / ₁₆	EFB22539H	5 ³ / ₈	7 ¹⁹ / ₃₂	4 ⁹ / ₁₆	5 ¹ / ₂	6 ⁷ / ₈	4 ³ / ₈	5/8	3/16	1 ²³ / ₃₂	4 ¹⁵ / ₁₆	3 ⁹ / ₁₆	8 ³¹ / ₃₂	18.00
B548	2 ¹¹ / ₁₆	EFB22543H	6	8 ³¹ / ₆₄	5 ¹ / ₁₆	6 ¹ / ₂	7 ³ / ₄	4 ⁷ / ₈	3/4	3/16	1 ²⁵ / ₃₂	5 ¹³ / ₁₆	4 ¹ / ₁₆	10 ¹ / ₈	28.00
	2 ¹⁵ / ₁₆	EFB22547H													26.00
B556	3 ⁷ / ₁₆	EFB22555H	7	9 ⁵⁹ / ₆₄	5 ¹³ / ₃₂	7 ³ / ₈	9 ¹ / ₄	5 ⁵ / ₁₆	3/4	1/4	1 ³¹ / ₃₂	5 ³ / ₄	4 ²⁹ / ₃₂	11 ²¹ / ₃₂	44.00
B564	3 ¹⁵ / ₁₆	EFB22563H	7 ³ / ₄	10 ⁶¹ / ₆₄	6 ⁷ / ₃₂	8 ⁷ / ₈	10 ¹ / ₄	6 ¹ / ₈	7/8	1/4	2 ⁷ / ₃₂	6 ⁵ / ₈	5 ⁵ / ₈	12 ³¹ / ₃₂	60.00
	4	EFB22564H													59.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8 in PT
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
- Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


EFB22600



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Unit

Product Features

- Self aligning type E interchange
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- See Features & Benefits for additional info.

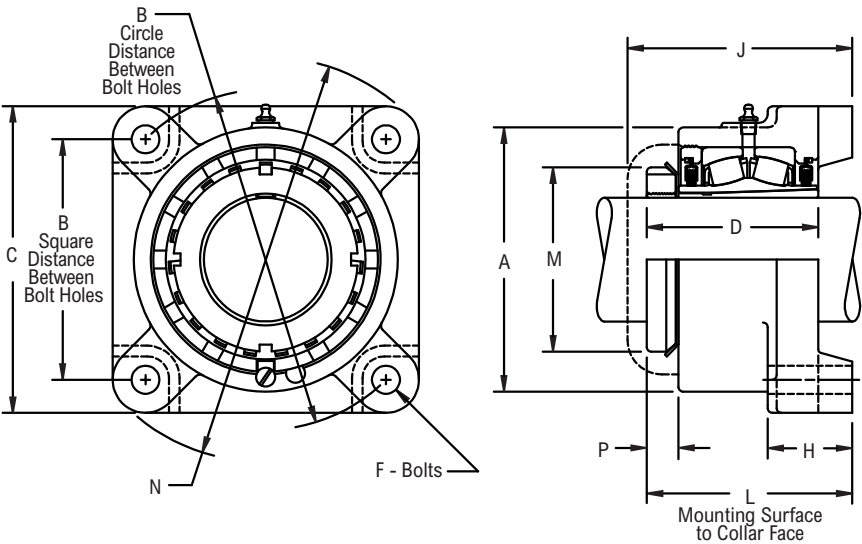

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	B Distance Between Bolt Holes		L Mounting Surface to Collar Face	A	C	D	F Bolts	H	J	M	N	P	Approx. Weight
			Square	Circle											
B624	1 ⁷ / ₁₆	EFB22623H	3 ¹ / ₂	4 ⁶¹ / ₆₄	3 ²⁹ / ₆₄	3 ¹¹ / ₁₆	4 ⁵ / ₈	2.71	¹ / ₂	1 ³ / ₈	4 ¹ / ₃₂	2 ¹ / ₄	6 ¹ / ₁₆	³¹ / ₆₄	8.00
B631	1 ¹⁵ / ₁₆	EFB22631H	4 ³ / ₈	6 ³ / ₁₆	3 ⁵⁷ / ₆₄	4 ¹ / ₂	5 ⁵ / ₈	3.08	¹ / ₂	1 ⁷ / ₁₆	4 ⁵ / ₁₆	2 ³¹ / ₃₂	7 ⁵ / ₁₆	³⁹ / ₆₄	11.00
B635	2 ³ / ₁₆	EFB22635H	4 ⁷ / ₈	6 ⁵⁷ / ₆₄	4 ³ / ₃₂	5	6 ¹ / ₄	3.16	⁵ / ₈	1 ⁹ / ₁₆	4 ⁵ / ₈	3 ⁵ / ₃₂	8 ⁹ / ₃₂	⁵ / ₈	15.00
B639	2 ⁷ / ₁₆	EFB22639H	5 ³ / ₈	7 ¹⁹ / ₃₂	4 ¹¹ / ₃₂	5 ¹ / ₂	6 ⁷ / ₈	3.28	⁵ / ₈	1 ²³ / ₃₂	4 ¹⁵ / ₁₆	3 ⁵ / ₈	8 ³¹ / ₃₂	⁵ / ₈	17.00
B647	2 ¹¹ / ₁₆	EFB22643H	6	8 ³¹ / ₆₄	4 ⁵⁹ / ₆₄	6 ¹ / ₂	7 ³ / ₄	3.86	³ / ₄	1 ²⁵ / ₃₂	5 ¹³ / ₃₂	4 ⁵ / ₃₂	10 ¹ / ₈	⁴⁵ / ₆₄	25.00
	2 ¹⁵ / ₁₆	EFB22647H													24.00
B655	3 ⁷ / ₁₆	EFB22655H	7	9 ⁵⁹ / ₆₄	5 ²¹ / ₆₄	7 ³ / ₈	9 ¹ / ₄	4.29	³ / ₄	1 ³¹ / ₃₂	5 ³ / ₄	4 ¹⁵ / ₁₆	11 ²¹ / ₃₂	⁵⁵ / ₆₄	41.00
B663	3 ¹⁵ / ₁₆	EFB22663H	7 ³ / ₄	10 ⁶¹ / ₆₄	6 ⁷ / ₆₄	8 ⁷ / ₈	10 ¹ / ₄	4.94	⁷ / ₈	2 ⁷ / ₃₂	6 ⁵ / ₈	5 ⁷ / ₁₆	12 ³¹ / ₃₂	⁵⁹ / ₆₄	56.00

Additional Notes


- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8 in PT
- Dimensions for "D", "L" & "P" based on unmounted condition
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
- Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Bracket Unit with High-Test Iron Housing

Product Features

- Corrosion-resistant powder coating
- High test iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- See Features & Benefits for additional info.

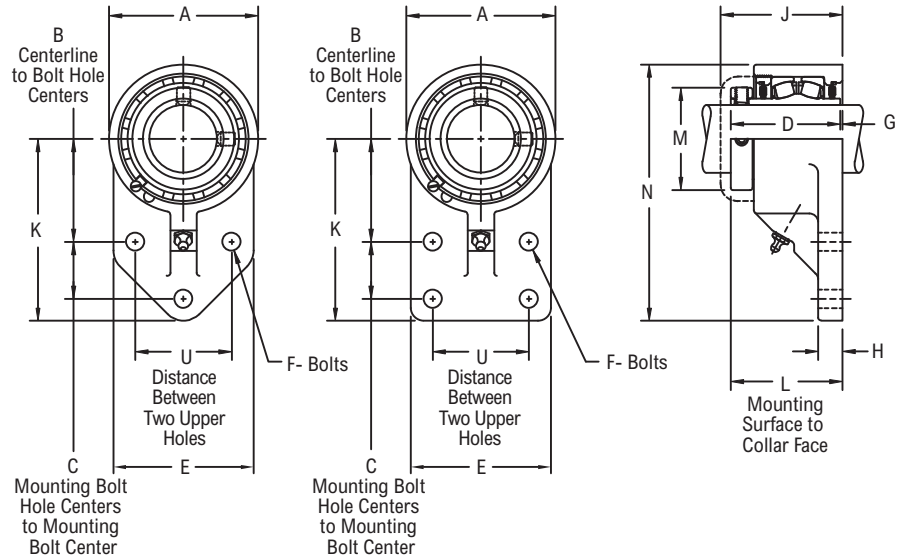

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	B Centerline to Bolt Hole Centers	C Mounting Bolt Hole Centers to Mounting Bolt Center	L Mounting Surface to Collar Face	U Distance Between Two Upper Holes	A	D	E	F	G	H	J	K	M	N	Approx. Weight															
3-Bolt																																
B424	1 ⁷ / ₁₆	FBB22423H	2 ³ / ₈	1 ¹ / ₄	2 ²⁹ / ₃₂	2	3 ⁷ / ₁₆	2 ⁷ / ₈	3 ¹ / ₄	1 ¹ / ₂	1 ¹ / ₃₂	5 ⁵ / ₈	3 ⁵ / ₁₆	4 ¹ / ₄	2 ⁵ / ₁₆	5 ³¹ / ₃₂	6.40															
	1 ¹ / ₂	FBB22424H																														
	35.00	FBB224M35H																60.30	31.80	73.80	50.80	87.30	73.02	82.60	12.00	0.80	15.90	84.10	108.00	58.70	151.60	2.90
B432	1 ¹⁵ / ₁₆	FBB22431H	2 ¹⁵ / ₁₆	1 ⁵ / ₈	3 ³ / ₁₆	2 ³ / ₄	4 ¹ / ₄	3 ¹ / ₈	4	1 ¹ / ₂	1 ¹ / ₁₆	1 ¹¹ / ₁₆	3 ⁹ / ₁₆	5 ³ / ₁₆	2 ⁷ / ₈	7 ⁵ / ₁₆	10.00															
	2	FBB22432H																														
	45.00	FBB224M45H																74.60	41.30	81.00	69.80	108.00	79.38	101.60	12.00	1.60	17.50	90.50	131.80	73.00	185.70	4.40
	50.00	FBB224M50H																													4.30	
4-Bolt																																
B440	2 ⁷ / ₁₆	FBB22439H	3 ³ / ₄	1 ³ / ₄	3 ¹⁹ / ₃₂	3	5 ³ / ₈	3 ¹ / ₂	4 ⁷ / ₈	5 ⁵ / ₈	3 ³ / ₃₂	3 ³ / ₄	3 ³¹ / ₃₂	6 ¹ / ₄	3 ⁹ / ₁₆	8 ¹⁵ / ₁₆	17.50															
	2 ¹ / ₂	FBB22440H																														
	60.00	FBB224M60H																95.20	44.40	91.30	76.20	136.50	88.90	123.80	16.00	2.40	19.00	100.80	158.80	90.50	227.00	8.10
B448	2 ¹¹ / ₁₆	FBB22443H	3 ⁷ / ₈	2 ¹ / ₄	4 ³ / ₃₂	4	6 ¹ / ₄	4	5 ³ / ₄	3 ³ / ₄	3 ³ / ₃₂	7 ⁷ / ₈	4 ⁷ / ₁₆	7	4 ¹ / ₁₆	10 ¹ / ₈	30.00															
	2 ³ / ₄	FBB22444H																														
	2 ¹⁵ / ₁₆	FBB22447H																														
	3	FBB22448H																														
	65.00	FBB224M65H																98.40	57.20	104.00	101.60	158.80	101.60	146.00	20.00	2.40	22.20	112.70	177.80	103.20	257.20	13.70
	70.00	FBB224M70H																														
75.00	FBB224M75H	12.80																														

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size: for size code B424, 1/4 in-28 UNF; for all other size codes, 1/8 in PT
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
- Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


FBB22600



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Bracket Unit with High-Test Iron Housing

Product Features

- Corrosion-resistant powder coating
- High test iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- See Features & Benefits for additional info.

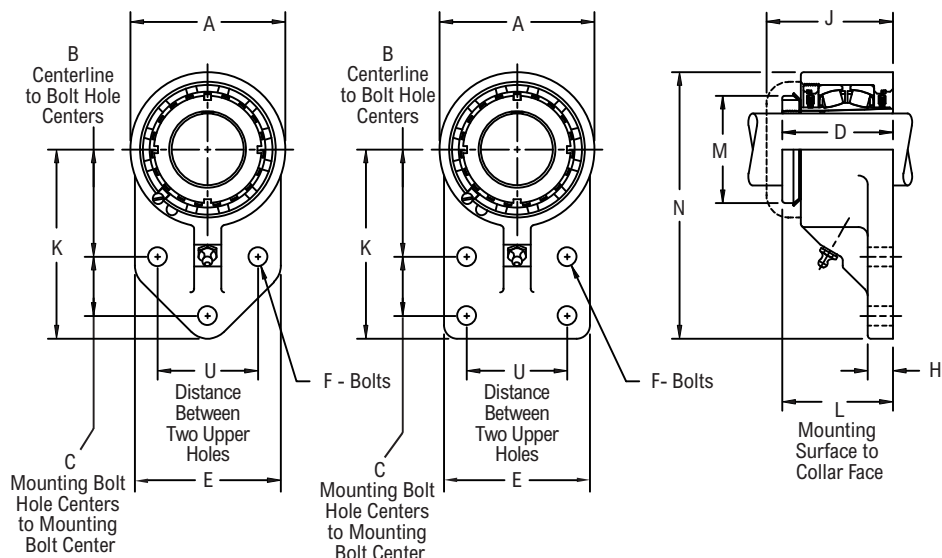

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	B Centerline to Bolt Hole Centers	C Mounting Bolt Hole Centers to Mounting Bolt Center	L Mounting Surface to Collar Face	U Distance Between Two Upper Holes	A	D	E	F	H	J	K	M	N	Approx. Weight
3-Bolt																
B624	1 7/16	FBB22623H	2 3/8	1 1/4	2 3/4	2	3 7/16	2.71	3 1/4	1/2	5/8	3 5/16	4 1/4	2 1/4	5 31/32	6.40
B631	1 15/16	FBB22631H	2 15/16	1 5/8	3 9/64	2 3/4	4 1/4	3.08	4	1/2	11/16	3 9/16	5 3/16	2 31/32	7 5/16	10.00
4-Bolt																
B639	2 7/16	FBB22639H	3 3/4	1 3/4	3 3/8	3	5 3/8	3.16	4 7/8	5/8	3/4	3 31/32	6 1/4	3 5/32	8 15/16	17.50
B647	2 11/16	FBB22643H	3 7/8	2 1/4	3 61/64	4	6 1/4	3.28	5 3/4	3/4	7/8	4 7/16	7	3 5/8	10 1/8	30.00
	2 15/16	FBB22647H														28.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size: for size code B624, 1/4 in-28 UNF; for all other size codes, 1/8 in PT
- Dimensions for "D" & "L" based on unmounted condition
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


FCB22400



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Cartridge Unit

Product Features

- Self aligning type E interchange
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- See Features & Benefits for additional info.

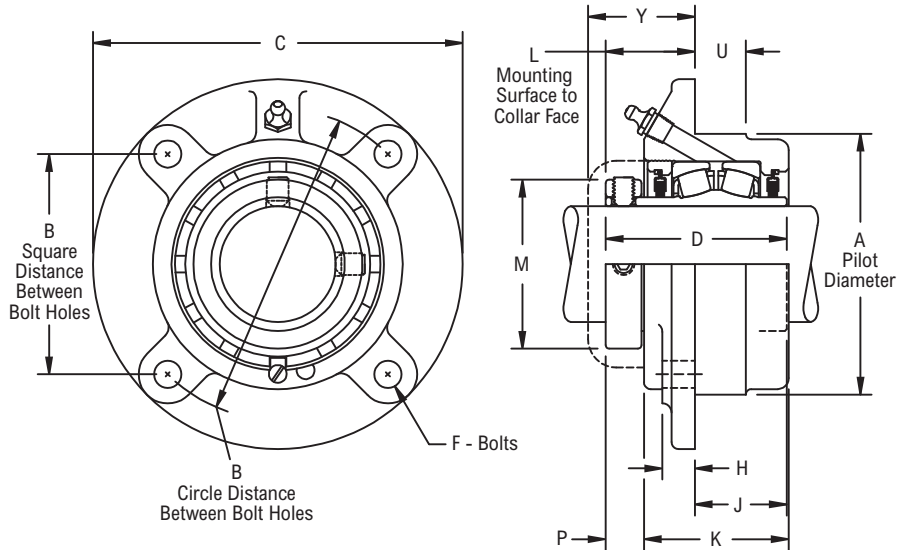

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Pilot Diameter	B Distance Between Bolt Holes		L Mounting Surface to Collar Face	C	D	F Bolts	H	J	K	M	P	U	Y	Approx. Weight
				Square	Circle												
4-Bolt																	
B416	1	FCB22416H	3.000	2 ⁹ / ₁₆	3 ⁵ / ₈	1 ⁹ / ₃₂	4 ³ / ₈	2 ⁹ / ₁₆	⁵ / ₁₆	⁷ / ₁₆	1 ¹ / ₄	2	1 ³ / ₄	¹⁷ / ₃₂	⁵ / ₈	1 ⁵ / ₈	4.00
	25.00	FCB224M25H	76.200	65.10	92.08	32.50	111.10	65.09	8.00	11.10	31.80	50.80	44.40	13.50	15.90	41.30	1.60
B420	1 ³ / ₁₆	FCB22419H	3.375	2 ⁵⁹ / ₆₄	4 ¹ / ₈	1 ⁹ / ₃₂	5	2 ¹¹ / ₁₆	³ / ₈	⁷ / ₁₆	1 ³ / ₈	2 ¹ / ₄	1 ³¹ / ₃₂	¹⁷ / ₃₂	³ / ₄	1 ⁵ / ₈	5.00
	1 ¹ / ₄	FCB22420H															
	30.00	FCB224M30H	85.720	74.20	104.78	32.50	127.00	68.26	10.00	11.10	34.90	57.20	50.00	13.50	19.00	41.30	2.20
B424	1 ⁷ / ₁₆	FCB22423H	3.625	3 ³ / ₃₂	4 ³ / ₈	1 ¹⁵ / ₃₂	5 ¹ / ₄	2 ⁷ / ₈	³ / ₈	¹ / ₂	1 ³ / ₈	2 ³ / ₁₆	2 ⁵ / ₁₆	²¹ / ₃₂	³ / ₄	1 ⁷ / ₈	6.00
	1 ¹ / ₂	FCB22424H															
	35.00	FCB224M35H	92.080	78.60	111.12	37.30	133.40	73.02	10.00	12.70	34.90	55.60	58.70	16.70	19.00	47.60	2.60
B428	1 ⁵ / ₈	FCB22426H	4.250	3 ⁵ / ₈	5 ¹ / ₈	1 ¹⁷ / ₃₂	6 ¹ / ₈	3 ¹ / ₈	⁷ / ₁₆	¹ / ₂	1 ¹⁷ / ₃₂	2 ⁷ / ₁₆	2 ¹⁹ / ₃₂	²¹ / ₃₂	⁷ / ₈	1 ⁷ / ₈	9.00
	1 ¹¹ / ₁₆	FCB22427H															
	1 ³ / ₄	FCB22428H															
	40.00	FCB224M40H	107.950	92.10	130.18	38.90	155.60	79.38	10.00	12.70	38.90	61.90	65.90	16.70	22.20	47.60	3.80
B432	1 ¹⁵ / ₁₆	FCB22431H	4.500	3 ⁵¹ / ₆₄	5 ³ / ₈	1 ¹⁷ / ₃₂	6 ³ / ₈	3 ¹ / ₈	⁷ / ₁₆	⁹ / ₁₆	1 ⁹ / ₁₆	2 ⁷ / ₁₆	2 ⁷ / ₈	²¹ / ₃₂	⁷ / ₈	1 ²⁹ / ₃₂	9.00
	2	FCB22432H															
	45.00	FCB224M45H	114.300	96.40	136.52	38.90	161.90	79.38	10.00	14.30	39.70	61.90	73.00	16.70	22.20	48.40	4.00
	50.00	FCB224M50H															
B436	2 ³ / ₁₆	FCB22435H	5.000	4 ¹ / ₄	6	1 ²¹ / ₃₂	7 ¹ / ₈	3 ⁵ / ₁₆	¹ / ₂	⁹ / ₁₆	1 ⁹ / ₁₆	2 ¹ / ₂	3 ¹ / ₄	²⁵ / ₃₂	1	2 ¹ / ₃₂	12.00
	2 ¹ / ₄	FCB22436H															
	55.00	FCB224M55H	127.000	107.90	152.40	42.10	181.00	84.14	12.00	14.30	39.70	63.50	82.60	19.80	25.40	51.60	5.60
B440	2 ⁷ / ₁₆	FCB22439H	5.500	4 ¹⁹ / ₃₂	6 ¹ / ₂	1 ¹³ / ₁₆	7 ⁵ / ₈	3 ¹ / ₂	¹ / ₂	⁵ / ₈	1 ¹¹ / ₁₆	2 ⁵ / ₈	3 ⁹ / ₁₆	⁷ / ₈	1	2 ⁵ / ₃₂	16.00
	2 ¹ / ₂	FCB22440H															
	60.00	FCB224M60H	139.700	116.70	165.10	46.00	193.70	88.90	12.00	15.90	42.90	66.70	90.50	22.20	25.40	54.80	7.20
B448	2 ¹¹ / ₁₆	FCB22443H	6.375	5 ¹⁹ / ₆₄	7 ¹ / ₂	1 ³¹ / ₃₂	8 ³ / ₄	4	⁵ / ₈	³ / ₄	2	3 ¹ / ₈	4 ¹ / ₁₆	²⁷ / ₃₂	1 ¹ / ₄	2 ⁵ / ₁₆	25.00
	2 ³ / ₄	FCB22444H															
	2 ¹⁵ / ₁₆	FCB22447H															24.00
	3	FCB22448H															
	65.00	FCB224M65H	161.920	134.50	190.50	50.00	222.20	101.60	16.00	19.00	50.80	79.40	103.20	21.40	31.80	58.70	11.60
	70.00	FCB224M70H															
	75.00	FCB224M75H															11.00
B456	3 ³ / ₁₆	FCB22451H	7.375	6 ³ / ₃₂	8 ⁵ / ₈	2 ⁷ / ₁₆	10 ¹ / ₄	4 ³ / ₈	³ / ₄	¹⁵ / ₁₆	2	3 ⁷ / ₁₆	4 ²⁹ / ₃₂	¹⁵ / ₁₆	1 ¹ / ₄	2 ²⁵ / ₃₂	38.00
	3 ⁷ / ₁₆	FCB22455H															
	3 ¹ / ₂	FCB22456H															36.00
	80.00	FCB224M80H	187.320	154.80	219.08	61.90	260.40	111.12	20.00	23.80	50.80	87.30	124.60	23.80	31.80	70.60	17.40
	85.00	FCB224M85H															

Continued...

Continued...

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Pilot Diameter	B Distance Between Bolt Holes		L Mounting Surface to Collar Face	C	D	F Bolts	H	J	K	M	P	U	Y	Approx. Weight
				Square	Circle												
4-Bolt (continued)																	
B464	3 11/16	FCB22459H	8.125	6 5/8	9 3/8	2 21/32	10 7/8	5 3/16	3/4	1 1/8	2 1/2	4 1/8	5 5/8	1 1/32	1 1/2	3 1/16	52.00
	3 15/16	FCB22463H															50.00
	4	FCB22464H															
	90.00	FCB224M90H	206.380	168.30	238.12	67.50	276.20	131.76	20.00	28.60	63.50	104.80	142.90	26.20	38.10	77.80	24.60
	100.00	FCB224M100H															

Additional Notes

Please call 1-866-REXNORD for availability
 Lubrication fitting tap size: for size code B416, 1/4 in-28 UNF; for all other size codes, 1/8 in PT
 Pilot Diameter tolerance, +.000 in/- .002 in (**+0.00 mm/-0.05 mm**)
 Bore tolerance for mounting, +.002 in/- .000 in (**+0.05 mm/-0.00 mm**)
 H labyrinth seals standard
 All size codes available with type E lip seals, except E7 in size code B416

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section


Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Cartridge Unit

Product Features

Self aligning type E interchange
Corrosion-resistant powder coating
Cast iron housing
Misalignment capabilities - total of 4°
Broad range of sealing options
Factory set clearance & lubrication
Enhanced life mounting style
Field interchangeable seals
See Features & Benefits for additional info.

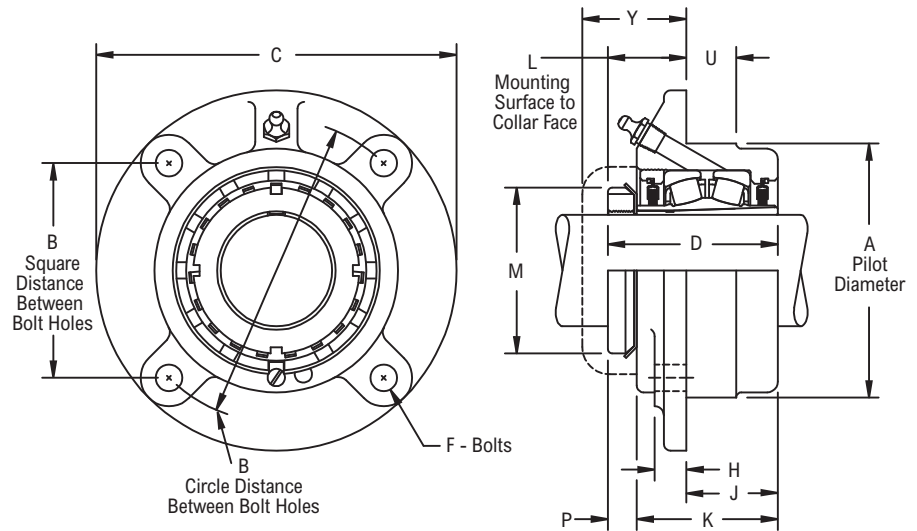

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Pilot Diameter	B Distance Between Bolt Holes		L Mounting Surface to Collar Face	C	D	F Bolts	H	J	K	M	P	U	Y	Approx. Weight
				Square	Circle												
4-Bolt																	
B624	1 ⁷ / ₁₆	FCB22623H	3.625	3 ³ / ₃₂	4 ³ / ₈	1 ¹⁷ / ₆₄	5 ¹ / ₄	2.71	³ / ₈	¹ / ₂	1 ³ / ₈	2 ³ / ₁₆	2 ¹ / ₄	²⁹ / ₆₄	³ / ₄	1 ⁷ / ₈	6.00
B631	1 ¹⁵ / ₁₆	FCB22631H	4.500	3 ⁵¹ / ₆₄	5 ³ / ₈	1 ³¹ / ₆₄	6 ³ / ₈	3.08	⁷ / ₁₆	⁹ / ₁₆	1 ⁹ / ₁₆	2 ⁷ / ₁₆	2 ³¹ / ₃₂	³⁹ / ₆₄	⁷ / ₈	1 ²⁹ / ₃₂	9.00
B635	2 ³ / ₁₆	FCB22635H	5.000	4 ¹ / ₄	6	1 ¹ / ₂	7 ¹ / ₈	3.16	¹ / ₂	⁹ / ₁₆	1 ⁹ / ₁₆	2 ¹ / ₂	3 ⁵ / ₃₂	⁵ / ₈	1	2 ¹ / ₃₂	12.00
B639	2 ⁷ / ₁₆	FCB22639H	5.500	4 ¹⁹ / ₃₂	6 ¹ / ₂	1 ¹⁹ / ₃₂	7 ⁵ / ₈	3.28	¹ / ₂	⁵ / ₈	1 ¹¹ / ₁₆	2 ⁵ / ₈	3 ⁵ / ₈	⁴¹ / ₆₄	1	2 ⁵ / ₃₂	16.00
B647	2 ¹¹ / ₁₆	FCB22643H	6.375	5 ¹⁹ / ₆₄	7 ¹ / ₂	1 ⁵³ / ₆₄	8 ³ / ₄	3.86	⁵ / ₈	³ / ₄	2	3 ¹ / ₈	4 ⁵ / ₃₂	⁴⁵ / ₆₄	1 ¹ / ₄	2 ⁵ / ₁₆	25.00
	2 ¹⁵ / ₁₆	FCB22647H															24.00
B655	3 ⁷ / ₁₆	FCB22655H	7.375	6 ³ / ₃₂	8 ⁵ / ₈	2 ²⁵ / ₆₄	10 ¹ / ₄	4.29	³ / ₄	¹⁵ / ₁₆	2	3 ⁷ / ₁₆	4 ¹⁵ / ₁₆	⁵⁷ / ₆₄	1 ¹ / ₄	2 ²⁵ / ₃₂	37.00
B663	3 ¹⁵ / ₁₆	FCB22663H	8.125	6 ⁵ / ₈	9 ³ / ₈	2 ¹⁷ / ₃₂	10 ⁷ / ₈	4.94	³ / ₄	1 ¹ / ₈	2 ¹ / ₂	4 ¹ / ₈	5 ⁷ / ₁₆	⁵⁹ / ₆₄	2	3 ¹ / ₁₆	50.00

Additional Notes

Please call 1-866-REXNORD for availability
Lubrication fitting tap size, 1/8 in PT
Dimensions for "D", "L" & "P" based on unmounted condition
Pilot Diameter tolerance, +.000 in/- .002 in (**+0.00 mm/-0.05 mm**)
Bore tolerance for mounting, +.002 in/- .000 in (**+0.05 mm/-0.00 mm**)
H labyrinth seals standard
All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


CSEB22400



Photo Shows a Spherical Roller Bearing Cartridge Unit with Steel Housing

Product Features

- Steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- See Features & Benefits for additional info.

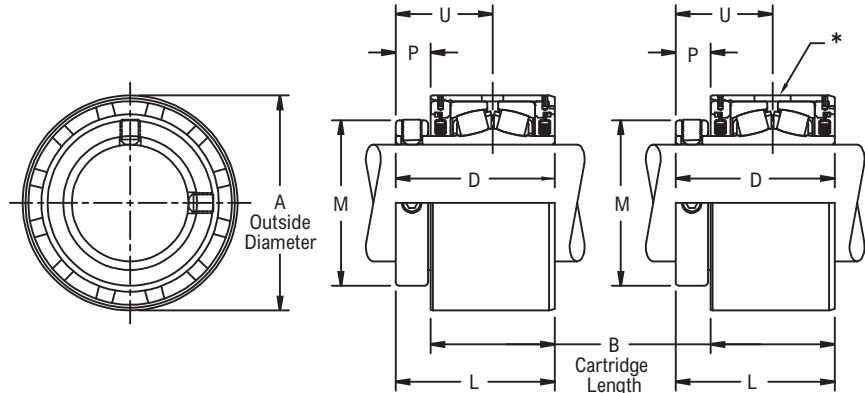

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Outside Diameter	B Cartridge Length	D	L	M	P	U	Approx. Weight
B416	1	CSEB22416H	2.6650	2	2 ⁹ / ₁₆	2 ⁹ / ₁₆	1 ³ / ₄	⁹ / ₁₆	1 ⁹ / ₁₆	3.00
	25.00	CSEB224M25H	67.6900	50.800	65.09	65.10	44.40	14.30	39.70	1.30
B420	1 ³ / ₁₆	CSEB22419H	2.9150	2 ¹ / ₈	2 ¹¹ / ₁₆	2 ¹¹ / ₁₆	1 ³¹ / ₃₂	⁹ / ₁₆	1 ⁵ / ₈	4.00
	1 ¹ / ₄	CSEB22420H								
B424	30.00	CSEB224M30H	74.0400	53.980	68.26	68.30	50.00	14.30	41.30	1.70
	1 ⁷ / ₁₆	CSEB22423H	3.1240	2 ³ / ₁₆	2 ⁷ / ₈	2 ⁷ / ₈	2 ⁵ / ₁₆	¹¹ / ₁₆	1 ²⁵ / ₃₂	4.00
B428	1 ¹ / ₂	CSEB22424H								
	35.00	CSEB224M35H	79.3500	55.560	73.02	73.00	58.70	17.50	45.20	1.80
B432	1 ⁵ / ₈	CSEB22426H	3.6360	2 ⁷ / ₁₆	3 ¹ / ₈	3 ¹ / ₈	2 ¹⁹ / ₃₂	¹¹ / ₁₆	1 ²⁹ / ₃₂	6.00
	1 ¹¹ / ₁₆	CSEB22427H								
B436	1 ³ / ₄	CSEB22428H								
	40.00	CSEB224M40H	92.3500	61.910	79.38	79.40	65.90	17.50	48.40	2.50
B440	1 ¹⁵ / ₁₆	CSEB22431H	3.8330	2 ²⁵ / ₆₄	3 ¹ / ₈	3 ¹ / ₈	2 ⁷ / ₈	²³ / ₃₂	1 ²⁹ / ₃₂	6.00
	2	CSEB22432H								
B444	45.00	CSEB224M45H	97.3600	60.720	79.38	79.40	73.00	18.30	48.40	5.00
	50.00	CSEB224M50H								
B448	2 ³ / ₁₆	CSEB22435H	4.2270	2 ¹ / ₂	3 ⁵ / ₁₆	3 ⁵ / ₁₆	3 ¹ / ₄	¹³ / ₁₆	2 ¹ / ₁₆	7.00
	2 ¹ / ₄	CSEB22436H								
B452	55.00	CSEB224M55H	107.3600	63.500	84.14	84.10	82.60	20.60	52.40	3.20
	2 ¹ / ₄	CSEB224B36H	4.6210	2 ⁵ / ₈	3 ¹ / ₂	3 ¹ / ₂	3 ⁹ / ₁₆	⁷ / ₈	2 ³ / ₁₆	8.00
B456	2 ⁷ / ₁₆	CSEB22439H								
	2 ¹ / ₂	CSEB22440H								
B460	60.00	CSEB224M60H	117.3700	66.680	88.90	88.90	90.50	22.20	55.60	3.90
	2 ¹¹ / ₁₆	CSEB22443H								
B464	2 ³ / ₄	CSEB22444H	5.4070	3 ¹ / ₈	4	4	4 ¹ / ₁₆	⁷ / ₈	2 ⁷ / ₁₆	14.00
	2 ¹⁵ / ₁₆	CSEB22447H								
B468	3	CSEB22448H								
	65.00	CSEB224M65H								
B472	70.00	CSEB224M70H	137.2616	79.380	101.60	101.60	103.20	22.20	61.90	6.60
	75.00	CSEB224M75H								
B476	3 ³ / ₁₆	CSEB22451H								
	3 ⁷ / ₁₆	CSEB22455H	6.1940	3 ⁷ / ₁₆	4 ³ / ₈	4 ³ / ₈	4 ²⁹ / ₃₂	¹⁵ / ₁₆	2 ²¹ / ₃₂	20.00
B480	3 ¹ / ₂	CSEB22456H								
	80.00	CSEB224M80H	157.3300	87.310	111.12	111.10	124.60	23.80	67.50	18.00

Continued...

Continued...

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Outside Diameter	B Cartridge Length	D	L	M	P	U	Approx. Weight
B456	85.00	CSEB224M85H	157.3300	87.310	111.12	111.10	124.60	23.80	67.50	8.60
B464	3 ¹¹ / ₁₆	CSEB22459H	7.3750	4	5 ¹ / ₁₆	5 ¹ / ₁₆	5 ⁵ / ₈	1 ¹ / ₁₆	3 ¹ / ₁₆	33.00
	3 ¹⁵ / ₁₆	CSEB22463H								31.00
	4	CSEB22464H								
	90.00	CSEB224M90H	187.3200	101.600	128.59	128.60	142.90	27.00	77.80	15.90
	100.00	CSEB224M100H								14.10

Additional Notes

Please call 1-866-REXNORD for availability
 O.D. tolerance, +.000 in/-.002 in (**+0.00 mm/-0.05 mm**)
 Bore tolerance for mounting, +.002 in/-.000 in (**+0.05 mm/-0.00 mm**)
 Expansion - is 3/8 in for all size codes
 *Expansion plug diameter .531 in (**13.49 mm**), engagement depth .125 in +/- .015 in (**3.18 mm +/-0.38 mm**)
 Hole for fixed location & slot for expansion location in the same housing
 H labyrinth seals standard

All size codes available with type E lip seals, except E7 in size code B416
 For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
 Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


CSEB22500



Photo Shows a Spherical Roller Bearing Cartridge Unit with Steel Housing

Product Features

- Steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Two hardened spring locking collars
- Field interchangeable seals
- See Features & Benefits for additional info.

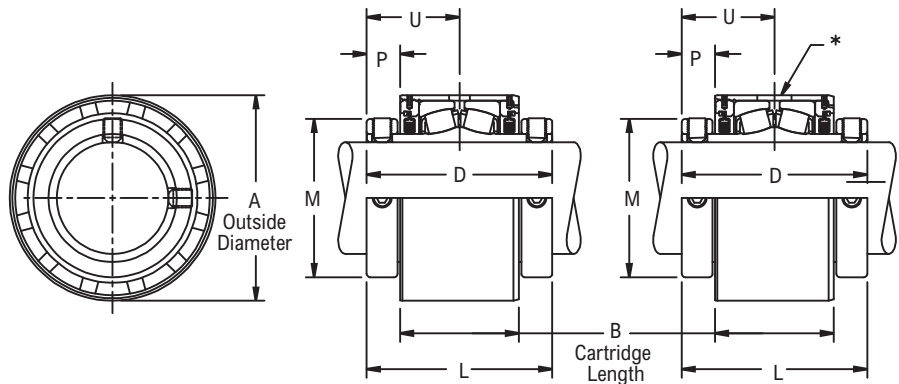

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Outside Diameter	B Cartridge Length	D	L	M	P	U	Approx. Weight
B524	1 ⁷ / ₁₆	CSEB22523H	3.1240	2 ³ / ₁₆	3 ⁹ / ₁₆	3 ⁹ / ₁₆	2 ⁵ / ₁₆	¹¹ / ₁₆	1 ²⁵ / ₃₂	4.20
B528	1 ¹¹ / ₁₆	CSEB22527H	3.6360	2 ⁷ / ₁₆	3 ¹³ / ₁₆	3 ¹³ / ₁₆	2 ¹⁹ / ₃₂	¹¹ / ₁₆	1 ²⁹ / ₃₂	5.60
B531	1 ¹⁵ / ₁₆	CSEB22531H	3.8330	2 ²⁵ / ₆₄	3 ¹³ / ₁₆	3 ¹³ / ₁₆	2 ⁷ / ₈	¹¹ / ₁₆	1 ²⁹ / ₃₂	6.10
B536	2	CSEB22532H	4.2270	2 ¹ / ₂	4 ¹ / ₈	4 ¹ / ₈	3 ¹ / ₄	¹³ / ₁₆	2 ¹ / ₁₆	9.00
	2 ³ / ₁₆	CSEB22535H								
B540	2 ⁷ / ₁₆	CSEB22539H	4.6210	2 ⁵ / ₈	4 ³ / ₈	4 ³ / ₈	3 ⁹ / ₁₆	⁷ / ₈	2 ³ / ₁₆	10.10
B548	2 ¹¹ / ₁₆	CSEB22543H	5.4070	3 ¹ / ₈	4 ⁷ / ₈	4 ⁷ / ₈	4 ¹ / ₁₆	⁷ / ₈	2 ⁷ / ₁₆	16.40
	2 ¹⁵ / ₁₆	CSEB22547H								15.30
B556	3 ⁷ / ₁₆	CSEB22555H	6.1940	3 ⁷ / ₁₆	5 ⁵ / ₁₆	5 ⁵ / ₁₆	4 ²⁹ / ₃₂	¹⁵ / ₁₆	2 ²¹ / ₃₂	21.10
B564	3 ¹⁵ / ₁₆	CSEB22563H	7.3750	4	6 ¹ / ₈	6 ¹ / ₈	5 ⁵ / ₈	1 ¹ / ₁₆	3 ¹ / ₁₆	36.10
	4	CSEB22564H								35.60
B572	4 ³ / ₁₆	CSEB22567YH	7.9670	4 ¹ / ₄	6 ¹ / ₄	6 ¹ / ₄	6 ³ / ₁₆	1	3 ¹ / ₈	52.80
	4 ⁷ / ₁₆	CSEB22571YH								50.60
	4 ¹ / ₂	CSEB22572YH								49.90
	110.00	CSEB225M110YH								22.80
	115.00	CSEB225M115YH	202.36	107.95	158.75	158.75	157.16	25.4	79.37	22.50
B580	4 ¹⁵ / ₁₆	CSEB22579YH	9.3427	5 ⁹ / ₁₆	7 ⁷ / ₈	7 ⁷ / ₈	7 ¹ / ₁₆	1 ⁵ / ₃₂	3 ¹⁵ / ₁₆	55.30
	5	CSEB22580YH								54.70
	125.00	CSEB225M125YH	237.30	141.28	200.02	200.02	174.38	29.37	100.01	24.60

Additional Notes

- Please call 1-866-REXNORD for availability
- O.D. tolerance, for size codes B564 and smaller +.000 in/-.002 in (+0.00 mm/-0.05 mm) for all other size codes +.000 in/-.003 in (+0.00 mm/-0.08 mm)
- Bore tolerance for mounting, +.002 in/-.000 in (+0.05 mm/-0.00 mm)
- Expansion - is 3/8 in for all size codes
- *Expansion plug diameter .531 in (13.49 mm), engagement depth .125 in +/- .015 in (3.18 mm +/- 0.38 mm)
- Hole for fixed location & slot for expansion location in the same housing

- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
- Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


CSEB22600



Photo Shows a Spherical Roller Bearing Cartridge Unit with Steel Housing

Product Features

- Steel housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- See Features & Benefits for additional info.

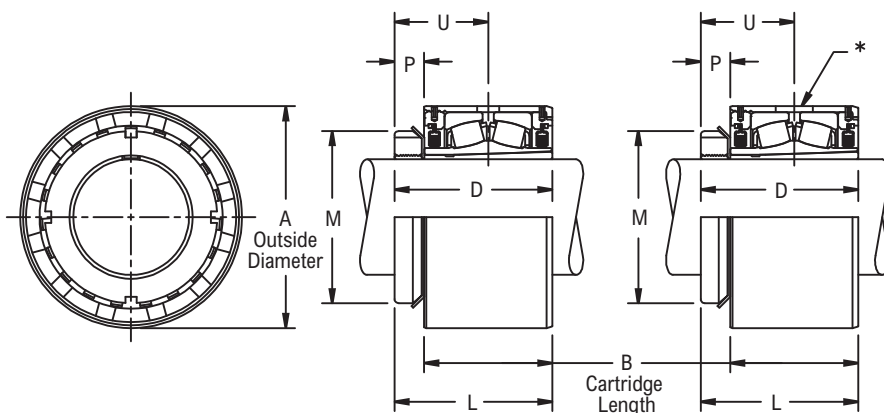

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Outside Diameter	B Cartridge Length	D	L	M	P	U	Approx. Weight
B624	1 ⁷ / ₁₆	CSEB22623H	3.1240	2 ³ / ₁₆	2.71	2 ³ / ₄	2 ¹ / ₄	¹ / ₂	1 ³⁹ / ₆₄	4.00
B631	1 ¹⁵ / ₁₆	CSEB22631H	3.8330	2 ²⁵ / ₆₄	3.08	3 ¹ / ₁₆	2 ³¹ / ₃₂	³⁹ / ₆₄	1 ⁵⁵ / ₆₄	5.00
B635	2 ³ / ₁₆	CSEB22635H	4.2270	2 ¹ / ₂	3.16	3 ⁵ / ₃₂	3 ⁵ / ₃₂	⁵ / ₈	1 ²⁹ / ₃₂	7.00
B639	2 ⁷ / ₁₆	CSEB22639H	4.6210	2 ⁵ / ₈	3.28	3 ¹⁹ / ₆₄	3 ⁵ / ₈	⁴⁵ / ₆₄	1 ³¹ / ₃₂	8.00
B647	2 ¹¹ / ₁₆	CSEB22643H	5.4070	3 ¹ / ₈	3.86	3 ⁷ / ₈	4 ⁵ / ₃₂	⁵⁵ / ₆₄	2 ¹⁹ / ₆₄	14.00
	2 ¹⁵ / ₁₆	CSEB22647H								13.00
B655	3 ⁷ / ₁₆	CSEB22655H	6.1940	3 ⁷ / ₁₆	4.29	4 ⁵ / ₁₆	4 ¹⁵ / ₁₆	⁷ / ₈	2 ³⁷ / ₆₄	18.00
B663	3 ¹⁵ / ₁₆	CSEB22663H	7.3750	4	4.94	4 ¹⁵ / ₁₆	5 ⁷ / ₁₆	¹⁵ / ₁₆	2 ¹⁵ / ₁₆	31.00

Additional Notes

- Please call 1-866-REXNORD for availability
- O.D. tolerance, +.000 in/-.002 in (**+0.00 mm/-0.05 mm**)
- Bore tolerance for mounting, +.002 in/-.000 in (**+0.05 mm/-0.00 mm**)
- Expansion - is 3/8 in for all size codes
- *Expansion plug diameter .531 in (**13.49 mm**), engagement depth .125 in +/- .015 in (**3.18 mm +/-0.38 mm**)
- Hole for fixed location & slot for expansion location in the same housing
- Dimensions for "D", "P" & "U" based on unmounted condition

- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
- Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



CB22400



Photo Shows a Spherical Roller Bearing Cartridge Unit with Cast Iron Housing

Product Features

- Corrosion resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- See Features & Benefits for additional info.

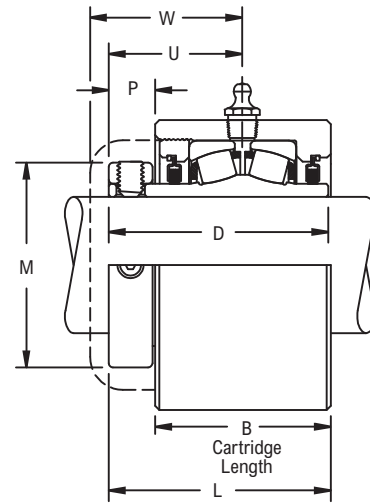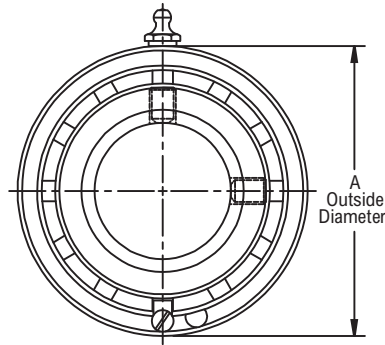

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Outside Diameter	B Cartridge Length	D	L	M	P	U	W	Approx. Weight
B416	1	CB22416H	3.0000	2	2 ⁹ / ₁₆	2 ¹⁹ / ₃₂	1 ³ / ₄	¹⁷ / ₃₂	1 ⁹ / ₁₆	1 ²⁹ / ₃₂	3.00
	25.00	CB224M25H	76.2000	50.800	65.09	65.90	44.40	13.50	39.70	48.40	1.40
B420	1 ³ / ₁₆	CB22419H	3.2190	2 ¹ / ₈	2 ¹¹ / ₁₆	2 ²³ / ₃₂	1 ³¹ / ₃₂	¹⁷ / ₃₂	1 ⁵ / ₈	1 ³¹ / ₃₂	4.00
	1 ¹ / ₄	CB22420H									
B424	30.00	CB224M30H	81.7600	53.980	68.26	69.00	50.00	13.50	41.30	50.00	1.70
	1 ⁷ / ₁₆	CB22423H	3.4370	2 ³ / ₁₆	2 ⁷ / ₈	2 ²⁹ / ₃₂	2 ⁵ / ₁₆	²¹ / ₃₂	1 ²⁵ / ₃₂	2 ³ / ₁₆	4.00
	1 ¹ / ₂	CB22424H									
B428	35.00	CB224M35H	87.3000	55.560	73.02	73.80	58.70	16.70	45.20	55.60	2.10
	1 ⁵ / ₈	CB22426H	3.9370	2 ⁷ / ₁₆	3 ¹ / ₈	3 ⁵ / ₃₂	2 ¹⁹ / ₃₂	²¹ / ₃₂	1 ²⁹ / ₃₂	2 ¹ / ₄	6.00
	1 ¹¹ / ₁₆	CB22427H									
B432	40.00	CB224M40H	100.0000	61.910	79.38	80.20	65.90	16.70	48.40	57.20	2.90
	1 ¹⁵ / ₁₆	CB22431H	4.1250	2 ⁷ / ₁₆	3 ¹ / ₈	3 ⁵ / ₃₂	2 ⁷ / ₈	²¹ / ₃₂	1 ²⁹ / ₃₂	2 ⁹ / ₃₂	6.00
	2	CB22432H									
B436	45.00	CB224M45H	104.7800	61.910	79.38	80.20	73.00	16.70	48.40	57.90	3.10
	50.00	CB224M50H									
B440	55.00	CB224M55H	115.0900	65.090	84.14	84.90	82.60	19.80	52.40	61.90	3.80
	2 ³ / ₁₆	CB22435H	4.5310	2 ⁹ / ₁₆	3 ⁵ / ₁₆	3 ¹¹ / ₃₂	3 ¹ / ₄	²⁵ / ₃₂	2 ¹ / ₁₆	2 ⁷ / ₁₆	8.00
	2 ¹ / ₄	CB22436H									
B448	60.00	CB224M60H	127.0000	66.680	88.90	89.70	90.50	21.40	55.60	65.10	4.80
	2 ⁷ / ₁₆	CB22439H	5.0000	2 ⁵ / ₈	3 ¹ / ₂	3 ¹⁷ / ₃₂	3 ⁹ / ₁₆	²⁷ / ₃₂	2 ³ / ₁₆	2 ⁹ / ₁₆	10.00
	2 ¹ / ₂	CB22440H									
B456	65.00	CB224M65H	149.2200	79.380	101.60	102.40	103.20	21.40	61.90	70.60	8.10
	2 ¹¹ / ₁₆	CB22443H									
B456	70.00	CB224M70H	171.4500	87.310	111.12	111.10	124.60	23.80	67.50	76.20	11.20
	2 ³ / ₄	CB22444H									
B456	75.00	CB224M75H	171.4500	87.310	111.12	111.10	124.60	23.80	67.50	76.20	11.00
	2 ¹⁵ / ₁₆	CB22447H									
B456	3	CB22448H	149.2200	79.380	101.60	102.40	103.20	21.40	61.90	70.60	8.00
	3 ¹ / ₁₆	CB22451H									
B456	3 ³ / ₁₆	CB22455H	6.7500	3 ⁷ / ₁₆	4 ³ / ₈	4 ³ / ₈	4 ²⁹ / ₃₂	¹⁵ / ₁₆	2 ²¹ / ₃₂	3	25.00
	3 ¹ / ₂	CB22456H									
B456	80.00	CB224M80H	171.4500	87.310	111.12	111.10	124.60	23.80	67.50	76.20	11.20
	85.00	CB224M85H									

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8 in PT
- O.D. tolerance, +.000 in/- .002 in (+0.00 mm/-0.05 mm)
- Bore tolerance for mounting, +.002 in/- .000 in (+0.05 mm/-0.00 mm)
- H labyrinth seals standard
- All size codes available with type E lip seals, except E7 in size code B416
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.



CB22600



Photo Shows a Spherical Roller Bearing Cartridge Unit with Cast Iron Housing

Product Features

- Corrosion resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- See Features & Benefits for additional info.

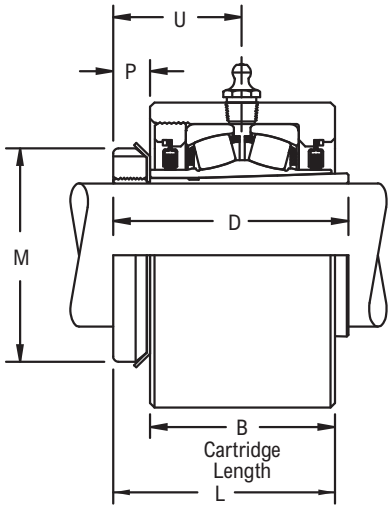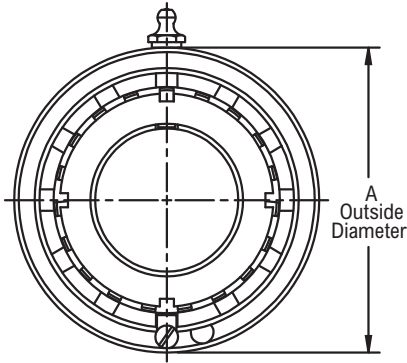

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Outside Diameter	B Cartridge Length	D	L	M	P	U	Approx. Weight
B624	1 7/16	CB22623H	3.4370	2 3/16	2.71	2 13/16	2 1/4	9/16	1 43/64	4.00
B631	1 15/16	CB22631H	4.1250	2 7/16	3.08	3 11/64	2 31/32	43/64	1 55/64	6.00
B635	2 3/16	CB22635H	4.5310	2 9/16	3.16	3 7/32	3 5/32	21/32	1 29/32	8.00
B639	2 7/16	CB22639H	5.0000	2 5/8	3.28	3 25/64	3 5/8	43/64	2 3/64	10.00
B647	2 11/16	CB22643H	5.8750	3 1/8	3.86	4	4 5/32	3/4	2 19/64	18.00
	2 15/16	CB22647H								16.00
B655	3 7/16	CB22655H	6.7500	3 7/16	4.29	4 3/8	4 15/16	7/8	2 9/16	23.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8 in PT
- Dimensions for "D", "P" & "U" based on unmounted condition
- O.D. tolerance, +.000 in/-.002 in (+0.00 mm/-0.05 mm)
- Bore tolerance for mounting, +.002 in/-.000 in (+0.05 mm/-0.00 mm)
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


TB22400



Photo Shows a Spherical Roller Bearing Take-up Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Hardened spring locking collar
- Field interchangeable seals
- See Features & Benefits for additional info.

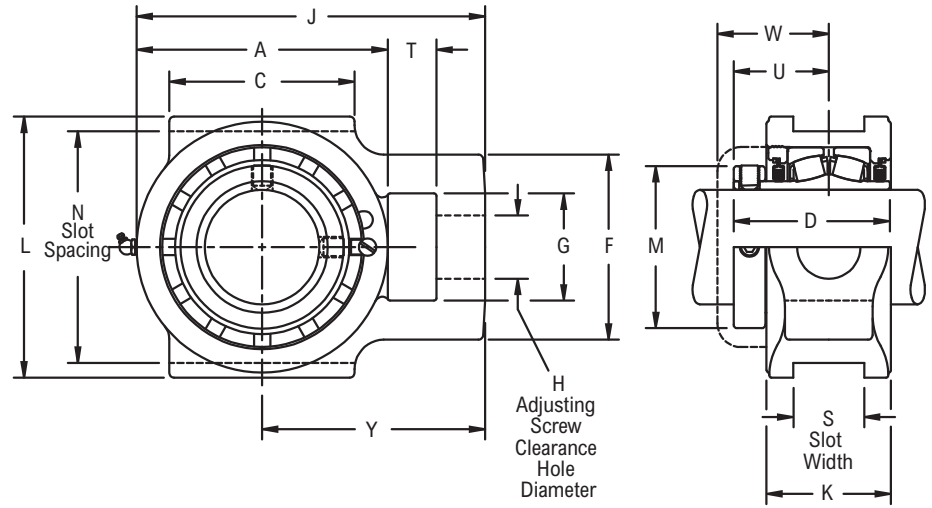

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	H Adjusting Screw Hole Diameter	N Slot Spacing	S Slot Width	A	C	D	F	G	J	K	L	M	T	U	W	Y	Approx. Weight
B416	1	TB22416H	$\frac{3}{4}$	3.000	0.531	3	$2\frac{1}{4}$	$2\frac{3}{16}$	2	$1\frac{1}{4}$	$4\frac{1}{16}$	2	$3\frac{5}{8}$	$1\frac{3}{4}$	$\frac{5}{8}$	$1\frac{9}{16}$	$1\frac{29}{32}$	$2\frac{9}{16}$	4.40
	25.00	TB224M25H	19.10	76.200	13.490	76.20	57.20	65.09	50.80	31.80	103.20	50.80	92.10	44.40	15.90	39.70	48.40	65.10	2.00
B420	$1\frac{3}{16}$	TB22419H	$\frac{7}{8}$	3.500	0.531	$3\frac{3}{8}$	$2\frac{1}{2}$	$2\frac{11}{16}$	$2\frac{5}{16}$	$1\frac{7}{16}$	$4\frac{9}{16}$	$2\frac{1}{8}$	$4\frac{1}{8}$	$1\frac{31}{32}$	$\frac{5}{8}$	$1\frac{5}{8}$	$1\frac{31}{32}$	$2\frac{7}{8}$	5.70
	1 1/4	TB22420H																	5.60
B424	30.00	TB224M30H	22.20	88.900	13.490	85.73	63.50	68.26	58.70	36.50	115.90	53.90	104.80	50.00	15.90	41.30	50.00	73.00	2.60
	$1\frac{7}{16}$	TB22423H	$\frac{7}{8}$	3.500	0.531	$3\frac{3}{4}$	$2\frac{3}{4}$	$2\frac{7}{8}$	$2\frac{3}{8}$	$1\frac{7}{16}$	$5\frac{1}{16}$	$2\frac{3}{16}$	$4\frac{1}{8}$	$2\frac{5}{16}$	$\frac{5}{8}$	$1\frac{25}{32}$	$2\frac{3}{16}$	$3\frac{1}{4}$	6.40
B428	35.00	TB224M35H	22.20	88.900	13.490	95.25	69.80	73.02	60.30	36.50	128.60	55.60	104.80	58.70	15.90	45.20	55.60	82.60	2.90
	$1\frac{1}{2}$	TB22424H																	9.70
B432	$1\frac{5}{8}$	TB22426H	$1\frac{1}{8}$	4.000	0.687	$4\frac{1}{4}$	$3\frac{1}{4}$	$3\frac{1}{8}$	$3\frac{3}{16}$	$1\frac{15}{16}$	$5\frac{15}{16}$	$2\frac{7}{16}$	$4\frac{3}{4}$	$2\frac{19}{32}$	$\frac{3}{4}$	$1\frac{29}{32}$	$2\frac{1}{4}$	$3\frac{13}{16}$	9.50
	$1\frac{11}{16}$	TB22427H																	4.50
B436	$1\frac{3}{4}$	TB22428H																	9.90
	40.00	TB224M40H	28.60	101.600	17.460	107.95	82.60	79.38	81.00	49.20	150.80	61.90	120.60	65.90	19.00	48.40	57.20	96.80	4.50
B440	$1\frac{15}{16}$	TB22431H	$1\frac{1}{8}$	4.000	0.687	$4\frac{1}{2}$	$3\frac{3}{8}$	$3\frac{1}{8}$	$3\frac{3}{16}$	$1\frac{15}{16}$	$6\frac{3}{16}$	$2\frac{7}{16}$	$4\frac{1}{2}$	$2\frac{7}{8}$	$\frac{3}{4}$	$1\frac{29}{32}$	$2\frac{9}{32}$	$3\frac{15}{16}$	9.90
	2	TB22432H																	9.70
B448	45.00	TB224M45H	28.60	101.600	17.460	114.30	85.70	79.38	81.00	49.20	157.20	61.90	114.30	73.00	19.00	48.40	57.90	100.00	4.70
	50.00	TB224M50H																	
B456	$2\frac{3}{16}$	TB22435H	$1\frac{3}{8}$	4.500	0.813	5	$3\frac{3}{4}$	$3\frac{5}{16}$	$3\frac{3}{4}$	$2\frac{1}{4}$	$7\frac{1}{8}$	$2\frac{1}{2}$	$5\frac{1}{4}$	$3\frac{1}{4}$	$1\frac{1}{4}$	$2\frac{1}{16}$	$2\frac{7}{16}$	$4\frac{5}{8}$	14.10
	$2\frac{1}{4}$	TB22436H																	
B464	55.00	TB224M55H	34.90	114.300	20.640	127.00	95.20	84.14	95.20	57.20	181.00	63.50	133.40	82.60	31.80	52.40	61.90	117.50	6.80
	$2\frac{7}{16}$	TB22439H	$1\frac{3}{8}$	5.125	1.063	$5\frac{1}{2}$	4	$3\frac{1}{2}$	$4\frac{1}{8}$	$2\frac{1}{4}$	$7\frac{13}{16}$	$2\frac{5}{8}$	$5\frac{7}{8}$	$3\frac{9}{16}$	$1\frac{1}{4}$	$2\frac{3}{16}$	$2\frac{9}{16}$	$5\frac{1}{16}$	18.00
B472	$2\frac{1}{2}$	TB22440H																	17.80
	60.00	TB224M60H	34.90	130.180	26.990	139.70	101.60	88.90	104.80	57.20	198.40	66.70	149.20	90.50	31.80	55.60	65.10	128.60	8.30
B480	$2\frac{11}{16}$	TB22443H	$1\frac{5}{8}$	5.937	1.812	$6\frac{7}{16}$	$4\frac{3}{4}$	4	$4\frac{3}{4}$	$2\frac{3}{4}$	$9\frac{1}{8}$	$3\frac{1}{8}$	$6\frac{11}{16}$	$4\frac{1}{16}$	$1\frac{1}{2}$	$2\frac{7}{16}$	$2\frac{25}{32}$	$5\frac{15}{16}$	23.60
	$2\frac{3}{4}$	TB22444H																	23.50
B496	$2\frac{15}{16}$	TB22447H																	23.00
	3	TB22448H																	22.90
B512	65.00	TB224M65H	41.30	150.810	46.020	163.50	120.60	101.60	120.60	69.80	231.80	79.40	169.90	103.20	38.10	61.90	70.60	150.80	10.60
	70.00	TB224M70H																	10.30
B528	75.00	TB224M75H																	10.20
	$3\frac{7}{16}$	TB22455H	$1\frac{7}{8}$	6.812	1.812	$7\frac{3}{8}$	$5\frac{1}{2}$	$4\frac{3}{8}$	$4\frac{7}{8}$	$2\frac{7}{8}$	10	$3\frac{7}{16}$	$7\frac{13}{16}$	$4\frac{29}{32}$	$1\frac{5}{8}$	$2\frac{21}{32}$	3	$6\frac{5}{16}$	43.50
B544	$3\frac{1}{2}$	TB22456H																	43.10
	80.00	TB224M80H	47.60	173.020	46.020	187.30	139.70	111.12	123.80	73.00	254.00	87.30	198.40	124.60	41.30	67.50	76.20	160.30	20.50
B560	85.00	TB224M85H																	20.00
	$3\frac{15}{16}$	TB22463H	$2\frac{1}{8}$	8.625	2.062	$8\frac{7}{8}$	7	$5\frac{1}{16}$	$5\frac{1}{4}$	$3\frac{1}{8}$	$12\frac{1}{8}$	$4\frac{1}{8}$	$9\frac{7}{16}$	$5\frac{5}{8}$	$2\frac{1}{8}$	$3\frac{1}{16}$	$3\frac{7}{16}$	$7\frac{11}{16}$	77.00
B576	4	TB22464H																	76.00
	90.00	TB224M90H	53.98	219.080	52.370	225.40	177.80	128.59	133.40	79.40	308.00	104.80	239.70	142.90	54.00	77.80	87.30	195.30	34.90
B592	100.00	TB224M100H																	34.50

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Take-up slot spacing & width tolerance, +.005 in/-.015 in (+0.13 mm/-0.38 mm)
- H labyrinth seals standard
- All size codes available with type E lip seals, except E7 in size code B416
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


TB22600



Photo Shows a Spherical Roller Bearing Take-up Unit

Product Features

- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Enhanced life mounting style
- Field interchangeable seals
- See Features & Benefits for additional info.

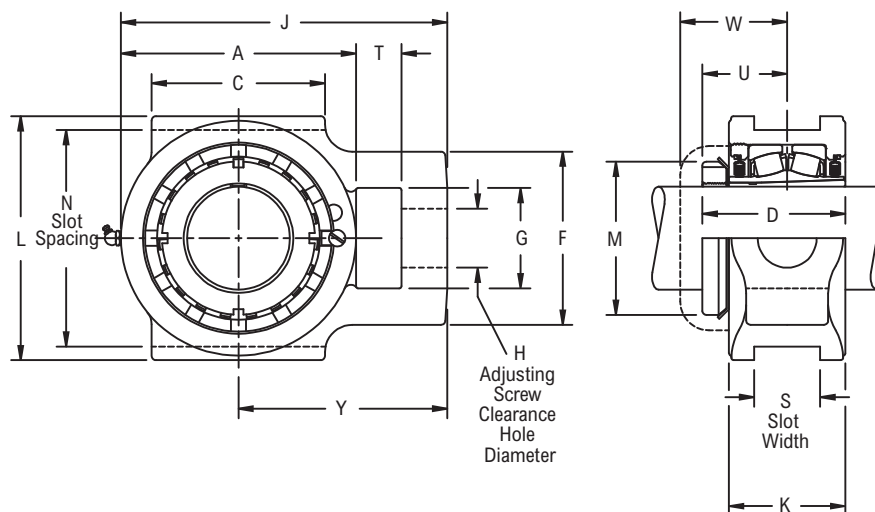

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	H Adjusting Screw Hole Diameter	N Slot Spacing	S Slot Width	A	C	D	F	G	J	K	L	M	T	U	W	Y	Approx. Weight
B624	1 ⁷ / ₁₆	TB22623H	⁷ / ₈	3.500	0.531	3 ³ / ₄	2 ³ / ₄	2.71	2 ³ / ₈	1 ⁷ / ₁₆	5 ¹ / ₁₆	2 ³ / ₁₆	4 ¹ / ₈	2 ¹ / ₄	⁵ / ₈	1 ³⁹ / ₆₄	2 ³ / ₁₆	3 ¹ / ₄	6.40
B631	1 ¹⁵ / ₁₆	TB22631H	1 ¹ / ₈	4.000	0.687	4 ¹ / ₂	3 ³ / ₈	3.08	3 ³ / ₁₆	1 ¹⁵ / ₁₆	6 ³ / ₁₆	2 ⁷ / ₁₆	4 ¹ / ₂	2 ³¹ / ₃₂	³ / ₄	1 ⁵⁵ / ₆₄	2 ⁹ / ₃₂	3 ¹⁵ / ₁₆	9.70
B635	2 ³ / ₁₆	TB22635H	1 ³ / ₈	4.500	0.813	5	3 ³ / ₄	3.16	3 ³ / ₄	2 ¹ / ₄	7 ¹ / ₈	2 ¹ / ₂	5 ¹ / ₄	3 ⁵ / ₃₂	1 ¹ / ₄	1 ²⁹ / ₃₂	2 ⁷ / ₁₆	4 ⁵ / ₈	14.10
B639	2 ⁷ / ₁₆	TB22639H	1 ³ / ₈	5.125	1.063	5 ¹ / ₂	4	3.28	4 ¹ / ₈	2 ¹ / ₄	7 ¹³ / ₁₆	2 ⁵ / ₈	5 ⁷ / ₈	3 ⁵ / ₈	1 ¹ / ₄	1 ³¹ / ₃₂	2 ⁹ / ₁₆	5 ¹ / ₁₆	17.80
B647	2 ¹¹ / ₁₆	TB22643H	1 ⁵ / ₈	5.937	1.812	6 ⁷ / ₁₆	4 ³ / ₄	3.86	4 ³ / ₄	2 ³ / ₄	9 ¹ / ₈	3 ¹ / ₈	6 ¹¹ / ₁₆	4 ⁵ / ₃₂	1 ¹ / ₂	2 ¹⁹ / ₆₄	2 ²⁵ / ₃₂	5 ¹⁵ / ₁₆	13.50
	2 ¹⁵ / ₁₆	TB22647H																	13.00
B655	3 ⁷ / ₁₆	TB22655H	1 ⁷ / ₈	6.812	1.812	7 ³ / ₈	5 ¹ / ₂	4.29	4 ⁷ / ₈	2 ⁷ / ₈	10	3 ⁷ / ₁₆	7 ¹³ / ₁₆	4 ¹⁵ / ₁₆	1 ⁵ / ₈	2 ³⁷ / ₆₄	3	6 ⁵ / ₁₆	43.10
B663	3 ¹⁵ / ₁₆	TB22663H	2 ¹ / ₈	8.625	2.062	8 ⁷ / ₈	7	4.94	5 ¹ / ₄	3 ¹ / ₈	12 ¹ / ₈	4 ¹ / ₈	9 ⁷ / ₁₆	5 ⁷ / ₁₆	2 ¹ / ₈	2 ¹⁵ / ₁₆	3 ⁷ / ₁₆	7 ¹¹ / ₁₆	76.00

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- Dimensions for "D" & "U" based on unmounted condition
- Take-up slot spacing & width tolerance, ±.005 in/-.015 in (**+0.13 mm/-0.38 mm**)
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section



Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.

ETPB22400



Product Features

Cast iron Type E housing
Corrosion resistant powder coating
Misalignment capabilities - Total of 4°
Broad range of sealing options
Factory set clearance & lubrication
Field interchangeable seals
See Features & Benefits for additional info

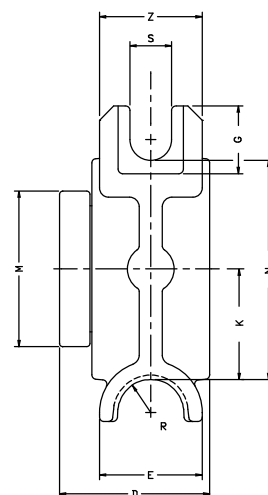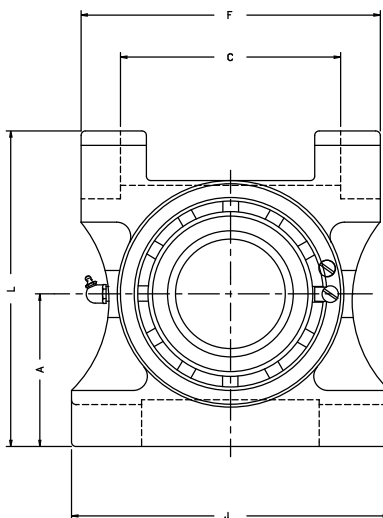

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	A Base to Centerline Height	C	D	E	F	G	J	K	L	M	N	R	S	Z	Approx. Weight
B432	1 ¹⁵ / ₁₆	ETPB22431H	3 ⁷ / ₃₂	4 ¹ / ₂	3 ¹ / ₈	2 ³ / ₈	6	1 ³ / ₈	6 ¹ / ₂	2	6 ⁷ / ₁₆	2 ⁷ / ₈	4	1 ¹³ / ₁₆	1 ¹⁵ / ₁₆	2 ¹³ / ₃₂	15.00
	2	ETPB22432H															
B436	2 ³ / ₁₆	ETPB22435H	3 ¹⁵ / ₃₂	5 ¹ / ₄	3 ⁵ / ₁₆	2 ⁷ / ₁₆	6 ³ / ₄	1 ¹³ / ₃₂	7	2 ¹ / ₄	6 ²⁹ / ₃₂	3 ¹ / ₄	4 ¹ / ₂	1 ¹³ / ₁₆	1 ¹⁵ / ₁₆	2 ⁵ / ₈	15.00
B440	2 ⁷ / ₁₆	ETPB22439H	3 ¹ / ₂	4 ⁷ / ₈	3 ¹ / ₂	2 ³ / ₄	7	1 ²⁵ / ₃₂	7 ¹ / ₂	2 ³ / ₈	7 ³ / ₈	3 ⁹ / ₁₆	4 ¹³ / ₁₆	7 ⁷ / ₈	1 ³ / ₃₂	2 ³ / ₄	21.00
	2 ¹ / ₂	ETPB22440H															
B448	2 ¹⁵ / ₁₆	ETPB22447H	4 ⁵ / ₆₄	5 ⁷ / ₈	4	2 ³ / ₄	8	1 ¹³ / ₁₆	8 ¹ / ₂	2 ³¹ / ₃₂	8 ⁷ / ₁₆	4 ¹ / ₁₆	5 ¹³ / ₁₆	7 ⁷ / ₈	1 ³ / ₃₂	3 ⁵ / ₃₂	29.00
	3	ETPB22448H															
B456	3 ⁷ / ₁₆	ETPB22455H	4 ¹ / ₂	6 ⁷ / ₁₆	4 ³ / ₈	2 ³ / ₄	8 ¹⁵ / ₁₆	2 ³ / ₆₄	9 ³ / ₈	3 ¹ / ₂	9 ¹ / ₂	4 ²⁹ / ₃₂	6 ³ / ₄	7 ⁷ / ₈	1 ³ / ₈	3 ⁷ / ₁₆	41.00
B464	3 ¹⁵ / ₁₆	ETPB22463H	5 ¹ / ₂	8	5 ¹ / ₁₆	3 ¹ / ₈	10 ¹ / ₂	2 ¹ / ₁₆	11	3 ¹⁵ / ₁₆	10 ¹⁵ / ₁₆	5 ⁵ / ₈	7 ²¹ / ₃₂	1 ¹⁵ / ₁₆	1 ³ / ₈	4	68.00

Additional Notes

Please call 1-866-REXNORD for availability
Lubrication fitting tap size, 1/8" PT
H labyrinth seals standard
All size codes available with type E lip seals & E7 triple lip seals
Selection Guide, see Link-Belt Spherical Roller Bearings Selection Guide Section
Load Ratings & Speed Limits, see Link-Belt Spherical Roller Bearings Load Ratings & Speed Limits section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



Photo Shows a Hinged Top, Welded Steel Conveyor Take-up Frame with Spherical Roller Bearing Take-up Unit

Product Features

Protected screw type frame
Corrosion-resistant powder coating
Cast iron housing
Misalignment capabilities - total of 4°
Broad range of sealing options
Factory set clearance & lubrication
Field interchangeable seals
See Features & Benefits for additional info.

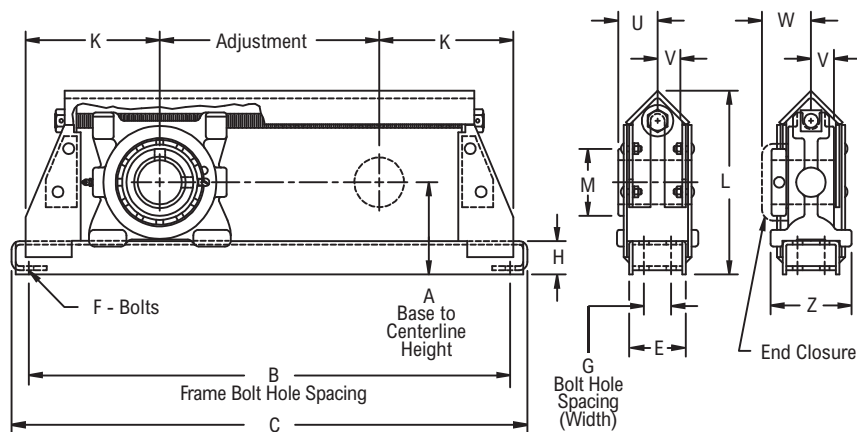

Bearing Dimensions

Size Code	Shaft Diameter	Complete Take-up Assembly	Travel Length	A Base to Centerline Height	B Frame Bolt Hole Spacing	G Bolt Hole Spacing (Width)	C	E	F	H	K	L	M	U	V	W	Z	Adjust.	Approx. Weight
B432	1 15/16	DSB22431H	12 18 24	3 15/16	26 1/2 32 1/2 38 1/2	-	28 1/2 34 1/2 40 1/2	3	5/8	1 3/4	7 1/4	8 1/4	2 7/8	1 29/32	1 1/4	2 9/32	4 1/8	12 18 24	43 49 54
	45.00	DSB224M45H	12 18 24	100.00	673.1 825.5 977.9	-	723.9 876.3 1028.7	76.20	16.00	44.40	184.20	209.60	73.00	48.40	31.80	57.90	104.80	304.8 457.2 609.6	19.5 22.2 24.5
	50.00	DSB224M50H	12 18 24																
B436	2 3/16	DSB22435H	12 18 24	4 3/16	27 1/2 33 1/2 39 1/2	-	29 1/2 35 1/2 41 1/2	3	5/8	1 3/4	7 3/4	8 11/16	3 1/4	2 1/16	1 9/32	2 7/16	4 1/8	12 18 24	49 55 60
	55.00	DSB224M55H	12 18 24	106.40	698.5 850.9 1003.3	-	749.3 901.7 1054.1	76.20	16.00	44.40	196.80	220.70	82.60	52.40	32.50	61.90	104.80	304.8 457.2 609.6	22.2 24.9 27.2
B440	2 7/16	DSB22439H	12 18 24 30	4 3/8	28 1/2 34 1/2 40 1/2 46 1/2	-	30 1/2 36 1/2 42 1/2 48 1/2	3	3/4	1 3/4	8 1/4	9 1/8	3 9/16	2 3/16	1 3/8	2 9/16	4 1/8	12 18 24 30	55 61 66 71
	60.00	DSB224M60H	12 18 24 30	111.10	723.9 876.3 1028.7 1181.1	-	774.7 927.1 1079.5 1231.9	76.20	20.00	44.40	209.60	231.80	90.50	55.60	34.90	65.10	104.80	304.8 457.2 609.6 762.0	24.9 27.2 29.9 32.2
B448	2 15/16	DSB22447H	12 18 24 30	5 1/8	30 1/2 36 1/2 42 1/2 48 1/2	2	32 1/2 38 1/2 44 1/2 50 1/2	4	5/8	2	9 1/4	10 5/8	4 1/16	2 7/16	1 5/8	2 25/32	5 1/8	12 18 24 30	80 89 97 105
	65.00	DSB224M65H	12 18 24 30	130.20	774.4 927.1 1079.5 1231.9	50.80	825.5 977.9 1130.3 1282.7	101.60	16.00	50.80	235.00	269.90	103.20	61.90	41.30	70.60	130.20	304.8 457.2 609.6 762.0	36.3 40.4 44.4 47.6
	70.00	DSB224M70H	12 18 24 30																
B456	3 7/16	DSB22455H	12 18 24 30	5 5/8	32 38 44 50	2	34 1/4 40 1/4 46 1/4 52 1/4	4	3/4	2	10	11 13/16	4 29/32	2 21/32	1 23/32	3	5 5/8	12 18 24 30	107 116 124 132
	80.00	DSB224M80H	12 18 24 30	142.90	812.8 965.2 1117.6 1270.0	50.80	870.0 1022.4 1174.8 1327.2	101.60	20.00	50.80	254.00	300.00	124.60	67.50	43.60	76.20	142.90	304.8 457.2 609.6 762.0	48.5 52.6 56.2 59.9
	85.00	DSB224M85H	12 18 24 30																
B464	3 15/16	DSB22463H	12 18 24 30	7	36 42 48 54	2 1/2	38 1/2 44 1/2 50 1/2 56 1/2	5	3/4	2 1/4	12	14 11/16	5 5/8	3 1/16	2	3 7/16	6 7/8	12 18 24 30	180 192 202 212
	90.00	DSB224M90H	12 18 24 30	177.80	914.4 1066.8 1219.2 1371.6	63.50	977.9 1120.3 1282.7 1435.1	127.00	20.00	57.20	304.80	373.10	142.90	77.80	50.80	87.30	174.60	304.8 457.2 609.6 762.0	81.6 87.1 91.6 96.2
	100.00	DSB224M100H	12 18 24 30																

Additional Notes

Please call 1-866-REXNORD for availability
Lubrication fitting tap size, 1/8" PT
For size code B464, frame has hinged top construction
Frames with 18 in (457.20 mm) adjustment or more have center supporting pad welded to bottom of frame
H labyrinth seals standard
All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


DSHB22500



Photo Shows a Hinged Top, Extra Strength Welded Steel Conveyor Take-up Frame with Spherical Roller Bearing Take-up Unit

Product Features

- Extra strength welded steel frame
- Corrosion-resistant powder coating
- Cast iron housing
- Misalignment capabilities - total of 4°
- Broad range of sealing options
- Factory set clearance & lubrication
- Field interchangeable seals
- See Features & Benefits for additional info.

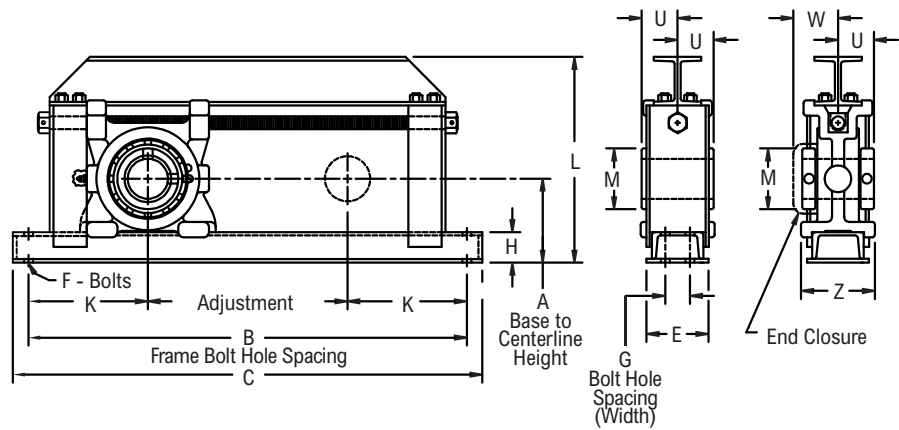

Bearing Dimensions

Size Code	Shaft Diameter	Complete Take-up Assembly	Travel Length	A Base to Centerline Height	B Frame Bolt Hole Spacing	G Bolt Hole Spacing (Width)	C	E	F	H	K	L	M	U	W	Z	Adjust.	Approx. Weight
B531	1 ¹⁵ / ₁₆	DSHB22531H	12 18 24	3 ¹⁵ / ₁₆	27 1/2 33 1/2 39 1/2	-	29 1/2 35 1/2 41 1/2	3 1/2	5/8	1 3/4	7 3/4	10 5/8	2 7/8	1 29/32	2 9/32	4 1/8	12 18 24	78 88 98
B536	2 ³ / ₁₆	DSHB22535H	12 18 24	4 ⁷ / ₁₆	27 1/2 33 1/2 39 1/2	-	29 1/2 35 1/2 41 1/2	4 1/2	5/8	2	7 3/4	11 1/4	3 1/4	2 1/16	2 7/16	5 1/4	12 18 24	83 93 103
B540	2 ⁷ / ₁₆	DSHB22539H	12 18 24	4 ⁵ / ₈	28 1/2 34 1/2 40 1/2	-	30 1/2 36 1/2 42 1/2	4 1/2	3/4	2	8 1/4	12 13/16	3 9/16	2 3/16	2 9/16	5 1/4	12 18 24	105 118 132
B548	2 ¹⁵ / ₁₆	DSHB22547H	12 18 24 30 36	5 1/8	30 1/2 36 1/2 42 1/2 48 1/2 54 1/2	2	32 1/2 38 1/2 44 1/2 50 1/2 56 1/2	4 1/2	5/8	2	9 1/4	13 15/16	4 1/16	2 7/16	2 25/32	5 1/4	12 18 24 30 36	125 140 155 170 185
B556	3 ⁷ / ₁₆	DSHB22555H	12 18 24 30 36	5 ⁵ / ₈	32 38 44 50 56	2	34 1/4 40 1/4 46 1/4 52 1/4 58 1/4	4 1/2	3/4	2	10	15 1/16	4 29/32	2 21/32	3	5 5/8	12 18 24 30 36	146 162 178 194 210
B564	3 ¹⁵ / ₁₆	DSHB22563H	12 18 24 30 36	7	36 42 48 54 60	2 1/2	38 1/2 44 1/2 50 1/2 56 1/2 62 1/2	5 1/2	3/4	2 1/4	12	17 1/16	5 5/8	3 1/16	3 7/16	6 7/8	12 18 24 30 36	260 278 296 314 332

Additional Notes

- Please call 1-866-REXNORD for availability
- Lubrication fitting tap size, 1/8" PT
- H labyrinth seals standard
- All size codes available with type E lip seals & E7 triple lip seals
- For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section
- Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.


LHD FRAME



Photo Shows a Protected Screw Type Frame

Product Features

Protected screw type frame
Welded steel frame

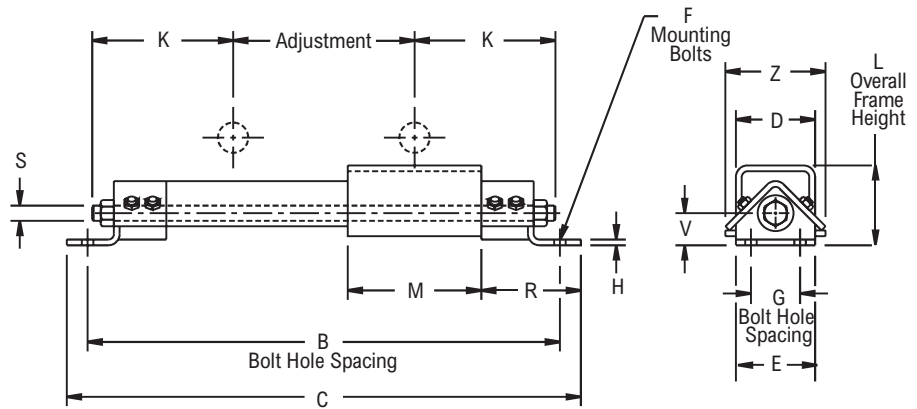

Bearing Dimensions

Size Code	Available Shaft Sizes			Part Number	Adjustment Length	B Bolt Hole Spacing	G Bolt Hole Spacing in Width Direction	L Overall Frame Height	C	D	E	F	H	K	M	R	S	V	Z	Approx. Weight
	PB/PKB 22400/22600 Series	PB22500 Series	EPB22400/22500/22600 Series																	
LHD20	$1 \frac{3}{16}$ - $2 \frac{1}{2}$	$1 \frac{7}{16}$ - $2 \frac{7}{16}$	$1 \frac{7}{16}$ - $2 \frac{1}{2}$	LHD2012	12	29	$2 \frac{1}{2}$	$5 \frac{1}{4}$	31	4	5	$\frac{5}{8}$	$\frac{1}{4}$	$8 \frac{1}{2}$	11	4	$\frac{3}{4}$	2	$6 \frac{1}{4}$	48.00
				LHD2018	18	35			37											52.00
				LHD2024	24	41			43											56.00
				LHD2030	30	47			49											65.00
				LHD2036	36	53			55											70.00
				LHD2048	48	65			67											81.00
LHD25	$2 \frac{11}{16}$ -3	$2 \frac{11}{16}$ - $2 \frac{15}{16}$	$2 \frac{11}{16}$ -3	LHD2512	12	$32 \frac{3}{4}$	3	$6 \frac{1}{4}$	$35 \frac{1}{4}$	5	$5 \frac{1}{2}$	$\frac{5}{8}$	$\frac{3}{8}$	$10 \frac{3}{8}$	$13 \frac{1}{4}$	5	1	$2 \frac{9}{16}$	$7 \frac{1}{8}$	81.00
				LHD2518	18	$38 \frac{3}{4}$			$41 \frac{1}{4}$											100.00
				LHD2524	24	$44 \frac{3}{4}$			$47 \frac{1}{4}$											110.00
				LHD2530	30	$50 \frac{3}{4}$			$53 \frac{1}{4}$											115.00
				LHD2536	36	$56 \frac{3}{4}$			$59 \frac{1}{4}$											120.00
				LHD2548	48	$68 \frac{3}{4}$			$71 \frac{1}{4}$											127.00
LHD30	$3 \frac{3}{16}$ - $3 \frac{1}{2}$	$3 \frac{7}{16}$	-	LHD3012	12	$35 \frac{1}{2}$	3	7	$38 \frac{1}{4}$	6	$6 \frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{2}$	$11 \frac{3}{4}$	$14 \frac{1}{4}$	6	1	$2 \frac{1}{2}$	9	158.00
				LHD3018	18	$41 \frac{1}{2}$			$44 \frac{1}{4}$											162.00
				LHD3024	24	$47 \frac{1}{2}$			$50 \frac{1}{4}$											166.00
				LHD3030	30	$53 \frac{1}{2}$			$56 \frac{1}{4}$											173.00
				LHD3036	36	$59 \frac{1}{2}$			$62 \frac{1}{4}$											183.00
				LHD3048	48	$71 \frac{1}{2}$			$74 \frac{1}{4}$											214.00
LHD35	$3 \frac{11}{16}$ -4	$3 \frac{15}{16}$ - $4 \frac{1}{2}$	$3 \frac{3}{16}$ - $3 \frac{1}{2}$	LHD3512	12	$37 \frac{1}{4}$	3	7	40	6	$6 \frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{2}$	$12 \frac{5}{8}$	16	6	$1 \frac{1}{4}$	$2 \frac{1}{2}$	9	173.00
				LHD3518	18	$43 \frac{1}{4}$			46											190.00
				LHD3524	24	$49 \frac{1}{4}$			52											195.00
				LHD3530	30	$55 \frac{1}{4}$			58											200.00
				LHD3536	36	$61 \frac{1}{4}$			64											210.00
				LHD3548	48	$73 \frac{1}{4}$			76											234.00
LHD40	-	$4 \frac{15}{16}$ -5	-	LHD4012	12	$41 \frac{1}{4}$	3	7	44	7	$6 \frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{2}$	$14 \frac{5}{8}$	20	6	$1 \frac{1}{2}$	$2 \frac{1}{2}$	$9 \frac{13}{16}$	175.00
				LHD4018	18	$47 \frac{1}{4}$			50											220.00
				LHD4024	24	$53 \frac{1}{4}$			56											265.00
				LHD4030	30	$59 \frac{1}{4}$			62											270.00
				LHD4036	36	$65 \frac{1}{4}$			68											290.00
				LHD4048	48	$77 \frac{1}{4}$			80											300.00
LHD50	-	-	-	LHD5012	12	47	4	$7 \frac{3}{4}$	$49 \frac{1}{2}$	$8 \frac{1}{2}$	7	$\frac{7}{8}$	$\frac{1}{2}$	$17 \frac{1}{2}$	$23 \frac{1}{2}$	$6 \frac{3}{4}$	$1 \frac{1}{2}$	$3 \frac{3}{8}$	$11 \frac{1}{4}$	290.00
				LHD5018	18	53			$55 \frac{1}{2}$											300.00
				LHD5024	24	59			$61 \frac{1}{2}$											325.00
				LHD5030	30	65			$67 \frac{1}{2}$											330.00
				LHD5036	36	71			$73 \frac{1}{2}$											350.00
				LHD5048	48	83			$85 \frac{1}{2}$											360.00

Additional Notes

Please call 1-866-REXNORD for availability

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.