

Wilkerson Modular Coalescing Filters


2014
NEW



- removes extremely fine oil mists, oil aerosols and microscopic particles
- A standard airline filter should be installed as a pre-filter when using a coalescing filter.
- 0.5 micron type B and 0.003 micron type D elements are optional
- differential pressure indicator changes from green to red with pressure loss

Features:

- high-efficiency removal of water, oil aerosols, and solid particulate contaminants down to 0.01 mg/m³ with minimum pressure drop
- modern design and appearance
- light weight
- high flow capacity
- 6 oz. bowl
- maximum operating conditions:
150 PSIG (10.3 bar) and 32°F to 125°F (0°C to 52°C)

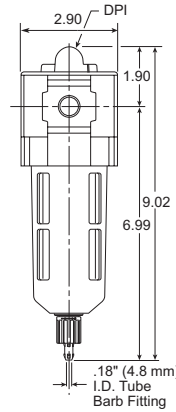


with guard

F

Size	Flow (SCFM)	With Standard Transparent Bowl and Guard			
		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
3/8"	82.0	M28-03A	\$279.30	M28-03M	\$222.55
1/2"	90.0	M28-04A	279.30	M28-04M	222.55
3/4"	98.0	M28-06A	279.30	M28-06M	222.55

Features:

- 0.01 micron type C element
- 1 qt. bowl
- maximum operating conditions:
150 PSIG (10.3 bar) and 32°F to 125°F (0°C to 52°C)



with guard

Size	Flow (SCFM)	With Jumbo Transparent Bowl and Guard	
		Part #	Price/E
1/2"	123	M30-04A	\$600.90
3/4"	173	M30-06A	600.90
1"	203	M30-08A	600.90

See pages 226-229 for filter accessories.

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.