


Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports
Curves & tracks	Side guide solutions	Miscellaneous products	Related information

11530a

www.SystemPlastSmartGuide.com



1706 - 1700 - 1702 - 1701 TAB

Multiflex chains

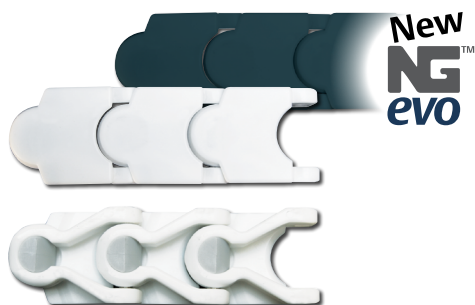

NG^{evo}

Longest life
Lowest friction
Good chemical resistance
High abrasion resistance
Approved for direct food contact
Less dust than with acetal chains
More.....

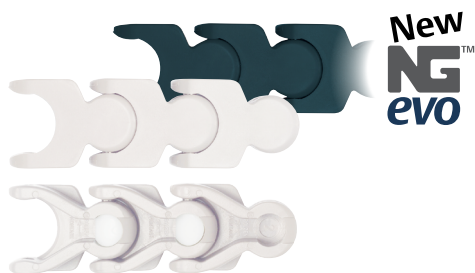

Pin Material:
Austenitic Stainless Steel


11560a



50170a




11550a

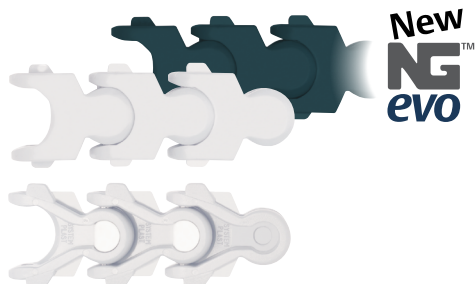

Pin Material:

Austenitic Stainless Steel

1701 TAB and have identical dimensions as 1700 series but include TAB configuration to hold down chains especially in curves.

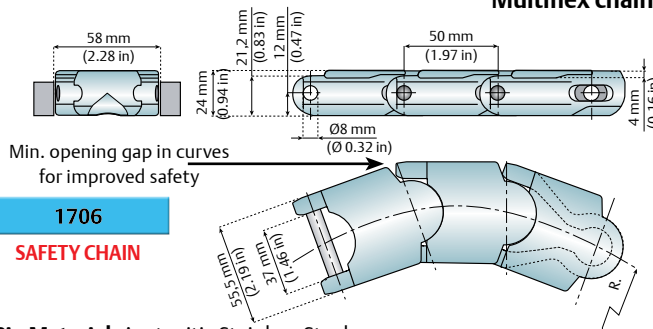


1706

SAFETY CHAIN

Pin Material: Austenitic Stainless Steel


Item description	Material Link	Breaking load		R min.		Weight	
		N	lbs	mm	in	Kg/m	lbs/ft.
NGE1706	NGE Grey Blue	7200	1600	125	4.9	1,3	0.9
LFW1706	LFW White	8000	1800	125	4.9	1,3	0.9

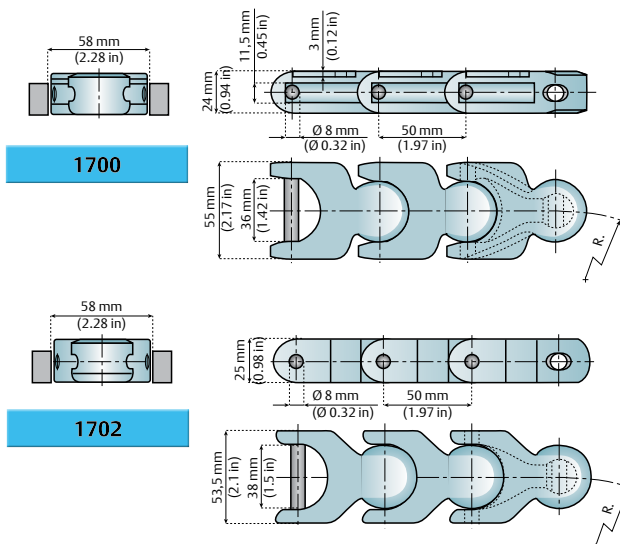

1700

1702

Item description	Material Link	Breaking load		R min.		Weight	
		N	lbs	mm	in	Kg/m	lbs/ft.
NGE1700	NGE Grey Blue	7700	1700	150	5.9	1,3	0.9
LF1700	LF Brown	8500	1900	150	5.9	1,3	0.9
LFG1700	LFG Grey	8500	1900	150	5.9	1,3	0.9
LFW1700	LFW White	8500	1900	150	5.9	1,3	0.9
W1700	W White	8500	1900	150	5.9	1,3	0.9
NGE1702	NGE Grey Blue	8600	1900	150	5.9	1,4	0.9
LF1702	LF Brown	9500	2100	150	5.9	1,4	0.9
LFG1702	LFG Grey	9500	2100	150	5.9	1,4	0.9
LFW1702	LFW White	9500	2100	150	5.9	1,4	0.9

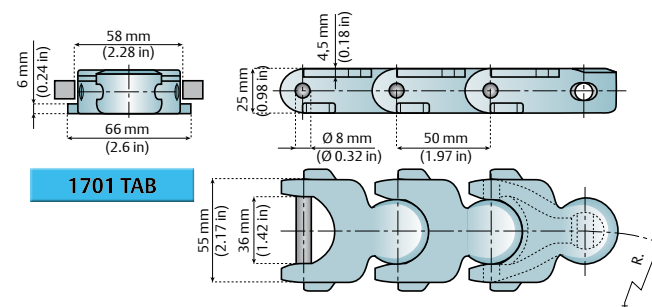

1701 TAB

Item description	Material Link	Breaking load		R min.		Weight	
		N	lbs	mm	in	Kg/m	lbs/ft.
NGE1701-TAB	NGE Grey Blue	8600	1900	150	5.9	1,4	0.9
LF1701-TAB	LF Brown	9500	2100	150	5.9	1,4	0.9
LFW1701-TAB	LFW White	9500	2100	150	5.9	1,4	0.9

Standard length: 61 pitches (10 ft. - 3,050 m)