

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports
Curves & tracks	Side guide solutions	Miscellaneous products	Related information

11220a




www.SystemPlastSmartGuide.com

879M - 880M

Sideflexing chains for magnetic system



Click here for related information.

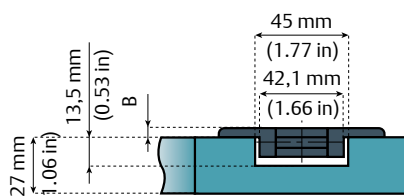

Nolu®-S curves

are strongly recommended with these chains!

NG^{evo}

Longest life
Lowest friction
Good chemical resistance
High abrasion resistance
Approved for direct food contact
Less dust than with acetal chains
More.....

Item description	Material plate	Breaking load		Width L		B Thickness		R min.		Weight	
		N	lbs	mm	in	mm	in	mm	in	Kg/m	lbs/ft.
NGE880M-K325	NGE Grey Blue	5100	1150	82,5	3 ¼	4	0.16	500	19.7	1,1	0.7
NGE880M-K330				83,8	3 19/64					1,1	0.7
NGE880M-K450				114,3	4 ½					1,2	0.8
NGE880M-K750				190,5	7 ½					1,5	1.0
LF880M-K325	LF Brown	5700	1280	82,5	3 ¼	4	0.16	500	19.7	1,1	0.7
LF880M-K330				83,8	3 19/64					1,1	0.7
LF880M-K450				114,3	4 ½					1,2	0.8
LF880M-K750				190,5	7 ½					1,5	1.0
NGE879M-K325	NGE Grey Blue	5100	1150	82,5	3 ¼	4,8	0.19	500	19.7	1,2	0.8
NGE879M-K450				114,3	4 ½					1,3	0.8
LF879M-K325	LF Brown	5700	1280	82,5	3 ½	4,8	0.19	500	19.7	1,2	0.8
LF879M-K450				114,3	4 ½					1,3	0.8

Standard length: 80 pitches (10 ft. - 3,05 m)

Breaking load according to standard ISO 4348 - DIN 8153

See also:



11260b



11260a



50010a



Information about this product is only available on our Smart Guide™ website.

Other versions 879 M:

VG Rubber top

LBP (low pressure)

