

<b>Chains &amp; sprockets</b>	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports
Curves & tracks	Side guide solutions	Miscellaneous products	Related information

## 11280a



## 882M

www.SystemPlastSmartGuide.com

### Sideflexing chains for magnetic system



Click here for related information.

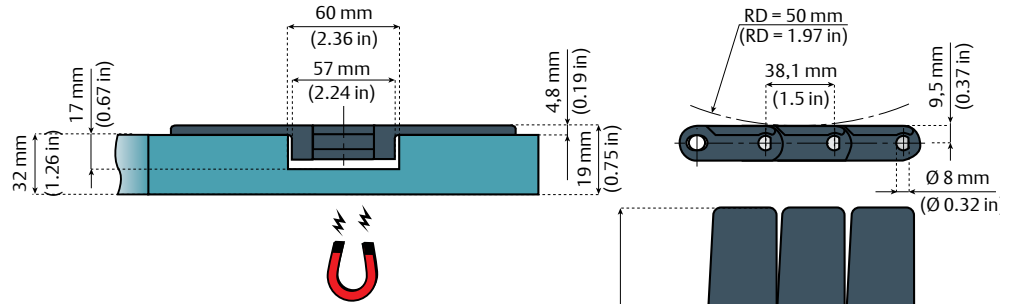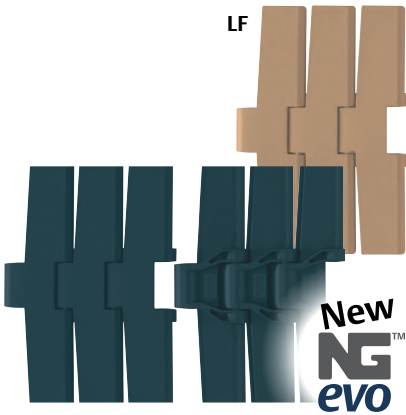

**Nolu®-S curves**  
are strongly recommended  
with these chains!

- NGevo**  
 Longest life  
 Lowest friction  
 Good chemical resistance  
 High abrasion resistance  
 Approved for direct food contact  
 Less dust than with acetal chains  
 More.....

## 11300a

## 50060a

Item description	Material plate	Breaking load		Width L		R min.		Weight	
		N	lbs	mm	in	mm	in	Kg/m	lbs/ft.
NGE882M-K750	NGE Grey Blue	9000	2020	190,5	7 ½	610	24	2,2	1.4
NGE882M-K1000				254,0	10			2,5	1.6
NGE882M-K1200				304,8	12			2,7	1.8
LF882M-K750	LF Brown	10000	2250	190,5	7 ½	610	24	2,2	1.4
LF882M-K1000				254,0	10			2,5	1.6
LF882M-K1200				304,8	12			2,7	1.8

Standard length: 80 pitches (10 ft. - 3,05 m)

Breaking load according to standard ISO 4348 - DIN 8153

Other versions 882 M:

<b>VG</b> Rubber top	<b>LBP</b> (low pressure)