

BALDOR® • RELIANCE

Product Information Packet

PL3519M

3HP,3450RPM,1PH,60HZ,56,3532LC,TEFC,F1

Part Detail							
Revision:	X	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3532LC	Elec. Spec:	35WGY870	CD Diagram:	CD0002A02
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	35T949	Layout:	35LYT949
Frame:	56	Mounting:	F1	Poles:	02	Created Date:	06-22-2007
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	03-08-2013
Leads:	2#14 A PH,3#18 B&J					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1257L									
CAT.NO.	PL3519M								
SPEC.	35T949Y870G1								
HP	3								
VOLTS	230								
AMP	12.5								
RPM	3450								
FRAME	56	HZ			60	PH		1	
SER.F.	1.15	CODE			G	DES		L	CL F
NEMA-NOM-EFF	85.5	PF			95				
RATING	40C AMB-CONT								
CC		USABLE AT 208V			13.7				
DE	6205	ODE			6203				
ENCL	TEFC	SN							

Parts List		
Part Number	Description	Quantity
SA111036	SA 35T949Y870G1	1.000 EA
RA102415	RA 35T949Y870G1	1.000 EA
OC3035F09SP	CYL OIL CAP 35MFD/370V	1.000 EA
TPBRT44DB	THERMAL 1PH 1.25 MAN 120C	1.000 EA
EC1216C06SP	ELEC CAP, 216-259 MFD, 250V, 2.06D X 4.	1.000 EA
WD3006A01	RSS-2-103JT 2W 10K RES. METAL OXIDE 5%	1.000 EA
TP5059	GENERIC THERMAL KIT	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3006A68	35 CB .50 NPT @ 6:00, 1.25 MTO @ 3:00	1.000 EA
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3100M02	FREP TEFC 203 BRG W/O GRSR (RAISED FH MT	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
35CB3801SP	CAPACITOR COVER, CAST	1.000 EA
NS2501A02	INSULATOR, CAPACITOR BOX	1.000 EA
34GS3002	GASKET, CAPACITOR BOX	1.000 EA
HA7010	CAPACITOR RETENTION CLAMP	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3101A02SP	STD PU ENDPLATE-ENCL-205 BRG LESS GREASE	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
35FH4005A32SP	IEC FH NO GRSR W/3 HOLES - W/AUTOPHERETI	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 EA
35GS1030	35 GS FOR CB LID - LEXIDE	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
WD1000A15	3-520132-2 AMP FLAG (4M/RL NON-CANC/NON-	4.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
MG1000G27	MED CHARCOAL METALLIC GREY	0.017 GA
LB1087	LABEL,MANUAL RESET (ROLL LABEL)	1.000 EA
HA3100A22	THRUBOLT 10-32 X 10.125	4.000 EA
SP5181A28	MODEL 35 LC TORQ STAT SWITCH LEAD ASSY	1.000 EA
LB1119N	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0002	CONNECTION LABEL	1.000 EA
NP1257L	ALUM UL CSA CC THERMAL REV MTG	1.000 EA
35PA1066	PACKING GROUP COMBINED PRINT	1.000 EA
LB1506	LABEL "AMERICAN MADE" 1.50 X 1.00	1.000 EA

Accessories		
Part Number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 10351 - Typical performance - not guaranteed values


Winding: 35WGY870-R001	Type: 3532LC	Enclosure: TEFC
-------------------------------	---------------------	------------------------

Nameplate Data				230 V, 60 Hz: Single Voltage Motor	
Rated Output (HP)	3			Full Load Torque	4.6 LB-FT
Volts	230			Start Configuration	direct on line
Full Load Amps	12.5			Breakdown Torque	11.5 LB-FT
R.P.M.	3450			Pull-up Torque	9.3 LB-FT
Hz	60	Phase	1	Locked-rotor Torque	10.5 LB-FT
NEMA Design Code	L	KVA Code	G	Starting Current	77 A
Service Factor (S.F.)	1.15			No-load Current	2.6 A
NEMA Nom. Eff.	85.5	Power Factor	95	Line-line Res. @ 25°C	3.06 Ω A Ph 1.45 Ω B Ph
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	47°C
S.F. Amps				Temp. Rise @ S.F. Load	56°C

Load Characteristics 230 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	76	87	92	92	93	92	93
Efficiency	72	80	85	85.5	82	78.5	85
Speed	3565	3540	3510	3475	3430	3370	3455
Line amperes	4.6	7.2	9.6	12.5	16	19.9	14.4

Performance Graph at 230V, 60Hz, 3.0HP Typical performance - Not guaranteed values

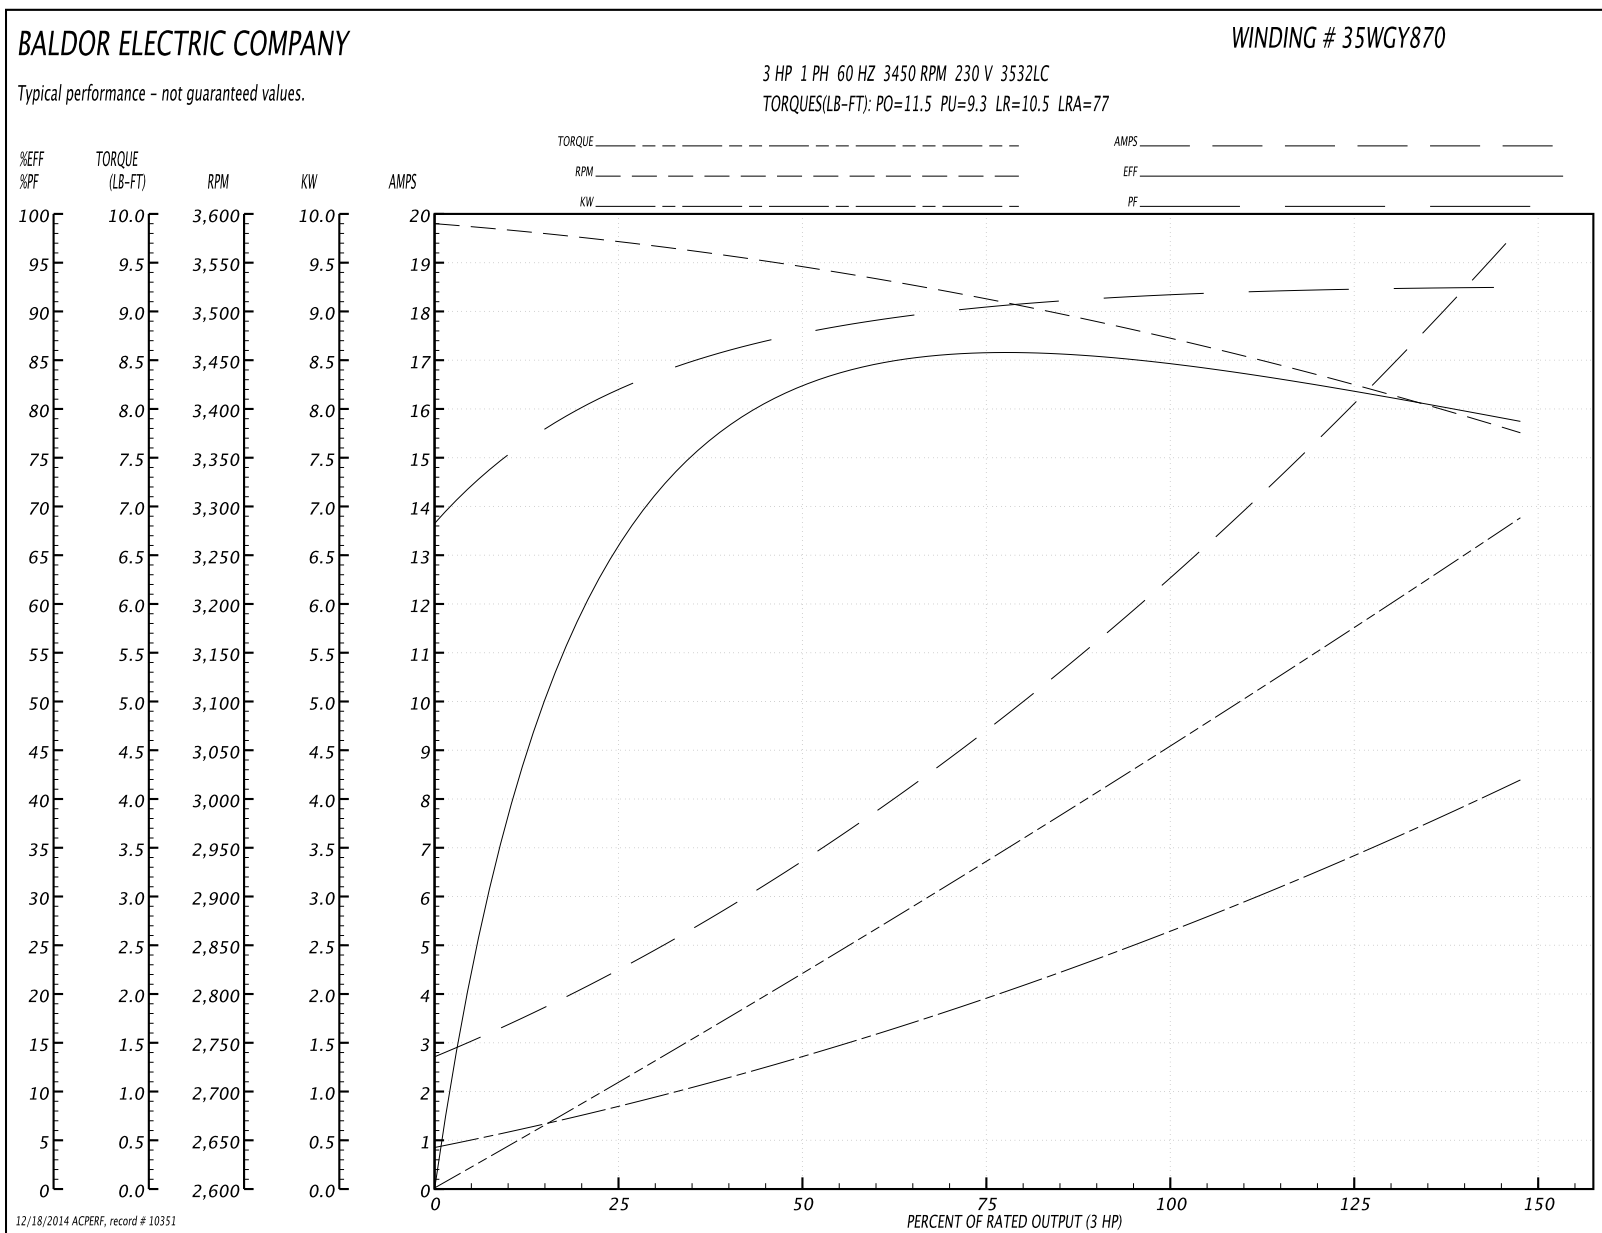

AC Induction Motor Performance Data

Record # 38571 - Typical performance - not guaranteed values

Winding: 35WGY870-R001	Type: 3532LC	Enclosure: TEFC
-------------------------------	---------------------	------------------------

Nameplate Data				230 V, 60 Hz: Single Voltage Motor	
Rated Output (HP)	3			Full Load Torque	4.65 LB-FT
Volts	230			Start Configuration	direct on line
Full Load Amps	12.5			Breakdown Torque	10.4 LB-FT
R.P.M.	3450			Pull-up Torque	8.29 LB-FT
Hz	60	Phase	1	Locked-rotor Torque	10.7 LB-FT
NEMA Design Code	L	KVA Code	G	Starting Current	79.3 A
Service Factor (S.F.)	1.15			No-load Current	1.97 A
NEMA Nom. Eff.	85.5	Power Factor	95	Line-line Res. @ 25°C	0.80257 Ω A Ph 1.4763 Ω B Ph
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	104°C
S.F. Amps				Temp. Rise @ S.F. Load	136°C

Load Characteristics 230 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	95	98	100	100	99	98	99
Efficiency	66.4	76.2	79.4	78.2	74.4	67.8	75.9
Speed	3553.8	3518.2	3479.4	3428.6	3362.2	3254.4	3389
Line amperes	4.09	6.62	9.37	12.7	16.6	22.2	15

Performance Graph at 230V, 60Hz, 3.0HP Typical performance - Not guaranteed values

