





Rolling Elements: Tapered Roller
Housing: Fluoropolymer Coated Cast Iron Four Bolt Pillow Block
Self Alignment: +/- 3 Degrees
Lock: Setscrew, Single Lock Collar
Seal: Single Lip Contact
Temperature: -20° to 220° F
Grease: Sealmaster GoldPlex-FG

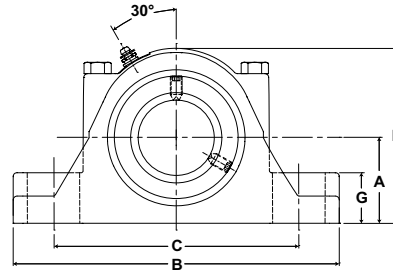

RPBA-CR Series Four-Bolt Base Pillow Blocks - Single Lock Collar

Bore Diameter		Standard Seal Part No.	Basic Dynamic Rating lb/N	Approx. Wt lb/kg	Dimensions inch/mm											Bolt Size
					A	B	C		D	E	G	H	J	K	L	
inch	mm						Min.	Max.								
2 1/4		RPBA 204-C4 CR														
2 7/16		RPBA 207-C4 CR														
2 1/2		RPBA 208-C4 CR	9030	22.4	2 3/4	10 3/8	7 3/4	8 3/4	3 1/2	1 7/8	1 5/8	5 5/8	3 5/16	2	3 15/16	5/8
	60	RPBA 60MM-C4 CR	40165	10.2	69.9	263.5	196.9	222.3	88.9	47.6	41.3	142.9	84.1	50.8	100.0	
	65	RPBA 65MM-C4 CR														
2 11/16		RPBA 211-C4 CR														
2 3/4		RPBA 212-C4 CR														
2 15/16		RPBA 215-C4 CR	9630	31.5	3 1/8	11 3/4	8 3/4	10	3 3/4	2 1/8	1 3/4	6 3/8	3 11/16	2 1/2	4 23/32	3/4
3		RPBA 300-C4 CR	42834	14.3	79.4	298.5	222.3	254.0	95.3	54.0	44.5	161.9	93.7	63.5	119.9	
	70	RPBA 70MM-C4 CR														
	75	RPBA 75MM-C4 CR														
3 3/16		RPBA 303-C4 CR														
3 1/4		RPBA 304-C4 CR														
3 7/16		RPBA 307-C4 CR														
3 1/2		RPBA 308-C4 CR	15320	59.8	3 3/4	13 3/4	10 9/16	11 1/2	4 1/2	2 3/8	2 1/16	7 3/4	4 3/16	2 1/2	5 7/16	7/8
	80	RPBA 80MM-C4 CR	68143	27.1	95.3	349.3	268.3	292.1	114.3	60.3	52.4	196.9	106.4	63.5	138.1	
	85	RPBA 85MM-C4 CR														
	90	RPBA 90MM-C4 CR														
	95	RPBA 95MM-C4 CR														
3 15/16		RPBA 315-C4 CR														
4		RPBA 400-C4 CR	20980	76.9	4 1/4	15 1/4	11	13	4 1/2	2 1/4	2 7/16	8 5/8	5 1/4	3 1/8	5 15/16	5/8
	100	RPBA 100MM-C4 CR	93319	34.9	108.0	387.4	279.4	330.2	114.3	57.2	61.9	219.1	133.4	79.4	150.8	
	105	RPBA 105MM-C4 CR														
4 7/16		RPBA 407-C4 CR														
4 1/2		RPBA 408-C4 CR	25750	95.6	4 3/4	16 1/2	11 3/4	13 7/8	4 5/8	2 1/2	2 7/8	9 5/8	5 1/2	3 3/8	6 1/2	3/4
	110	RPBA 110MM-C4 CR	114536	43.4	120.7	419.1	298.5	352.4	117.5	63.5	73.0	244.5	139.7	85.7	165.1	
	115	RPBA 115MM-C4 CR														
4 15/16		RPBA 415-C4 CR														
5		RPBA 500-C4 CR	35520	143.6	5 1/2	18 1/2	13 1/2	15 7/8	5 1/8	2 3/4	3 1/8	11	6 13/64	3 5/8	7 5/16	7/8
	120	RPBA 120MM-C4 CR	157993	65.1	139.7	469.9	342.9	403.2	130.2	69.9	79.4	279.4	157.6	92.1	185.7	
	125	RPBA 125MM-C4 CR														

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.