


SystemOne Recessed 4 Inch Core Hole Kits, for Use In Concrete Floors

One-Piece Pre-Wired, Quad Receptacle, Recessed Connectivity, Fire-Rated Poke-Through for Power Only

Assembled unit includes:

- (1) Hubbell SystemOne 4 inch recessed floor fitting (S1R4PTFIT)
- (1) Hubbell SystemOne 4 inch recessed activation cover (S1R4CVRxx)
- (1) Hubbell pre-wired quad receptacle with mounting plate (S1R4SPQUAD)
- (1) Hubbell Junction box (S1FRPTJB)

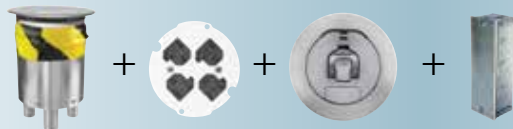


Finish	Catalog Number
Brushed Aluminum	S1R4PTQUADALU
Brushed Brass Plated	S1R4PTQUADBRS
Antique Bronze Plated	S1R4PTQUADBRZ
Satin Nickel Plated	S1R4PTQUADNKL
Black Powder Coat	S1R4PTQUADBLK
Gray Powder Coat	S1R4PTQUADGRY



One-Piece, Fire-Rated Poke-Through, Recessed Connectivity

Assembled unit includes:

- (1) Hubbell SystemOne 4 inch recessed floor fitting (S1R4PTFIT)
- (1) Hubbell SystemOne 4 inch recessed activation cover (S1R4CVRxx)
- (1) Hubbell Junction box (S1FRPTJB)

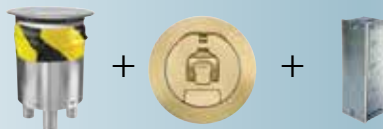

Finish	Catalog Number
Brushed Aluminum	S1R4PTALU
Brushed Brass Plated	S1R4PTBRS
Antique Bronze Plated	S1R4PTBRZ
Satin Nickel Plated	S1R4PTNKL
Black Powder Coat	S1R4PTBLK
Gray Powder Coat	S1R4PTGRY



Note: xx indicates finish options.

SystemOne Recessed 4 Inch FRPT and Covers, for Use In Concrete Floors

4 Inch Fire-Rated Poke-Through

Description	Catalog Number
4 Inch FRPT includes: Junction box and low voltage dividers.	S1R4PTFIT
4 Inch FRPT includes: Low voltage dividers, junction box NOT included.	S1R4PTFITCHI
4 Inch FRPT includes: Quad sub-plate and junction box.	S1R4PTQUAD

Note: See page P-16 for sub-plates and accessories.
See page P-29 for technical information.



S1R4PTFIT
S1R4PTFITQUAD

Recessed 4 Inch Cover

Single fold under cable egress door. Unit includes solid cast aluminum construction, carpet gasket and mounting hardware.



Finish	Catalog Number
Brushed Aluminum	S1R4CVRALU
Black Powder Coat	S1R4CVRBLK
Brushed Brass Plated	S1R4CVRBRS
Antique Bronze Plated	S1R4CVRBRZ
Gray Powder Coat	S1R4CVRGRY
Satin Nickel Plated	S1R4CVRNKL

Note: COVER LOAD RATING: 1,000 lbs with 2x safety factor. Load applied through a 3" (76mm) mandrel in center of the cover.
Static loads only.



S1R4PTFITCHI