



M-115875

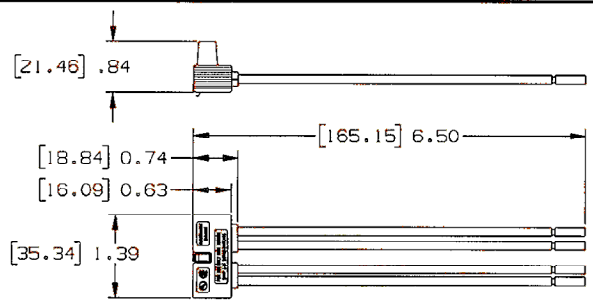

CATALOG NO.	RATING/TYPE	COLOR
SNAPSP2NA	20A 120-277V, SP, STRAND	CLEAR
SNAPSP1NA	20A 120-277V, SP, SOLID	CLEAR
SNAP3W2NA	20A 120-277V, 3W, STRAND	CLEAR
SNAP3W1NA	20A 120-277V, 3W, SOLID	CLEAR
SNAPSP2NA	20A 120-277V, SP, PILOT, STRAND	CLEAR
SNAPSP1NA	20A 120-277V, SP, PILOT, SOLID	CLEAR

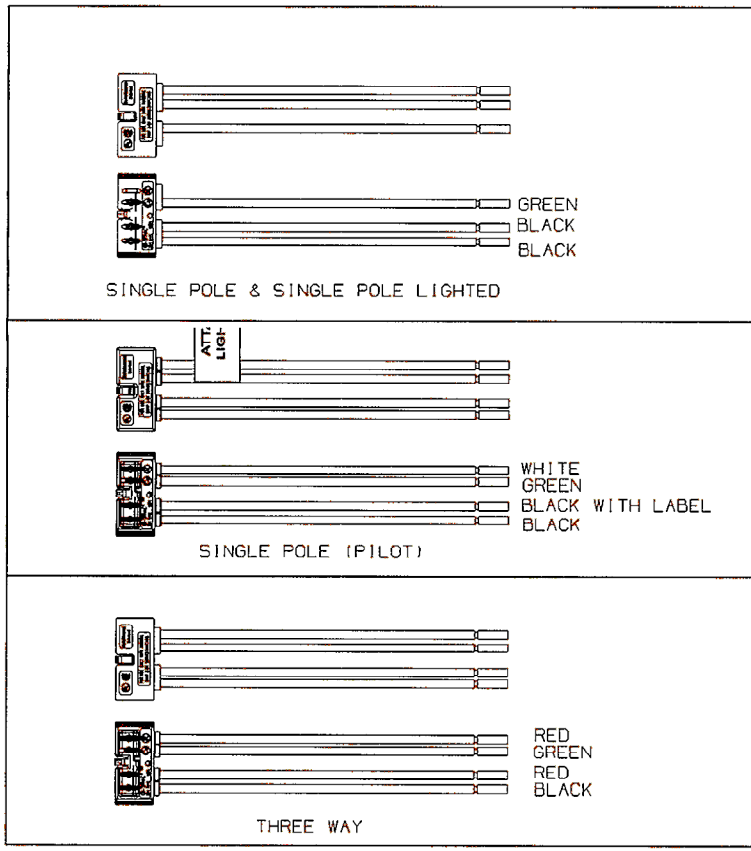

NOTE:  
 1. BASE COLOR: CLEAR  
 COVER COLOR: CLEAR  
 2. ALL DIMENSIONS ARE IN INCH AND (MILLIMETERS)

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	THERMOPLASTIC	NONE
COVER	THERMOPLASTIC	NONE
TERMINAL	BRASS ALLOY	BRIGHT DIP
WIRE	COPPER	NONE
LABEL	LABEL STOCK	

SYM	REVISIONS	APP	DATE
5	5/1/12 REMOVED FLAG FROM SINGLE POLE & SINGLE POLE LIGHTED PER DCN 18820 DMP		5/1/12
4	4-11-12 CHANGED WIRE COLORS ON SINGLE POLE, SINGLE POLE LIGHTED & SINGLE POLE PILOT. ADDED LABEL TO WIRE ON SINGLE POLE PILOT PER DCN 18769		4/11/12
3	1-9-12 REDRAWN AND CHANGED WIRE COLORS ON SINGLE POLE, SINGLE POLE LIGHTED & SINGLE POLE PILOT. PER DCN 18564		1/9/12
2	ALL CAT NOS. CHANGED, SEE DCN17792		6/28/11
1	RELEASED FOR PRODUCTION DCN16897	CZ	10/4/10

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE  
 COMMERCIAL GRADE  
 15A & 20A SNAP CONNECTOR, HUBBELL

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLENS HUBBELL INCORPORATED SHELTON, CT		
.XX : ± .01	DR. BY	F. H.	APP. BY C. Z.
.XXX : ± .005	TR. BY		SCALE
ANGLES : ± 2°	CHK. BY	J. X.	DATE 03/12/10

DIMENSION SHEET FOR CAT. NO. M-115875  
 REPAIRABLE  NON-REPAIRABLE