



Nickel Plated Flange Brackets

With optional bearing inserts:
Stainless Steel-SUCNPFB
Hard Chrome Coated-CUCNPFB
Black Oxide-BUCNPFB



B-type Seal

- B-type Seals
- Overview of corrosion resistant products – pg. 48

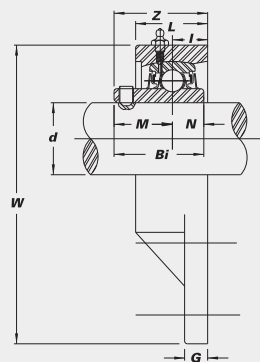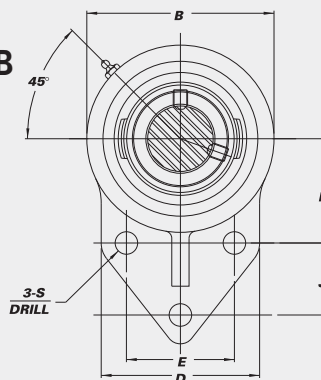

CORROSION RESISTANT

Unit No.	Shaft Dia.		Dimensions (in.) (mm)													Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d	(in.) (mm)	W	B	D	L	S	G	H	J	E	I	Z	Bi	N	M			

SUCNPFB with Stainless Steel Bearing Inserts

SUCNPFB 201-8	1/2																SUC 201-8		
202-10	5/8		4 1/4	2 1/2	2 3/8	1	25	25/64	5/16	1 11/16	7/8	1 1/2	5/8	15/16	1.2205	0.5000	0.7205	202-10	
204-12	3/4		108	64	60	25	9.9	8	43.3	22.2	38.1	16	33.3	31.0	12.7	18.3	5/16	204-12	
204		20																204	1.5
SUCNPFB 205-14	7/8																SUC 205-14		
205		25	4 3/4	2 3/4	2 1/2	1 1/8	25/64	3/8	1 13/16	1 1/8	1 5/8	43/64	1 13/32	1.3386	0.5630	0.7756	5/16	205	1.5
205-16	1		121	70	64	29	9.9	9.5	46.0	28.6	41.3	17	35.7	34.0	14.3	19.7		205-16	
SUCNPFB 206-18	1 1/8																SUC 206-18		
206		30	5 3/8	3 1/4	2 3/4	1 1/4	25/64	3/8	2 1/16	1 1/4	1 7/8	3/4	1 37/64	1.5000	0.6260	0.8740	5/16	206	2.0
206-19	1 3/16		137	83	70	32	9.9	9.5	52.4	31.8	47.6	19	40.2	38.1	15.9	22.2		206-19	
206-20	1 1/4 S																	206-20	
SUCNPFB 207-20	1 1/4																SUC 207-20		
207-21	1 5/16																	207-21	
207-22	1 3/8		6 1/8	3 3/4	3 1/4	17/16	33/64	1/2	2 3/8	1 1/4	2	53/64	1 3/4	1.6890	0.6890	1.0000	7/16	207-22	
207		35	156	95	83	37	13.1	13	60.3	31.8	50.8	21	44.4	42.9	17.5	25.4		207	2.9
207-23	1 7/16																	207-23	
SUCNPFB 208-24	1 1/2																SUC 208-24		
208		40	6 15/32	3 15/16	3 1/16	1 11/32	7/16	5/8	2 23/64	1 39/64	1 31/32	53/64	2 1/64	1.9370	0.7480	1.1890	3/8	208	4.0

CUCNPFB with Hard Chrome Coated Bearing Inserts

CUCNPFB 204-12	3/4																CUC 204-12			
204		20	4 1/4	2 1/2	2 3/8	1	25 5/64	5/16	1 11/16	7/8	1 1/2	5/8	1 5/16	1.2205	0.5000	0.7205	5/16	204	NPFB 204	1.5
CUCNPFB 205-14	7/8																CUC 205-14			
205		25	4 3/4	2 3/4	2 1/2	1 1/8	25 5/64	3/8	1 13/16	1 1/8	1 5/8	43 5/64	1 13/32	1.3386	0.5630	0.7756	5/16	205	NPFB 205	1.5
205-16	1		121	70	64	29	9.9	9.5	46.0	28.6	41.3	17	35.7	34.0	14.3	19.7		205-16		
CUCNPFB 206-18	1 1/8																CUC 206-18			
206		30	5 3/8	3 1/4	2 3/4	1 1/4	25 5/64	3/8	2 1/16	1 1/4	1 7/8	3/4	1 37/64	1.5000	0.6260	0.8740	5/16	206	NPFB 206	2.0
206-19	1 3/16		137	83	70	32	9.9	9.5	52.4	31.8	47.6	19	40.2	38.1	15.9	22.2		206-19		
206-20	1 1/4 S																	206-20		
CUCNPFB 207-20	1 1/4																CUC 207-20			
207-22	1 3/8																	207-22		
207		35	6 1/8	3 3/4	3 1/4	17/16	33 5/64	1/2	2 3/8	1 1/4	2	53 5/64	1 3/4	1.6890	0.6890	1.0000	7/16	207	NPFB 207	2.9
207-23	1 7/16																	207-23		
CUCNPFB 208-24	1 1/2																CUC 208-24			
208		40	6 15/32	3 15/16	3 1/16	1 11/32	7/16	5/8	2 23/64	1 39/64	1 31/32	53 5/64	2 1/64	1.9370	0.7480	1.1890	3/8	208-24	NPFB 208	4.0
208-24			164	100	78	34	11.1	16	60	41	50.0	21	51.2	49.2	19.0	30.2		208		

BUCNPFB with Black Oxide Bearing Inserts

BUCNPFB	201-8 202-10 204-12 204	1/2 5/8 3/4																	BUC	201-8 202-10 204-12 204			
			4 1/4 108	2 1/2 64	2 3/8 60	1 25	25/64 9.9	5/16 8	1 11/16 43.3	7/8 22.2	1 1/2 38.1	5/8 16	1 5/16 33.3	1.2205 31.0	0.5000 12.7	0.7205 18.3	5/16						
BUCNPFB	205-14 205 205-16	7/8 1																	BUC	205-14 205 205-16			
			4 3/4 121	2 3/4 70	2 1/2 64	1 1/8 29	25/64 9.9	3/8 9.5	1 13/16 46.0	1 1/8 28.6	1 5/8 41.3	43/64 17	1 13/32 35.7	1.3386 34.0	0.5630 14.3	0.7756 19.7	5/16						
BUCNPFB	206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4 S																	BUC	206-18 206 206-19 206-20			
			5 3/8 137	3 1/4 83	2 3/4 70	1 1/4 32	25/64 9.9	3/8 9.5	2 1/16 52.4	1 1/4 31.8	1 7/8 47.6	3/4 19	1 37/64 40.2	1.5000 38.1	0.6260 15.9	0.8740 22.2	5/16						
BUCNPFB	207-20 207-22 207 207-23	1 1/4 1 3/8 1 1/4 S																	BUC	207-20 207-22 207 207-23			
			6 1/8 156	3 3/4 95	3 1/4 83	1 7/16 37	33/64 13.1	1/2 13	2 3/8 60.3	1 1/4 31.8	2 50.8	53/64 21	1 3/4 44.4	1.6890 42.9	0.6890 17.5	1.0000 25.4	7/16						
BUCNPFB	208-24 208	1 1/2																	BUC	208-24 208			
			6 15/32 164	3 15/16 100	3 1/16 78	1 11/32 34	7/16 11.1	5/8 16	2 23/64 60	1 39/64 41	1 31/32 50.0	53/64 21	2 1/64 51.2	1.9370 49.2	0.7480 19.0	1.1890 30.2	3/8						