

Nickel Plated Piloted Flanges





With optional bearing inserts:
Stainless Steel-SUCNPFCS
Hard Chrome Coated-CUCNPFCS

• B-type Seals

• Overview of corrosion
resistant products – pg. 48



B-type Seal

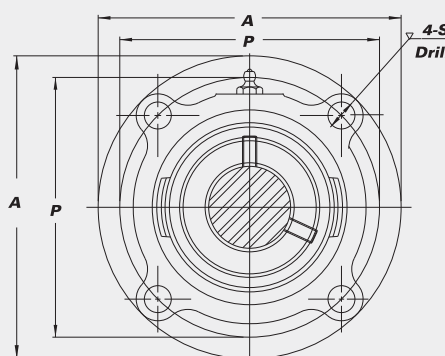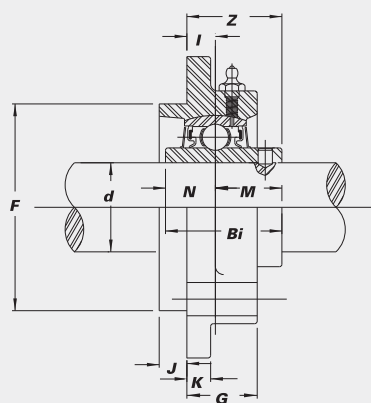

CORROSION RESISTANT

Unit No.	Shaft Dia. d (in.) (mm)	A	P	S	J	K	G	F	I	Z	Bi	N	M	Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
SUCNPFCS with Stainless Steel Bearing Inserts																	
SUCNPFCS 206-18 206	1 1/8 30	4 3/8	3 5/8	3/8	15/64	3/8	15/16	3.000	25/64	1 9/32	1.5000	0.6260	0.8740	5/16	SUC 206-18 206	NPFC X05	2.6
206-19 206-20	1 3/16 1 1/4S	111	92	9.5	6.0	9.5	24.0	76.2	10	32.2	38.1	15.9	22.2		206-19 206-20		
SUCNPFCS 207-20 207-21 207-22 207	1 1/4 1 5/16 1 3/8	5	4 1/8	15/32	3/8	3/8	7/8	3.375	5/16	1 1/16	1.6890	0.6890	1.0000	3/8	SUC 207-20 207-21 207-22 207	NPFC X06	3.3
207-23	1 7/16	127	104.8	12.0	9.5	9.5	22.5	85.7	8	33.4	42.9	17.5	25.4		207-23		
SUCNPFCS 208-24 208	1 1/2 40	5 1/4	4 3/8	15/32	7/16	7/16	1 1/32	3.625	23/64	1 17/32	1.9370	0.7480	1.1890	3/8	SUC 208-24 208	NPFC X07	4.2
SUCNPFCS 209-27 209-28 209	1 11/16 1 3/4	5 1/4	4 3/8*	15/32	7/16	7/16	1 1/32	3.625*	23/64	1 17/32	1.9370	0.7480	1.1890	3/8	SUC 209-27 209-28 209	NPFC X08	4.4
SUCNPFCS 210-31 210 210-32	1 15/16 2S	6 3/32	5 1/8	35/64	15/32	7/16	1	4.250	5/16	1 19/32	2.0315	0.7480	1.2835	7/16	SUC 210-31 210 210-32	NPFC X09	5.7
SUCNPFCS 211-32 211-35	2 2 3/16	6 3/8	5 3/8	35/64	5/8	7/16	1	4.500	9/32	1 19/32	2.1890	0.8740	1.3150	7/16	SUC 211-32 211-35	NPFC X10	7.0
SUCNPFCS 212-39	2 7/16	7 3/32	6	5/8	55/64	1/2	1 1/32	5.000	5/32	1 23/32	2.5630	1.0000	1.5630	1/2	SUC 212-39	NPFC X11	9.5

CUCNPFCS with Hard Chrome Coated Bearing Inserts

CUCNPFCS 206-18 206	1 1/8 30	4 3/8	3 5/8	3/8	15/64	3/8	15/16	3.000	25/64	1 9/32	1.5000	0.6260	0.8740	5/16	CUC 206-18 206	NPFC X05	2.6
206-19 206-20	1 3/16 1 1/4S	111	92	9.5	6.0	9.5	24.0	76.2	10	32.2	38.1	15.9	22.2		206-19 206-20		
CUCNPFCS 207-20 207-22 207	1 1/4 1 3/8	5	4 1/8	15/32	3/8	3/8	7/8	3.375	5/16	1 1/16	1.6890	0.6890	1.0000	3/8	CUC 207-20 207-22 207	NPFC X06	3.3
207-23	1 7/16	127	104.8	12.0	9.5	9.5	22.5	85.7	8	33.4	42.9	17.5	25.4		207-23		
CUCNPFCS 208-24 208	1 1/2 40	5 1/4	4 3/8	15/32	7/16	7/16	1 1/32	3.625	23/64	1 17/32	1.9370	0.7480	1.1890	3/8	CUC 208-24 208	NPFC X07	4.2
CUCNPFCS 209-27 209-28 209	1 11/16 1 3/4	5 1/4	4 3/8*	15/32	7/16	7/16	1 1/32	3.625*	23/64	1 17/32	1.9370	0.7480	1.1890	3/8	CUC 209-27 209-28 209	NPFC X08	4.4
CUCNPFCS 210-31 210 210-32	1 15/16 2S	6 3/32	5 1/8	35/64	15/32	7/16	1	4.250	5/16	1 19/32	2.0315	0.7480	1.2835	7/16	CUC 210-31 210 210-32	NPFC X09	5.7

* Also available in FCF(209) style housing where P=5/16, F=4.250.
See pg. 33 for other details.