

Thermoplastic 3-Bolt Flanges

With Set Screw Lock

Optional bearing inserts:
Stainless Steel-SUCTFB
Hard Chrome Coated-CUCTFB
Black Oxide-BUCTFB

• End Caps Available for all styles.





B-type Seal



L3-type Seal

B-type seal available in all styles and sizes.

L3-type seal available in SUC units only. Limited sizes. Consult IPTCI for speed limitations.

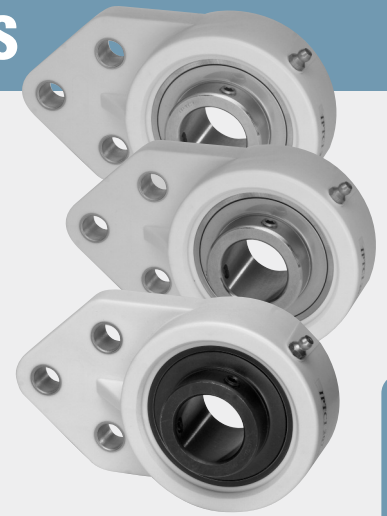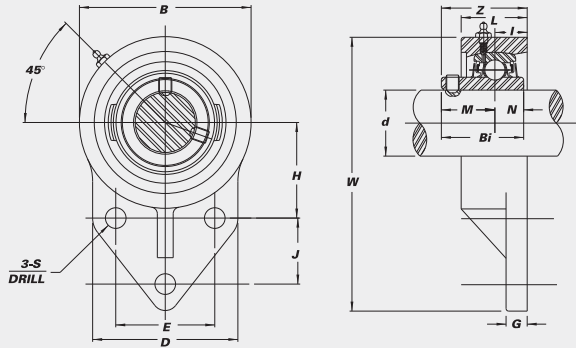

CORROSION RESISTANT

Unit No.	Shaft Dia.		Dimensions (in.) (mm)													Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d		W	B	D	L	S	G	H	J	E	I	Z	Bi	N	M			
	(in.) (mm)																(in.)		

SUCTFB with Stainless Steel Bearing Inserts

SUCTFB 201-8	1/2																SUC 201-8		
202-10	5/8																202-10		
204-12	3/4																204-12		
204		20	4 1/4	2 1/2	2 7/16	1 1/32	25/64	7/16	1 11/16	7/8	1 1/2	19/32	1 5/16	1.2205	0.5000	0.7205	5/16	TFB 204	.6
			108	64	62	26	9.9	11	43.3	22.2	38.1	15	33.3	31.0	12.7	18.3			
SUCTFB 205-14	7/8																SUC 205-14		
205		25	4 3/4	2 3/4	2 1/2	1 1/32	25/64	7/16	1 13/16	1 5/8	1 5/8	21/32	1 15/32	1.3386	0.5630	0.7756	5/16	TFB 205	.7
205-16	1		121	70	64	34	9.9	11	46.0	28.6	41.3	16.5	37.1	34.0	14.3	19.7			
SUCTFB 206-18	1 1/8																SUC 206-18		
206		30	5 3/8	3 1/4	3	1 1/4	25/64	17/32	2 1/16	1 1/4	1 7/8	45/64	1 19/32	1.5000	0.6260	0.8740	5/16	TFB 206	1.1
206-19	1 3/16		137	83	76	32	9.9	13	52.4	31.8	47.6	18	40.6	38.1	15.9	22.2			
206-20	1 1/4 S																206-19		
																	206-20		
SUCTFB 207-20	1 1/4																SUC 207-20		
207-21	1 5/16																207-21		
207-22	1 3/8																207-22		
207		35	6 1/8	3 3/4	3 1/2	1 7/16	33/64	4 1/64	2 3/8	1 1/4	2	3/4	1 49/64	1.6890	0.6890	1.0000	7/16	TFB 207	1.5
207-23	1 7/16		156	95	89	37	13.1	16	60.3	31.8	50.8	19	45.0	42.9	17.5	25.4			
																	207		
																	207-23		

CUCTFB with Hard Chrome Coated Bearing Inserts

CUCTFB 204-12	3/4																CUC 204-12		
204		20	4 1/4	2 1/2	2 7/16	1 1/32	25/64	7/16	1 11/16	7/8	1 1/2	19/32	1 5/16	1.2205	0.5000	0.7205	5/16	TFB 204	.6
			108	64	62	26	9.9	11	43.3	22.2	38.1	15	33.3	31.0	12.7	18.3			
CUCTFB 205-14	7/8																CUC 205-14		
205		25	4 3/4	2 3/4	2 1/2	1 1/32	25/64	7/16	1 13/16	1 5/8	1 5/8	21/32	1 15/32	1.3386	0.5630	0.7756	5/16	TFB 205	.7
205-16	1		121	70	64	34	9.9	11	46.0	28.6	41.3	16.5	37.1	34.0	14.3	19.7			
CUCTFB 206-18	1 1/8																CUC 206-18		
206		30	5 3/8	3 1/4	3	1 1/4	25/64	17/32	2 1/16	1 1/4	1 7/8	45/64	1 19/32	1.5000	0.6260	0.8740	5/16	TFB 206	1.1
206-19	1 3/16		137	83	76	32	9.9	13	52.4	31.8	47.6	18	40.6	38.1	15.9	22.2			
206-20	1 1/4 S																206-19		
																	206-20		
CUCTFB 207-20	1 1/4																CUC 207-20		
207-22	1 3/8																207-22		
207		35	6 1/8	3 3/4	3 1/2	1 7/16	33/64	4 1/64	2 3/8	1 1/4	2	3/4	1 49/64	1.6890	0.6890	1.0000	7/16	TFB 207	1.5
207-23	1 7/16		156	95	89	37	13.1	16	60.3	31.8	50.8	19	45.0	42.9	17.5	25.4			
																	207		
																	207-23		

BUCTFB with Black Oxide Bearing Inserts

BUCTFB 201-8	1/2																BUC 201-8		
202-10	5/8																202-10		
204-12	3/4																204-12		
204		20	4 1/4	2 1/2	2 7/16	1 1/32	25/64	7/16	1 11/16	7/8	1 1/2	19/32	1 5/16	1.2205	0.5000	0.7205	5/16	TFB 204	.6
			108	64	62	26	9.9	11	43.3	22.2	38.1	15	33.3	31.0	12.7	18.3			
BUCTFB 205-14	7/8																BUC 205-14		
205		25	4 3/4	2 3/4	2 1/2	1 1/32	25/64	7/16	1 13/16	1 5/8	1 5/8	21/32	1 15/32	1.3386	0.5630	0.7756	5/16	TFB 205	.7
205-16	1		121	70	64	34	9.9	11	46.0	28.6	41.3	16.5	37.1	34.0	14.3	19.7			
BUCTFB 206-18	1 1/8																BUC 206-18		
206		30	5 3/8	3 1/4	3	1 1/4	25/64	17/32	2 1/16	1 1/4	1 7/8	45/64	1 19/32	1.5000	0.6260	0.8740	5/16	TFB 206	1.1
206-19	1 3/16		137	83	76	32	9.9	13	52.4	31.8	47.6	18	40.6	38.1	15.9	22.2			
206-20	1 1/4 S																206-19		
																	206-20		
BUCTFB 207-20	1 1/4																BUC 207-20		
207-21	1 5/16																207-21		
207-22	1 3/8																207-22		
207		35	6 1/8	3 3/4	3 1/2	1 7/16	33/64	4 1/64	2 3/8	1 1/4	2	3/4	1 49/64	1.6890	0.6890	1.0000	7/16	TFB 207	1.5
207-23	1 7/16		156	95	89	37	13.1	16	60.3	31.8	50.8	19	45.0	42.9	17.5	25.4			
																	207		
																	207-23		