




SIDE

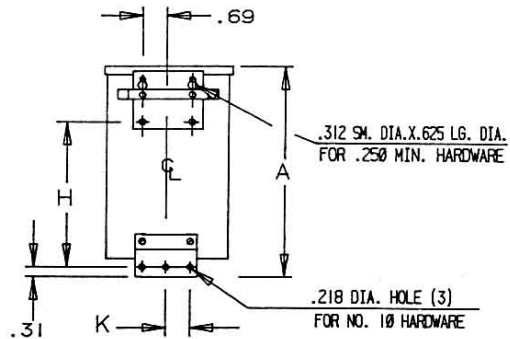


BACK (1)

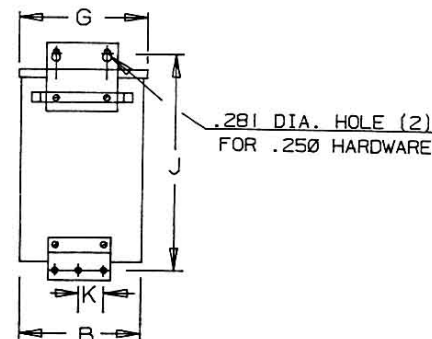

BACK (2)

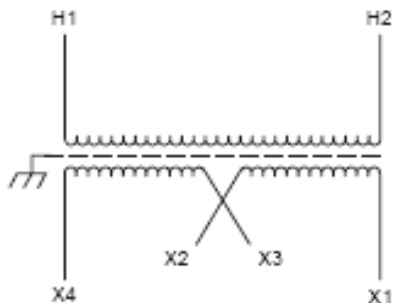

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	H1-H2		
Secondary Volts			
240		X2 to X3	X1-X4
120/240		X2 to X3	X1-X2-X4
120		X1 to X3 X2 to X4	X1-X4



BOTTOM

KVA	CATALOG NUMBER	VOLTAGE		Enclosure Rating	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
1.0	T-2-53110-S	600	120/240	NEMA 3R	24 Lbs	1φ	60 Hz

Winding Rise	115°C
Insulation	180°C
Sound Level	45 dB

TYPICAL PERFORMANCE DATA

Regulation @ 100% PF	
----------------------	--

IMPEDANCE	
-----------	--

Typical Efficiency	
Full Load Losses	
No Load Losses	

A	B	C	D	E	F	G	H	J	K
10.02	5.40	5.13	1.67	4.92	9.18	5.50	6.53	10.50	1.50

Revisions



Type No.

A

PRINTS TO

CONTROL
7