
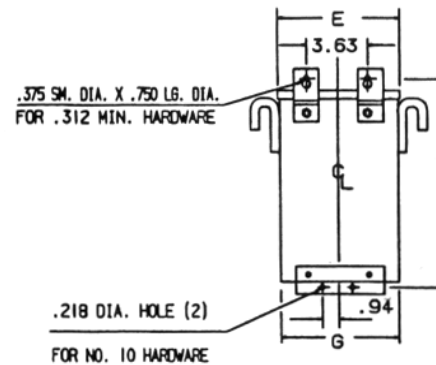




Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
480	H1, H2, H3	1	
456	H1, H2, H3	2	
432	H1, H2, H3	3	
Secondary Volts			
240			X1, X2, X3
120			X1, X4 or X2, X4

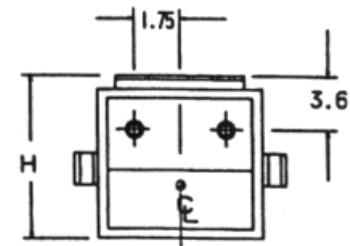

BOTTOM

NOTES:

1. KNOCKOUTS:

1.69 DIA. FOR 1.25 CONDUIT
1.13 DIA. FOR .75 CONDUIT

KVA	CATALOG NUMBER			VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
				HIGH	LOW				
3.0	T-2A-53328-1S			480Δ	240Δ/120		75 Lbs	3ϕ	60 Hz
	A	B	C	D	E	F	G	H	
	12.37	11.63	7.12	9.06	9.87	10.89	9.75	7.47	
	Insulation:	180°C	Encapsulated			Temp Rise:		115°C	

Revisions



Type No.

DATE: Jan 29, 2009

A

PRINTS TO

CONTROL
7