
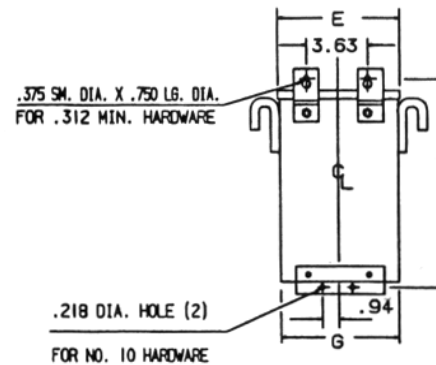




BOTTOM

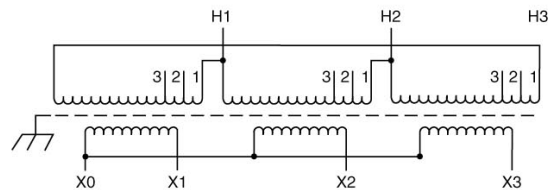

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
240	H1, H2, H3	1	
228	H1, H2, H3	2	
216	H1, H2, H3	3	

Secondary Volts

208			X1, X2, X3
120 1 phase			X1 to X0 X2 to X0 X3 to X0

NOTES:

I. KNOCKOUTS:

1.69 DIA. FOR 1.25 CONDUIT

1.13 DIA. FOR .75 CONDUIT

KVA	CATALOG NUMBER			VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
				HIGH	LOW				
9.0	T-2A-53360-1S			240Δ	208Y/120		180 Lbs	3ϕ	60 Hz
	A	B	C	D	E	F	G	H	
	17.77	15.28	11.17	12.71	15.27	14.03	15.15	11.52	

Revisions



Type No.

DATE:

May 17, 2007

A

PRINTS
TO

CONTROL
7