
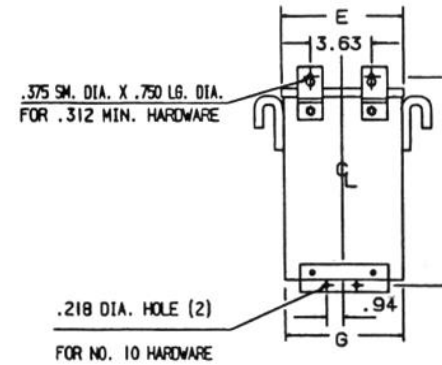




BOTTOM

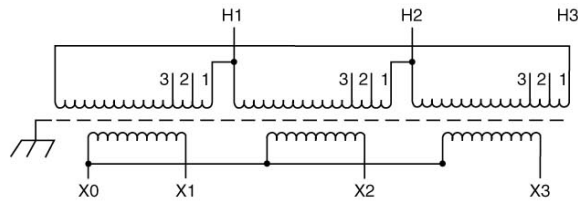

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	H1, H2, H3	1	
570	H1, H2, H3	2	
540	H1, H2, H3	3	

Secondary Volts

208			X1, X2, X3
120 1 phase			X1 to X0 X2 to X0 X3 to X0

NOTES:

1. KNOCKOUTS:

1.69 DIA. FOR 1.25 CONDUIT
1.13 DIA. FOR .75 CONDUIT

Revisions



Type No.

DATE: Jan 20, 2010

KVA	CATALOG NUMBER		VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
			HIGH	LOW				
6.0	T-2A-79331-1S		600Δ	208Y/120		140 Lbs	3φ	60 Hz
	A	B	C	D	E	F	G	H
	14.17	12.55	8.47	9.98	11.67	11.83	11.55	8.82
Insulation:		180°C	Encapsulated Design		Temp Rise:		115°C	

A

PRINTS
TO

CONTROL
7