
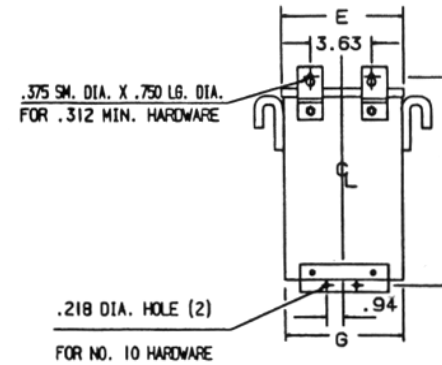




Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	H1, H2, H3	1	
570	H1, H2, H3	2	
540	H1, H2, H3	3	
Secondary Volts			
480			X1, X2, X3
277 1 phase			X1 to X0 X2 to X0 X3 to X0

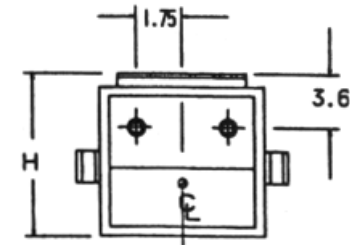

BOTTOM

NOTES:

I. KNOCKOUTS:

1.69 DIA. FOR 1.25 CONDUIT
1.13 DIA. FOR .75 CONDUIT

KVA	CATALOG NUMBER			VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
				HIGH	LOW				
9.0	T-2A-79518-1S			600Δ	480Y/277		180 Lbs	3ϕ	60 Hz
	A	B	C	D	E	F	G	H	
	17.77	15.28	11.17	12.71	15.27	14.03	15.15	11.52	
	Insulation:	180°C	Encapsulated / NEMA-3R			Temp Rise:	115°C		

Revisions



Type No.

DATE: May 17, 2007

A

PRINTS
TO

CONTROL
7