



Revisions

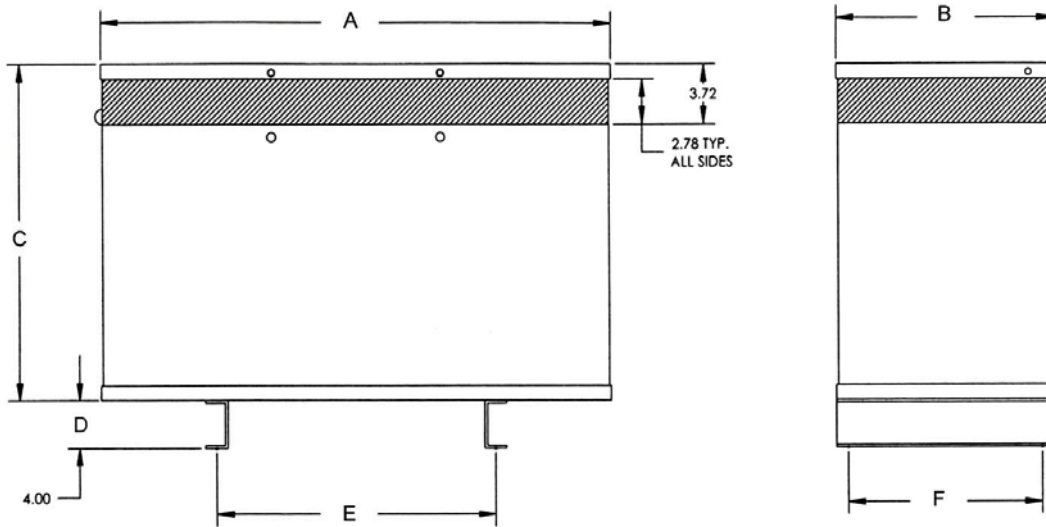

PRIMARY: 600 Volts
SECONDARY: 480 Volts
TAPS: 2, 5% BNFC

NOTES:
 1. DENOTES CONDUIT AREA.

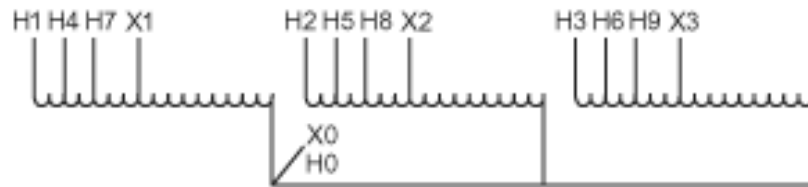

Primary Volts	Alt Rating	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	480	H1, H2, H3		
570	456	H4, H5, H6		
540	432	H7, H8, H9		
Secondary Volts				
480	380			X1, X2, X3
277 1 phase	220 1 phase			X1 to X0 X2 to X0 X3 to X0



CD SHEET

KVA	CATALOG NUMBER	VOLTAGE		Enclosure	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
75	T-3-52710-1	600	480	NEMA-3R	300 Lbs	3	60 Hz
Auto	A	B	C	D	E	F	
(In.)	20.30	9.03	14.86	4.00	13.25	7.00	

Type No. _____

DRAWN: _____

DESIGN _____

CHK. _____ APP. _____

MAT'L _____

FINISH _____

SCALE _____ SHEET _____