



Diagram 1

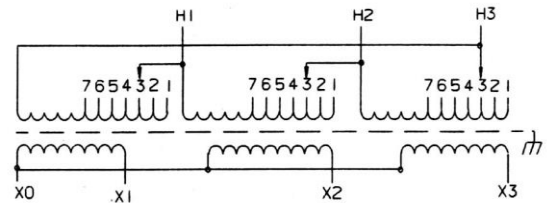

PRIMARY VOLTS	%	CONNECT LEADS TO TAP NO.
504	105	1
492	102.5	2
480	100	3
468	97.5	4
456	95	5
444	92.5	6
432	90	7



PRIMARY LINES TO H1-H2-H3  
SECONDARY LINES TO X0-X1-X2-X3

## Revisions



KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
75	TP-3500075-3S	480Δ	480Y/277	WS-A-2	600 Lbs	3φ	60 Hz

### TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	50 dB

Windings	AL
Standards	TP-1

Impedance	5.8%
Electrostatic Shield	

Typical Efficiency	98.19%
No Load Losses	233 W
Full Load Losses	2,988 W

A

PRINTS TO

CONTROL  
7