



PRIMARY VOLTS	%	CONNECT LEADS TO TAP NO.
504	105	1
492	102.5	2
480	100	3
468	97.5	4
456	95	5
444	92.5	6
432	90	7




PRIMARY LINES TO H1-H2-H3  
SECONDARY LINES TO X0-X1-X2-X3

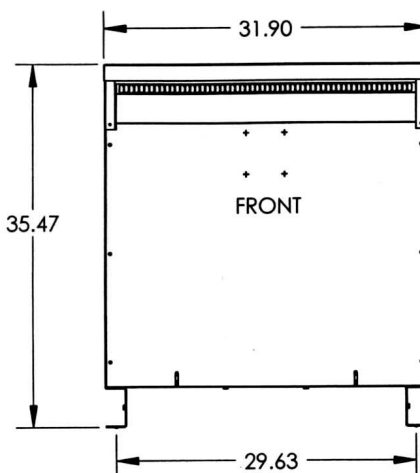

NOTE:  
PRIMARY AND SECONDARY BUS AREA  
IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS

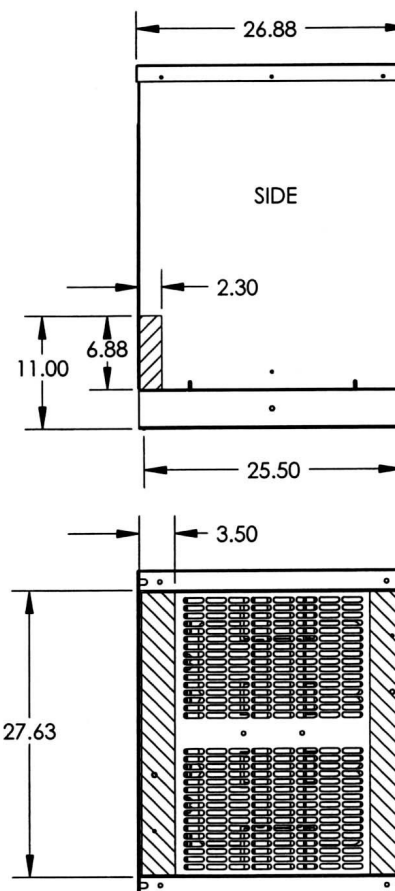

## Revisions



Type No.

DRAWN:

DATE: November 26, 2012

### CASE 3

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
112.5	<b>TP-53315-3S</b>	480Δ	208Y/120	WS-A-3	945 Lbs	3φ	60 Hz

Winding Rise:	150°C
Insulation:	220°C
Sound Level:	50db

### TYPICAL PERFORMANCE DATA

Regulation @ 100% PF:	3.48%
Standards:	TP-1

Windings:	AL
Impedance:	5.75%

Typical Efficiency:	98.22%
No Load Losses:	374 W
Full Load Losses:	4,035 W

Meets TP-2002 Efficiency

Control  
7

MX