
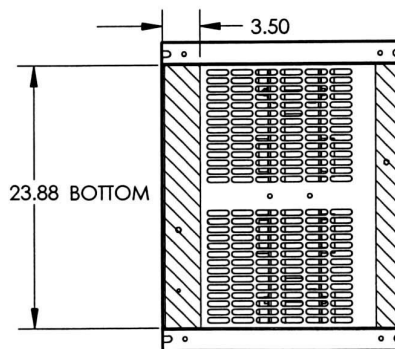
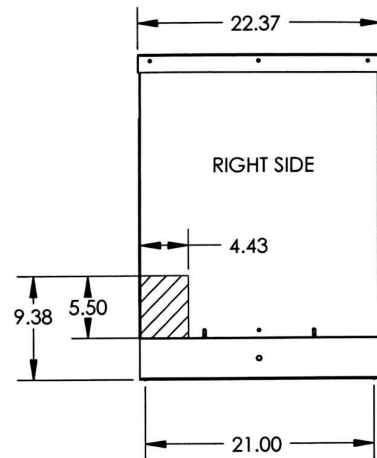


Primary Volts	%	Connect Leads to Tap No.
218	105	1
213	102.5	2
208	100	3
203	97.5	4
198	95	5

Secondary Volts

208		X1, X2, X3
120		X1 & X0
1 phase		X2 & X0
		X3 & X0

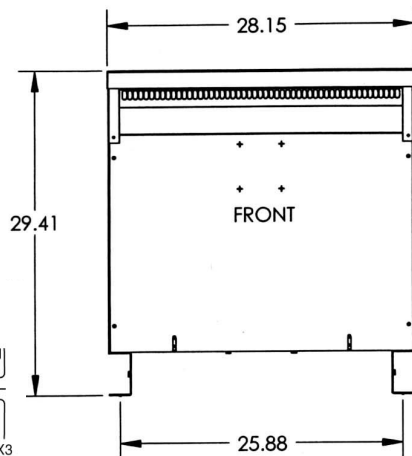

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		LOW	HIGH				
75	TP-79274-4S	208Δ	208Y/120	WS-A-2	500 Lbs	3φ	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	50 dB

Regulation @ 100% PF	3.1%
NEMA Standard	TP-1

Impedance	5.097%
Windings	AL

Typical Effic. @ 35%	98.16%
No Load Losses	286W
Total Load Losses	2,553W

Revisions



Type No.

A

PRINTS
TO

CONTROL
7