



Revisions



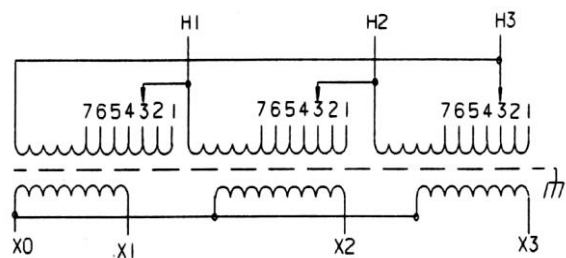


PRIMARY VOLTS	%	CONNECT LEADS TO TAP NO.
504	105	1
492	102.5	2
480	100	3
468	97.5	4
456	95	5
444	92.5	6
432	90	7



PRIMARY LINES TO H1-H2-H3

SECONDARY LINES TO X0-X1-X2-X3

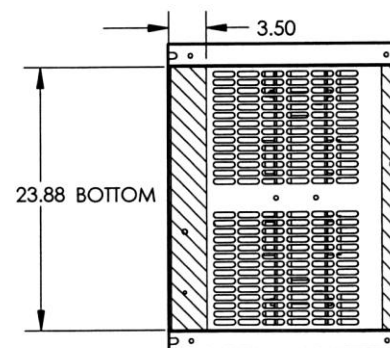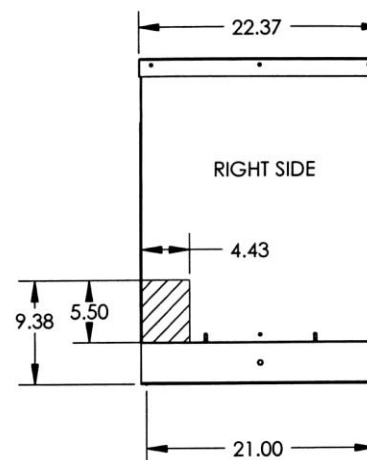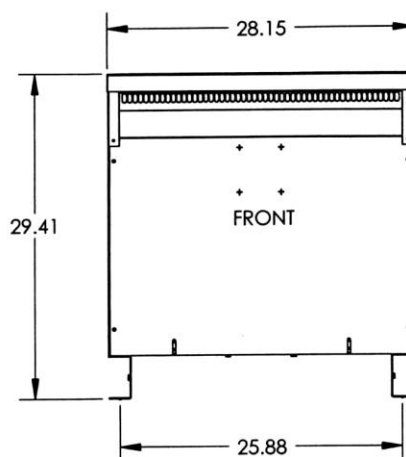

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
30	TPC3-53312-3S	480Δ	208Y/120	WS-A-2	380 Lbs	3φ	60 Hz

Winding Rise:	130°C
Insulation:	220°C
Sound Level:	45db

TYPICAL PERFORMANCE DATA

Regulation @ 100% PF:	2.56%
Standards:	C3

Windings:	CU
Impedance:	3.75%

Typical Efficiency:	98.32%
No Load Losses:	90 W
Full Load Losses:	810 W

Type No.

DRAWN:

DATE: June 29, 2011

CASE 2

Control
7

A