



NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS

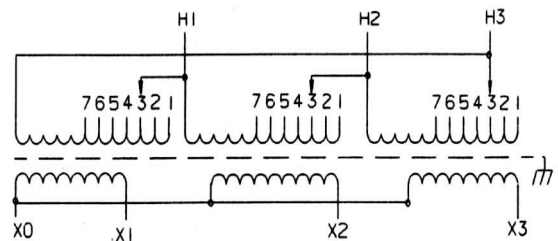

PRIMARY VOLTS	%	CONNECT LEADS TO TAP NO.
504	105	1
492	102.5	2
480	100	3
468	97.5	4
456	95	5
444	92.5	6
432	90	7



PRIMARY LINES TO H1-H2-H3  
SECONDARY LINES TO X0-X1-X2-X3

## Revisions



Type No.

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
45	TPC-53313-3S	480Δ	208Y/120	WS-A-1	397 Lbs	3φ	60 Hz

### TYPICAL PERFORMANCE DATA

Winding Rise	150°C	Regulation @ 100% PF		Impedance		Typical Efficiency	97.98%
Insulation	220°C					No Load Losses	200 W
Sound Level	45 dB	NEMA Standard	TP-1	Windings	CU	Full Load Losses	1548W

Meets TP-2002 Efficiency

A

PRINTS TO

CONTROL  
7

A