


UCFCS 4-Bolt Piloted Flange Units



Standard duty with set screw lock.

- Cast iron housing
- Wide inner race bearing



- B-type seals
- L3-type seals available in some sizes



B-type Seal



L3-type Seal

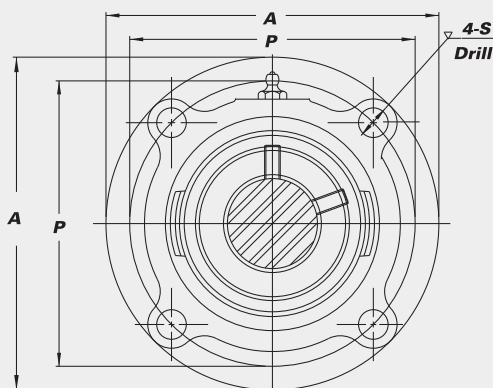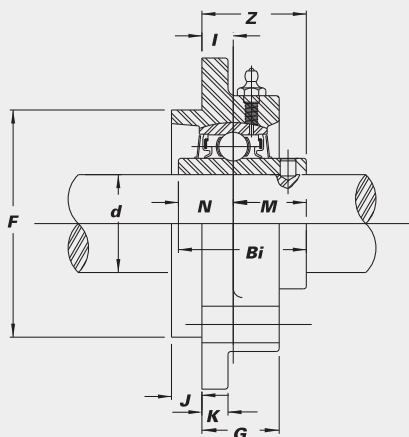

Unit No.	Shaft Dia.		Dimensions											(in.)	Bolt Used	Bearing No.	Housing No.	Weight (lbs.)	
	<i>d</i>		<i>A</i>	<i>P</i>	<i>S</i>	<i>J</i>	<i>K</i>	<i>G</i>	<i>F</i>	<i>I</i>	<i>Z</i>	<i>Bi</i>	<i>N</i>						<i>M</i>
	(in.)	(mm)																	
UCFCS 206-17 206-18 206 206-19 206-20	1 ¹ / ₁₆ 1 ¹ / ₈ 1 ³ / ₁₆ 1 ¹ / ₄ S	30	4 ³ / ₈ 111	3 ⁵ / ₈ 92	3 ³ / ₈ 9.5	15 ⁵ / ₆₄ 6.0	3 ³ / ₈ 9.5	15 ¹ / ₁₆ 24.0	3.000 76.2	25 ²⁵ / ₆₄ 10	1 ¹ / ₃₂ 32.2	1.5000 38.1	0.6260 15.9	0.8740 22.2	5 ⁵ / ₁₆	UC 206-17 206-18 206 206-19 206-20	FC X05	2.6	
UCFCS 207-20 207-21 207-22 207 207-23	1 ¹ / ₄ 1 ⁵ / ₁₆ 1 ³ / ₈ 1 ⁷ / ₁₆	35	5 127	4 ¹ / ₈ 104.8	15 ¹ / ₃₂ 12.0	3 ³ / ₈ 9.5	3 ³ / ₈ 9.5	7 ⁷ / ₈ 22.5	3.375 85.7	5 ⁵ / ₁₆ 8	1 ⁵ / ₁₆ 33.4	1.6890 42.9	0.6890 17.5	1.0000 25.4	3 ³ / ₈	UC 207-20 207-21 207-22 207 207-23	FC X06	3.3	
UCFCS 208-24 208-25 208	1 ¹ / ₂ 1 ⁹ / ₁₆	40	5 ¹ / ₄ 133	4 ³ / ₈ 111	15 ¹ / ₃₂ 12.0	7 ⁷ / ₁₆ 11.0	7 ⁷ / ₁₆ 11.0	1 ¹ / ₃₂ 26.0	3.625 92.1	23 ²³ / ₆₄ 9	1 ¹ / ₃₂ 39.2	1.9370 49.2	0.7480 19.0	1.1890 30.2	3 ³ / ₈	UC 208-24 208-25 208	FC X07	4.2	
UCFCS 209-26 209-27 209-28 209	1 ⁵ / ₈ 1 ¹¹ / ₁₆ 1 ³ / ₄	45	5 ¹ / ₄ 133	4 ³ / ₈ * 111	15 ¹ / ₃₂ 12.0	7 ⁷ / ₁₆ 11.0	7 ⁷ / ₁₆ 11.0	1 ¹ / ₃₂ 26.0	3.625* 92.1	23 ²³ / ₆₄ 9	1 ¹ / ₃₂ 39.2	1.9370 49.2	0.7480 19.0	1.1890 30.2	3 ³ / ₈	UC 209-26 209-27 209-28 209	FC X08	4.4	
UCFCS 210-30 210-31 210 210-32	1 ⁷ / ₈ 1 ¹⁵ / ₁₆ 2S	50	6 ³ / ₃₂ 155	5 ¹ / ₈ 130	35 ³⁵ / ₆₄ 14.0	15 ¹⁵ / ₃₂ 12.0	7 ⁷ / ₁₆ 11.0	1 25.0	4.250 108.0	5 ⁵ / ₁₆ 8	1 ¹⁹ / ₃₂ 40.6	2.0315 51.6	0.7480 19.0	1.2835 32.6	7 ⁷ / ₁₆	UC 210-30 210-31 210 210-32	FC X09	5.7	
UCFCS 211-32 211 211-35	2 2 ³ / ₁₆	55	6 ³ / ₈ 162	5 ³ / ₈ 136.5	35 ³⁵ / ₆₄ 14.0	5 ⁵ / ₈ 16.0	7 ⁷ / ₁₆ 11.0	1 25.0	4.500 114.3	9 ⁹ / ₃₂ 7	1 ¹⁹ / ₃₂ 40.4	2.1890 55.6	0.8740 22.2	1.3150 33.4	7 ⁷ / ₁₆	UC 211-32 211 211-35	FC X10	7.0	
UCFCS 212-36 212 212-38 212-39	2 ¹ / ₄ 2 ³ / ₈ 2 ⁷ / ₁₆	60	7 ³ / ₃₂ 180	6 152.4	5 ⁵ / ₈ 16.0	55 ⁵⁵ / ₆₄ 22.0	1 ¹ / ₂ 13.0	1 ¹ / ₃₂ 26.0	5.000 127.0	5 ⁵ / ₃₂ 4	1 ²³ / ₃₂ 43.7	2.5630 65.1	1.0000 25.4	1.5630 39.7	1 ¹ / ₂	UC 212-36 212 212-38 212-39	FC X11	9.5	
UCFCS 213-40 213	2 ¹ / ₂	65	7 ⁵ / ₈ 194	6 ¹ / ₂ 165	5 ⁵ / ₈ 16.0	25 ²⁵ / ₃₂ 20.0	9 ⁹ / ₁₆ 14.0	1 ⁵ / ₁₆ 33.0	5.500 139.7	7 ⁷ / ₁₆ 11	2 50.7	2.5630 65.1	1.0000 25.4	1.5630 39.7	1 ¹ / ₂	UC 213-40 213	FC X12	11.7	
UCFCS 214-43 214	2 ¹¹ / ₁₆	70	7 ⁵ / ₈ 194	6 ¹ / ₂ 165	5 ⁵ / ₈ 16.0	25 ²⁵ / ₃₂ 20.0	9 ⁹ / ₁₆ 14.0	1 ⁵ / ₁₆ 33.0	5.500 139.7	7 ⁷ / ₁₆ 11	2 ² / ₁₆ 55.4	2.9370 74.6	1.1890 30.2	1.7480 44.4	1 ¹ / ₂	UC 214-43 214	FC X13	12.5	

* Also available in FCF(209) style housing where P=5¹/₈, F=4.250.

See page 33.