



UCT Take Up Units

Wide slot, standard duty with set screw lock.

- Cast iron housing
- Wide inner race bearing
- Available with high temp. bearing - See page 46



- B-type seals
- L3-type seals available in some sizes



B-type Seal



L3-type Seal

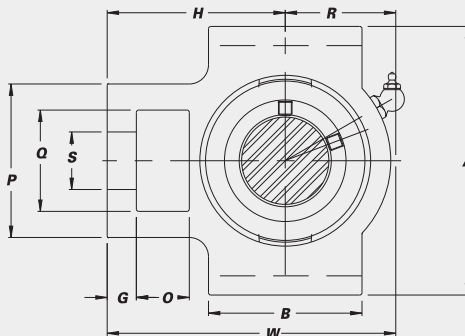

Unit No.	Shaft Dia.		Dimensions (in.) (mm)																Bearing No.	Housing No.	Weight (lbs.)	
	d																					
	(in.) (mm)	O	G	P	Q	S	B	k	E	A	W	J	L	R	H	Bi	N	M				
UCT 201		12																		UC 201		
201-8	1/2																			201-8		
202		15	5/8	13/32	2	1 1/4	3/4	2	17/32	3	3 1/2	3 11/16	1 1/4	13/16	1 5/16	2 13/32	1.2205	0.5000	0.7205	202	T 204	1.7
202-10	5/8		16	10	51	32	19	51	13.5	76.2	89	94	32	21	33	61	31.0	12.7	18.3	202-10		
203		17																		203		
204-12	3/4																			204-12		
204		20																		204		
UCT 205-14	7/8																			UC 205-14		
205-15	15/16		5/8	13/32	2	1 1/4	3/4	2	17/32	3	3 1/2	3 13/16	1 1/4	15/16	1 3/8	2 7/16	1.3386	0.5630	0.7756	205-15	T 205	1.9
205		25	16	10	51	32	19	51	13.5	76.2	89	97	32	24	35	62	34.0	14.3	19.7	205		
205-16	1																			205-16		
UCT 206-17	1 1/16																			UC 206-17		
206-18	1 1/8		5/8	13/32	2 7/32	1 15/32	55/64	2 1/4	17/32	3 1/2	4 1/32	4 7/16	1 15/32	1 3/32	1 11/16	2 3/4	1.5000	0.6260	0.8740	206-18	T 206	2.9
206		30	16	10	56	37	22	57	13.5	88.9	102	113	37	28	43	70	38.1	15.9	22.2	206		
206-19	1 3/16																			206-19		
206-20	1 1/4 S																			206-20		
UCT 207-20	1 1/4																			UC 207-20		
207-21	1 5/16		5/8	1/2	2 17/32	1 15/32	55/64	2 17/32	17/32	3 1/2	4 1/32	5 3/32	1 15/32	1 3/16	2	3 1/16	1.6890	0.6890	1.0000	207-21	T 207	3.5
207-22	1 3/8		16	13	64	37	22	64	13.5	88.9	102	129	37	30	51	78	42.9	17.5	25.4	207-22		
207		35																		207		
207-23	1 7/16																			207-23		
UCT 208-24	1 1/2		3/4	5/8	3 3/32	1 15/16	1 9/64	3 3/32	1 1/16	4	4 1/2	5 21/32	1 15/16	1 5/16	2 1/32	3 15/32	1.9370	0.7480	1.1890	UC 208-24		
208-25	1 9/16		19	16	83	49	29	83	17.5	101.6	114	144	49	33	56	88	49.2	19.0	30.2	208-25	T 208	5.5
208		40																		208		
UCT 209-26	1 5/8																			UC 209-26		
209-27	1 11/16		3/4	5/8	3 3/32	1 15/16	1 9/64	3 3/32	1 1/16	4	4 19/32	5 21/32	1 15/16	1 3/8	2 1/4	3 1/16	1.9370	0.7480	1.1890	209-27	T 209	5.5
209-28	1 3/4		19	16	83	49	29	83	17.5	101.6	117	144	49	35	57	87	49.2	19.0	30.2	209-28		
209		45																		209		
UCT 210-30	1 7/8																			UC 210-30		
210-31	1 15/16		3/4	5/8	3 3/32	1 15/16	1 9/64	3 3/8	1 1/16	4	4 19/32	5 7/8	1 15/16	1 15/32	2 5/16	3 17/32	2.0315	0.7480	1.2835	210-31	T 210	5.7
210		50	19	16	83	49	29	86	17.5	101.6	117	149	49	37	59	90	51.6	19.0	32.6	210		
210-32	2 S																			210-32		
UCT 211-32	2																			UC 211-32		
211-34	2 1/8		1	3/4	4 1/32	2 17/32	1 3/8	3 3/4	1 1/16	5 1/8	5 3/4	6 23/32	2 17/32	1 1/2	2 9/16	4 3/16	2.1890	0.8740	1.3150	211-34	T 211	8.8
211		55	25	19	102	64	35	95	27	130.2	146	171	64	38	65	106	55.6	22.2	33.4	211		
211-35	2 3/16																			211-35		
UCT 212-36	2 1/4																			UC 212-36		
212		60	1 1/4	3/4	4 1/32	2 17/32	1 3/8	4 1/32	1 1/16	5 1/8	5 3/4	7 5/8	2 17/32	1 21/32	2 15/16	4 11/16	2.5630	1.0000	1.5630	212	T 212	10.6
212-38	2 3/8		32	19	102	64	35	102	27	130.2	146	194	64	42	75	119	65.1	25.4	39.7	212-38		
212-39	2 1/16																			212-39		
UCT 213-40	2 1/2		1 1/4	13/16	4 3/8	2 3/4	1 39/64	4 3/4	1 1/16	5 15/16	6 9/16	8 13/16	2 3/4	1 23/32	3 7/16	5 13/32	2.5630	1.0000	1.5630	UC 213-40		
213		65	32	21	111	70	41	121	27	150.8	167	224	70	44	87	137	65.1	25.4	39.7	213	T 213	15.2
UCT 215-47	2 15/16		1 1/4	13/16	4 3/8	2 3/4	1 39/64	4 3/4	1 1/16	5 15/16	6 9/16	9 1/8	2 3/4	1 7/8	3 5/8	5 1/2	3.0630	1.3110	1.7520	UC 215-47		
215		75	32	21	111	70	41	121	27	150.8	167	232	70	48	92	140	77.8	33.3	44.5	215	T 215	15.9
215-48	3																			215-48		

Interchange Page 91