
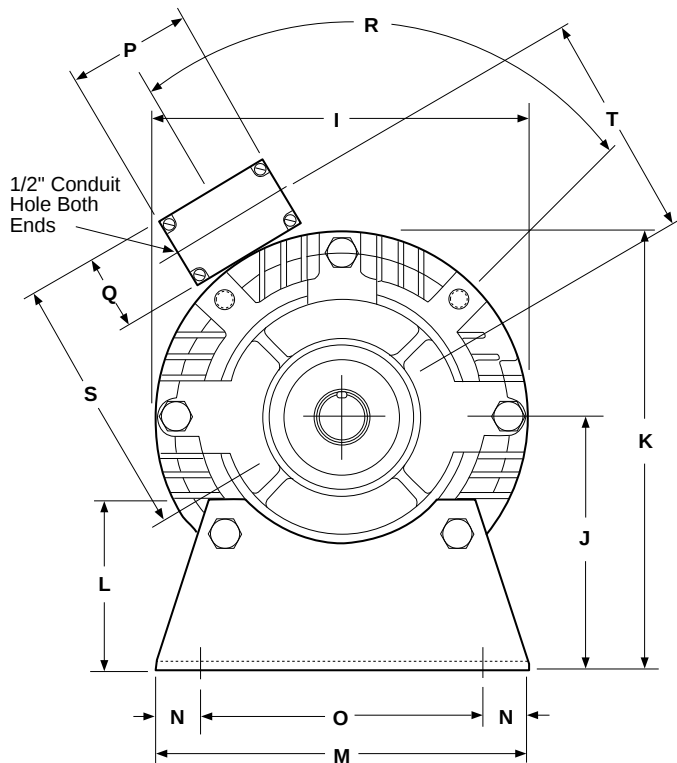


UM-2030 Input Clutch/Brake Combination

UM-2030-B Input Clutch/Brake Combination – Base Mounted

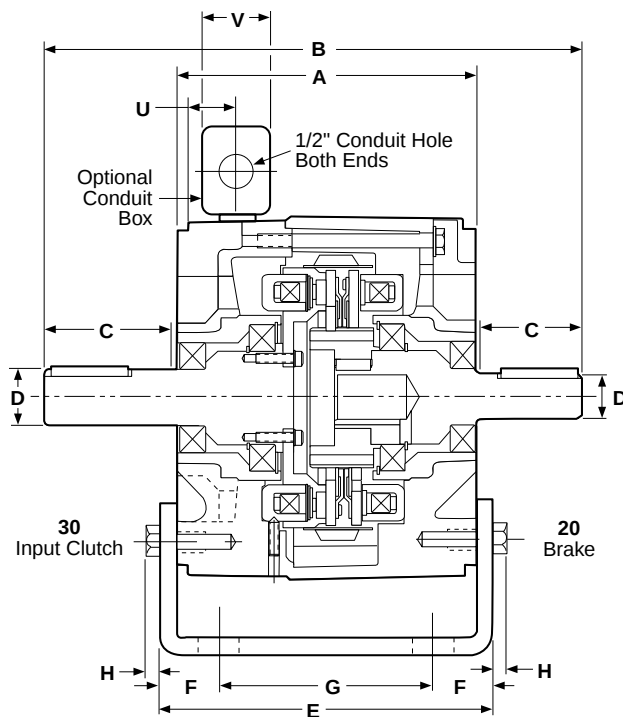

Note: Mounting base and conduit box are optional and are ordered separately.

All dimensions are nominal unless otherwise noted.

Size	A	B	C Min.	D	E	F	G	H	I	J	K	L	M
50	5.719	9.516	1.813	.625	5.672	.844	4.000	.344	6.688	3.500	6.844	2.000	6.000
100	5.719	9.516	1.890	.625	5.672	.844	4.000	.344	6.688	3.500	6.844	2.000	6.000
180	5.719	9.656	1.890	.875	5.672	.844	4.000	.344	6.688	4.500	7.844	3.000	6.625
210	7.719	12.969	2.500	1.125	8.203	1.094	6.000	.437	9.688	5.250	9.906	3.375	9.000
215	7.719	12.969	2.500	1.375	8.203	1.094	6.000	.437	9.688	5.250	9.906	3.375	9.000

Size	N	O	P	Q	R	S	T	U	V
50	.500	5.000	3.125	2.188	75°	5.531	4.438	1.125	2.203
100	.500	5.000	3.125	2.188	75°	5.531	4.438	1.125	2.203
180	.500	5.000	3.125	2.188	75°	5.531	4.438	1.125	2.203
210	.625	7.750	3.125	2.188	70°	6.859	5.766	1.625	2.203
215	.625	7.750	3.125	2.188	70°	6.859	5.766	1.625	2.203

Specifications

Model Size	Voltage DC	Static Torque lb. ft.	Max. RPM
50	6, 24, 90	16	3600
100	6, 24, 90	30	3600
180	6, 24, 90	30	3600
210	6, 24, 90	95	3600
215	6, 24, 90	95	3600