


For ¼" × 1" Fuses



Series 3828

Solder Terminals Fuseblock for ¼" × 1" Fuses

(6.4mm × 25.4mm)

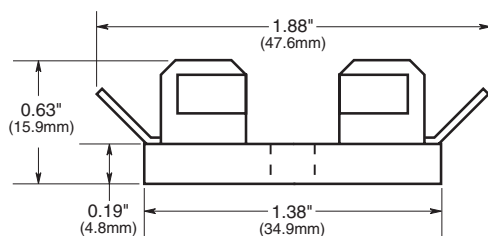

Catalog And Dimensional Data

Catalog Number	No. of Poles	*Base Length	
		inches	mm
3828-1	1	½	12.7
3828-2	2	1⅛	28.6
3828-3	3	1¾	44.5
3828-4	4	2⅞	60.3
3828-5	5	3	76.2
3828-6	6	3⅝	92.1
3828-7	7	4¼	108.0
3828-8	8	4⅞	123.8
3828-10	10	6⅛	155.6
3828-12	12	7⅞	187.3

*Small phenolic base, base width 1⅞" (34.9mm)

Note—Mounting screw hole diameter is 0.147" (3.7mm) Max. Mounting Screw No. 6.




4520 and 4393

Single Pole Fuseblock for ¼" × 1" Fuses

Bakelite base; Width ½" (12.7mm). Spring-bronze, bright tin-lead plated clips. Rated 30A, 250V.

No. 4520—Solder terminals; straight; integral clip and terminal.

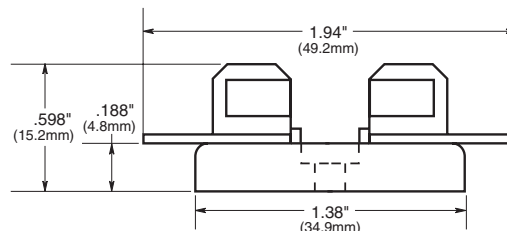

No. 4393—Spare fuseblock.

Note—Mounting screw hole diameter is 0.147" (3.7mm), counterbore 0.636" (8.0mm) diameter. Max. Mounting Screw No. 6.

