


The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 9103PP, Fafnir® Deep Groove Ball Bearings (9100K, 200K, 300K)

Radial ball bearings consist of an inner and outer ring with a cage containing a complement of precision balls. The standard Conrad-type bearing has a deep-groove construction capable of handling radial and axial loads from either direction in versatile designs that permit relatively high-speed operation.

In addition to standard single-row deep groove bearings, Timken offers special designs, including a maximum capacity series and an extra large (XLS) radial series bearing.

Size range: 3 mm


[more](#)

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#) | [Factors](#) | [Abutment and Fillet Dimensions](#)

Specifications

Design Units	Metric
d - Bore	17 mm
Ball Type	STEEL
Manufacturing Part Number	P9103PP Z5 FS50000

Dimensions



D - Outer Diameter	35 mm 1.378 in
Bearing Width	10 mm 0.3937 in

Basic Load Ratings

Ce - Dynamic Radial Rating¹	6660 N 1500 lbf
C0 - Static Radial Rating	3250 N 730 lbf

Factors

Limiting Speed (Grease)	11561 rpm
Limiting Speed (Oil)	13488 rpm


Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius²	0.3 mm 0.012 in
r - Outer Ring "To Clear" Radius³	0.3 mm 0.012 in
da - Inner Ring Backing Diameter	19.05 mm 0.750 in
Da - Outer Ring Backing Diameter	33.02 mm 1.3000 in

¹ Based on 10^6 revolutions of calculated fatigue life.

² Maximum housing fillet radius that bearing corners will clear.

³ Maximum shaft fillet radius that bearing corners will clear.

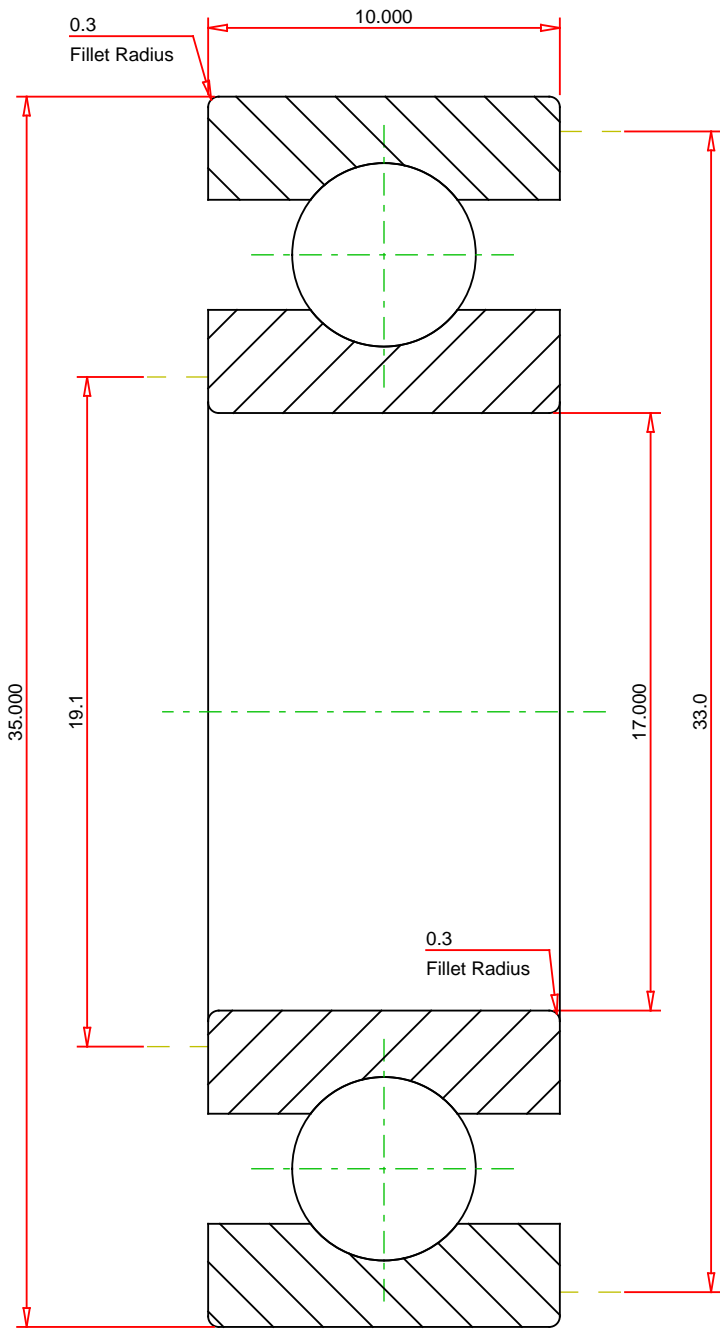

METRIC UNITS

Number of Balls Per Row	10
Bearing Weight	0.041 kg

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

9103PP	
Fafnir® Deep Groove Ball Bearings (9100K, 200K, 300K)	
Dynamic Radial Rating	6660 N
Static Radial Rating	3250 N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY