

Project:

Type:

Prepared By:

Date:



Features and Benefits

Replacement for traditional Metal Halide or High Pressure Sodium HID Lamps

Produces 10% uplight

Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Rated for use in enclosed and open fixtures in dry or damp locations

4kV surge protection built in

50,000 hour Lifespan

Environmentally friendly, no mercury used

UL Listed, UL Classified, DLC Listed

5 Year No Compromise Warranty

Lamp includes on board low-voltage AUX port for lamp level sensor accessories

Compatible with RAB specified 0-10V dimming system

Technical Specifications			
<b>Performance</b>		<b>LED Characteristics</b>	<b>Input Voltage:</b>
<b>Product Type:</b> HID Replacement		<b>Color Temperature:</b> 5000K Daylight	100-277V
<b>Input Wattage:</b> 60W		<b>Color Accuracy (CRI):</b> 80 CRI	<b>Operating Frequency:</b> 50/60Hz
<b>Wattage Equivalency:</b> 200W HID		<b>Installation</b>	<b>Input Current @ 120V:</b> 0.67mA
<b>Lumens:</b> 8,000lm		<b>Base Type:</b> EX39	<b>Flicker:</b> <30%
<b>Efficacy:</b> 133lm/W		<b>Installation Type:</b> Type B, Ballast Bypass	<b>Other</b>
<b>L70 Lifespan:</b> 50,000 Hours		<b>Installation Orientation:</b> Vertical	<b>Warranty:</b> RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="http://rablighting.com/warranty">rablighting.com/warranty</a> .
<b>Dimming:</b> Compatible with RAB specified 0-10V dimming system. Dimming capabilities were tested and verified on Legrand RH4FBL3PTC 0-10V dimming system.		<b>Electrical</b>	<b>Compliance</b>
<b>Construction</b>		<b>THD:</b> <20%	<b>UL Listed:</b> Yes
		<b>Power Factor:</b> >0.9	
		<b>Operating Temperature:</b> -30°C to 60°C	

**Bulb Shape:**  
High Bay

Technical Specifications (continued)

UL Classified:  
Yes

Certification Model Number:  
H20008

California Energy Commission (CEC) Status:  
Lawful for Sales in California

DLC Listed:  
This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: PL5K5DOYTP40

\


Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
8	1

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	15.4	15.4	9
PALLET	30	32.7	32.7	39.8

Wiring Diagram

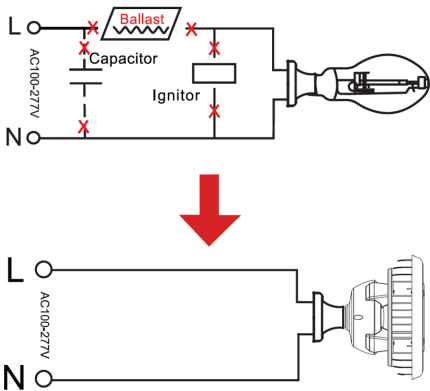

Dimension

Light Distribution

