



Sheaves


2B/SPLIT TAPER

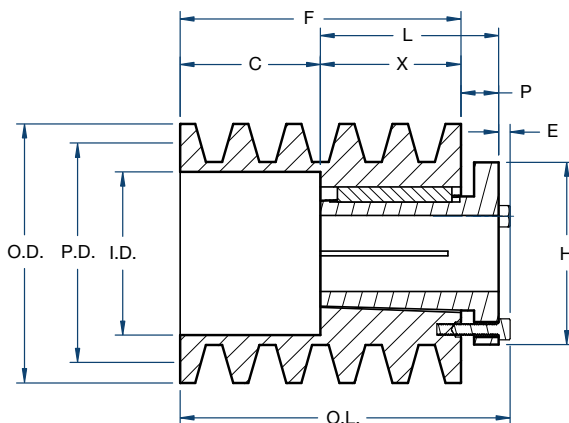

BLACKSTAR®



Type 5

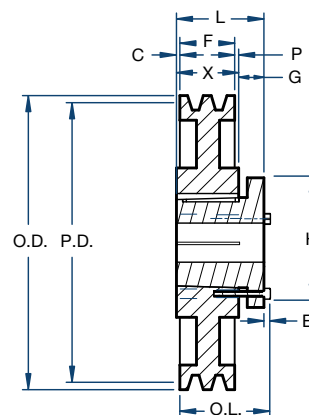

Type 16

Part Number		Diameter (in)			Type	Dimensions (in)									Weight less Bushing (lbs)
Sheave	Bushing	Pitch A	Pitch B	Outside		O.L.	L	P	C	H	F	G	X	E	
2B54Q	Q1	5.0	5.4	5.75	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	6.0
2B56Q	Q1	5.2	5.6	5.95	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	7.3
2B58Q	Q1	5.4	5.8	6.15	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	7.9
2B60Q	Q1	5.6	6.0	6.35	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	8.9
2B62Q	Q1	5.8	6.2	6.55	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	9.4
2B64Q	Q1	6.0	6.4	6.75	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	10.1
2B66Q	Q1	6.2	6.6	6.95	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	11.1
2B68Q	Q1	6.4	6.8	7.15	5	2-25/32	2-1/2	3/4	0	4-1/8	1-3/4	—	1-3/4	9/32	12.3
2B154R	R1	15.0	15.4	15.75	16	3-5/32	2-7/8	1	1/8	5-3/8	1-3/4	7/8	2	9/32	30.6
2B160R	R1	15.6	16.0	16.35	16	3-5/32	2-7/8	1	1/8	5-3/8	1-3/4	7/8	2	9/32	32.0
2B184R	R1	18.0	18.4	18.75	16	3-5/32	2-7/8	1	1/8	5-3/8	1-3/4	7/8	2	9/32	39.1
2B200R	R1	19.5	20.0	20.35	16	3-5/32	2-7/8	1	1/8	5-3/8	1-3/4	7/8	2	9/32	43.5
2B250R	R1	24.5	25.0	25.35	16	3-5/32	2-7/8	1	1/8	5-3/8	1-3/4	7/8	2	9/32	58.0
2B300R	R1	29.5	30.0	30.35	16	3-5/32	2-7/8	1	1/8	5-3/8	1-3/4	7/8	2	9/32	81.0
2B380R	R1	37.5	38.0	38.35	16	3-5/32	2-7/8	1	1/8	5-3/8	1-3/4	7/8	2	9/32	92.0