

M-10550 | 1

TOGGLE DIMMER CONTROLS

SINGLE POLE CATALOG NO.	THREE-WAY CATALOG NO.	COLOR	RATING
RAY10PAL	RAY103PAL	ALMOND	1000W 120V AC
RAY10PI	RAY103PI	IVORY	
RAY10PLA	RAY103PLA	LIGHT ALMOND	
RAY10PW	RAY103PW	WHITE	
RAY600PAL	RAY603PAL	ALMOND	600W 120V AC
RAY600PI	RAY603PI	IVORY	
RAY600PLA	RAY603PLA	LIGHT ALMOND	
RAY600PW	RAY603PW	WHITE	


FEATURES:

1. ELECTROSTATIC DISCHARGE PROTECTION
2. MECHANICAL AIR-GAP SWITCH TO DISCONNECT LOAD POWER
3. DERATING REQUIRED IF GANGED
4. UL LISTED & CSA CERTIFIED

TOGGLE FAN SPEED CONTROLS

SINGLE POLE CATALOG NO.	COLOR	RATING
RAYFSQFAL	ALMOND	1.5A 120V AC
RAYFSQFI	IVORY	
RAYFSQFLA	LIGHT ALMOND	
RAYFSQFW	WHITE	300W 1.5A 120V AC
+RAY2LFSQAL	ALMOND	
+RAY2LFSQI	IVORY	
+RAY2LFSQLA	LIGHT ALMOND	
+RAY2LFSQW	WHITE	

+ FAN/LIGHT CONTROLS REQUIRE TWO SWITCHED HOT WIRES BETWEEN CONTROL AND THE FAN/LIGHT. FAN CONTROLS ARE LEADED WITH #14 AWG WIRE.

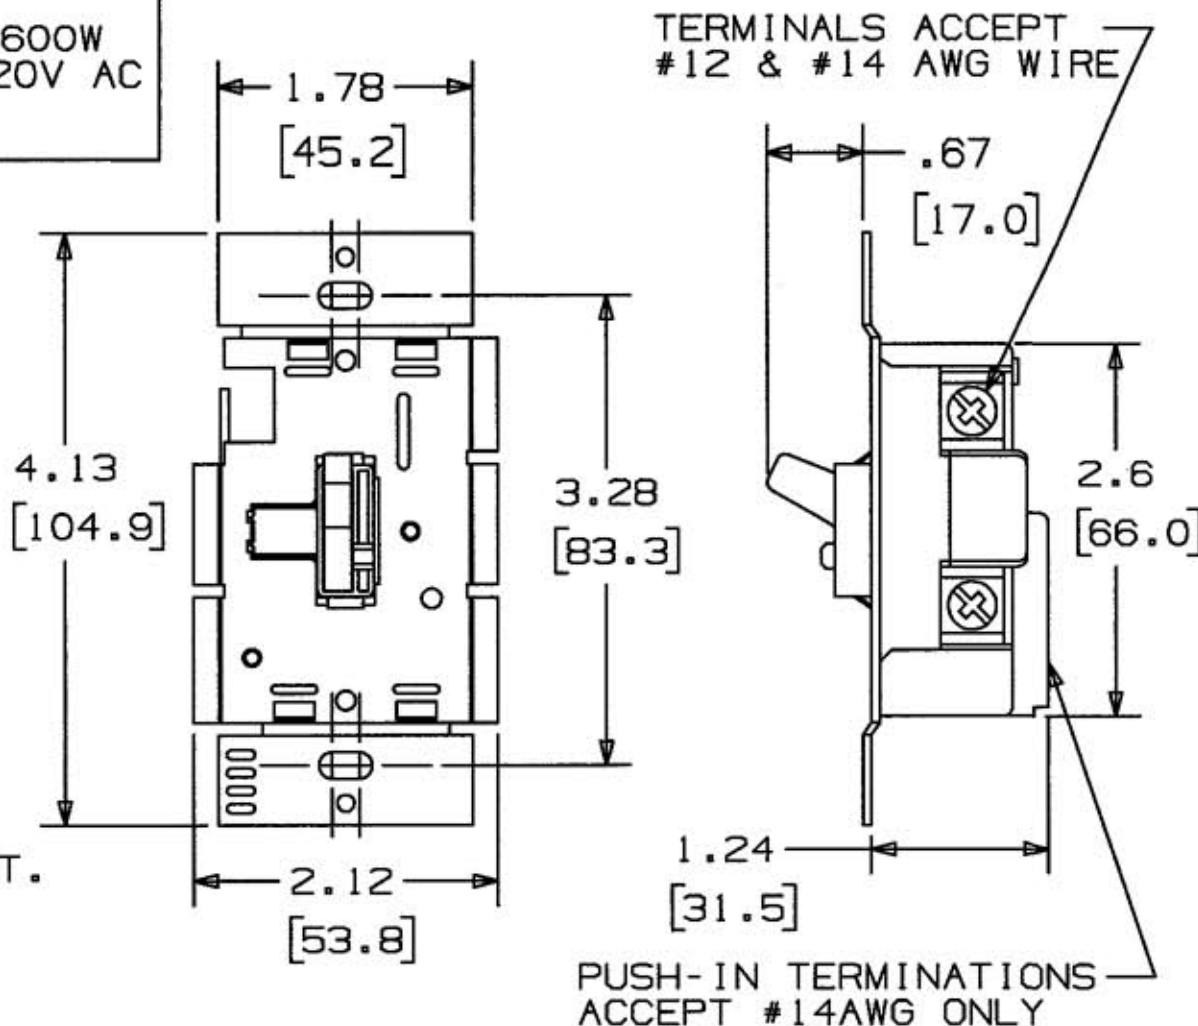

DERATING CHART

SINGLE GANG	2-GANG	3-GANG
600W	500W	300W
1000W	800W	650W
300W	250W	200W
600VA (450W)	500VA (400W)	400VA (300W)
1.5A	1.5A	1.5A
1.5A/300W	1.5A/300W	1.5A/300W

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
TOGGLE	PLASTIC	SEE TABLE
BASE	PLASTIC	BLACK
SLIDE	PLASTIC	SEE TABLE
HEAT SINK	ALUMINUM	

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE  NON-REPAIRABLE

B

M-10550

1


1	RELEASED PER DCN 13786	ZOK	02/15/07
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE  
TOGGLE DIMMERS & FAN CONTROLS

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
	DR. BY AMZ	APP. BY ZOK
	TR. BY	SCALE NONE
	CHK'D BY ZOK	DATE 12/30/06