




ISOSTATIC
LEADERS IN BRONZE BEARINGS...and MORE

Isostatic Industries, Inc.
4153 North Kostner Avenue
Chicago, IL 60641
Toll Free: 800.621.5500
Phone: 773.286.3444
Fax: 773.282.3323
Email: info@isostatic.com

Item # 701191, TU® Steel-Backed PTFE Lined Sleeve Bearings - METRIC

Isostatic TU® Sleeve Bearings

- Standard stock products
- Self-lubricating dry sliding bearing
- A steel-backed composite material comprised of:
 - Low carbon steel backing for extremely high load capacity-.50 – 2.7mm thick
 - Sintered bronze offers optimal heat dispersion –.20 - .35 mm thickness and
 - PTFE – lead sliding surface creates a low friction coefficient and allows for a wide temperature range – thickness .2 mm
- Can be used where many liquid lubricants fail; also performs well with lubrication

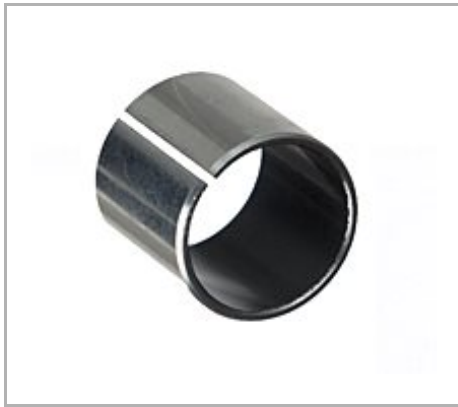

[+ more](#)

[Description](#) | [Specifications](#) | [Dimensions](#) | [Tolerances](#) | [Performance Data](#)

Description

Detailed Description

160 MM I.D. x 165 MM O.D. x 80 MM Length, TU, Steel Back, PTFE & Pb Lined Composite, Sleeve Bearing, Metric

Specifications

Catalog Number	M16080TU
Interchange #	16080DU MB16080DU PAP 16080 P10
Unit of Measure	Each
Material	Steel-Backed PTFE Lined

Material Standard	Steel-Backed PTFE Lined
--------------------------	-------------------------

Avg Unit Weight	1.6810 lb
------------------------	-----------

UPC Code	00846802069582
-----------------	----------------

Dimensions

Nominal Inner Diameter	160 mm
-------------------------------	--------

Nominal Outer Diameter	165 mm
-------------------------------	--------

Nominal Length	80 mm
-----------------------	-------

Recommended Shaft Size	159.937 to 160.000 mm
-------------------------------	-----------------------

Recommended Housing Bore	165.000 to 165.040 mm
---------------------------------	-----------------------

Tolerances

Overall Length Tolerance	±.25 mm
---------------------------------	---------

Performance Data

Load - P Max Value	36,250 lb/in ²
---------------------------	---------------------------

Speed - V Max Value	1,900 ft ² /min
----------------------------	----------------------------

Load at Speed - PV Max Value (P.S.I. / S.F.M.)	102,000
---	---------