


Climax Metal Products Company

8141 Tyler Boulevard
Mentor, Ohio 44060
USA

Toll free: 800-542-6552

Phone: 440-585-0300

Fax: 800-860-5553

Email: sales@climaxmetal.com

Website: www.climaxmetal.com

ITEM # C732M-68, SERIES C732 SHRINK DISC

Heavy-duty Shrink Disc external clamping device.


[View Catalog Page](#)



[Drawing](#) | [Specifications](#) |

Drawing


Dimensional Drawing

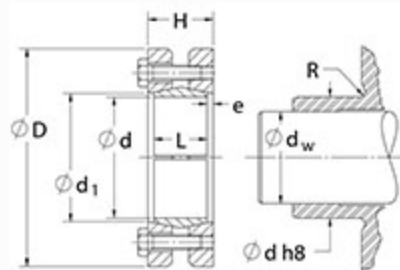

Shrink Disc

Specifications

d	2.677 in
D	4.724 in
dw-min	1.875 in
dw-max	2.193 in
M_t for dw-min	2877 ft-lbs
M_t for dw-max	4193 ft-lbs
F_{ax} for dw-min	36832 lbs.F
F_{ax} for dw-max	45893 lbs.F
Locking Screws Quantity	8
Locking Screws Size	M8 x 35
M_a-Locking Screws	22 ft-lbs
L	1.181 in
H	1.535 in
e	0.177 in
d1	2.834 in
R	3/32 in
Tw¹	0.0020 in
Th²	+ 0 / - 0.0018 in
Weight	3.000 lb
UPC Code	044861039779



[Catalog Page](#)

Downloads[Installation & Removal Instructions](#)[Installation Demonstration \(Video\)](#)[Keyless Locking Technical Information](#)**Competitor Part Number****Alternate Part Number**

104997352

7569564

H0683

¹ Max. Diametrical Clearance between Shaft and Hub Bore

² Hub Outer Diameter Tolerance