

Metric Sprockets




Taper Lock Bushed Type TL

ISO 12B, DIN 8187 - ISO/R 606

Single, Double, Triple

Standard and Hardened Teeth

Material: Steel C45 E

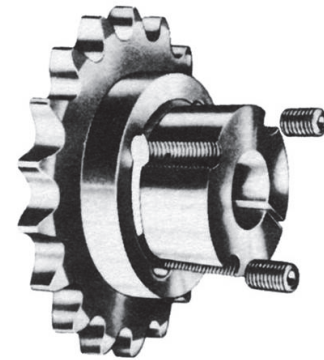

Models Available

Drawing Dimensions	Sprocket Sizes
	12B
h1	11.1
h2	30.3
h3	49.8
L	10.8


Part No: 12B-21HTL-2517

12B = Chain Size

21 = Number of Teeth

H = Hardened Teeth

TL-2517 = TL Bushing Size

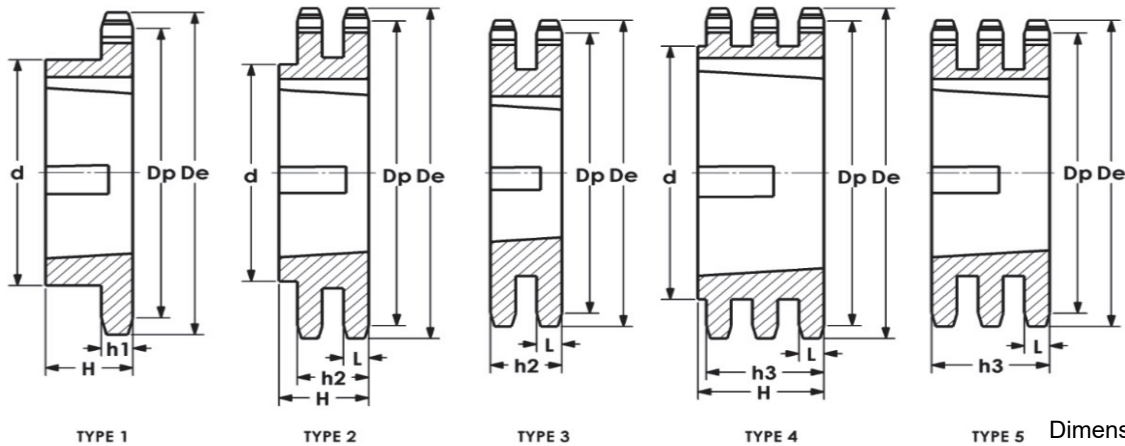

Dimensions in mm

Chain Size 3/4" x 7/16"	Teeth	De	Dp	Single				Double				Triple					
				Part No.	Type	d	H	Part No.	Type	d	H	Part No.	Type	d	H		
12B	13	87.5	79.59	12B-13HTL-1210	1	60	25	—	—	—	—	—	—	—	—	—	—
	14	93.6	85.61	12B-14TL-1610	1	70	25	—	—	—	—	—	—	—	—	—	—
	15	99.8	91.63	12B-15HTL-1610	1	70	25	12B-2-15TL-1610	3	—	30.3	12B-3-15TL-1615	5	—	49.8	—	—
	16	105.5	97.65	12B-16TL-1610	1	75	25	12B-2-16TL-1610	3	—	30.3	—	—	—	—	—	—
	17	111.5	103.67	12B-17HTL-1610	1	76	25	12B-2-17TL-1610	3	—	30.3	12B-3-17TL-2012	5	—	49.8	—	—
	18	118.0	109.71	12B-18TL-2012	1	90	32	12B-2-18TL-2012	2	90	32	—	—	—	—	—	—
	19	124.2	115.75	12B-19HTL-2012	1	90	32	12B-2-19TL-2012	2	90	32	12B-3-19TL-2012	5	—	49.8	—	—
	20	129.7	121.78	12B-20TL-2012	1	90	32	12B-2-20TL-2517	2	108	45	—	—	—	—	—	—
	21	136.0	127.82	12B-21HTL-2517	1	102	45	12B-2-21TL-2517	2	108	45	12B-3-21TL-2517	5	—	49.8	—	—
	22	141.8	133.86	12B-22TL-2517	1	102	45	12B-2-22TL-2517	2	108	45	—	—	—	—	—	—
	23	149.0	139.90	12B-23HTL-2517	1	108	45	12B-2-23TL-2517	2	108	45	12B-3-23TL-2517	5	—	49.8	—	—
	24	153.9	145.94	12B-24TL-2517	1	108	45	12B-2-24TL-2517	2	108	45	—	—	—	—	—	—
	25	160.0	152.00	12B-25HTL-2517	1	108	45	12B-2-25TL-2517	2	108	45	12B-3-25TL-2517	5	—	49.8	—	—
	26	165.9	158.04	12B-26TL-2517	1	108	45	12B-2-26TL-2517	2	108	45	—	—	—	—	—	—
	27	172.3	164.00	12B-27HTL-2517	1	108	45	12B-2-27TL-2517	2	108	45	12B-3-27TL-3020	4	140	51	—	—
	28	178.0	170.13	12B-28TL-2517	1	108	45	12B-2-28TL-2517	2	108	45	—	—	—	—	—	—
	30	190.5	182.25	12B-30HTL-2517	1	108	45	12B-2-30TL-2517	2	108	45	12B-3-30TL-3020	4	140	51	—	—
	38	239.0	230.69	12B-38TL-2517	1	108	45	12B-2-38TL-3020	2	140	51	12B-3-38TL-3020	4	140	51	—	—
	45	282.5	273.10	12B-45TL-2517	1	108	45	12B-2-45TL-3020	2	140	51	12B-3-45TL-3020	4	140	51	—	—
	57	355.4	345.81	12B-57TL-2517	1	108	45	12B-2-57TL-3020	2	140	51	12B-3-57TL-3020	4	140	51	—	—
76	469.9	460.99	12B-76TL-2517	1	108	45	12B-2-76TL-3020	2	140	51	12B-3-76TL-3020	4	140	51	—	—	
95	585.1	576.17	12B-95TL-2517	1	108	45	12B-2-95TL-3020	2	140	51	—	—	—	—	—	—	
114	700.6	691.36	12B-114TL-2525	1	108	64	—	—	—	—	—	—	—	—	—	—	

Note: Shaded items with "H" in Part No. indicates Hardened Teeth.