

SPZ Metric V-Belt Sheaves - Taper Bushed



Models Available



Fig 1

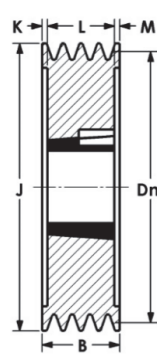


Fig 4

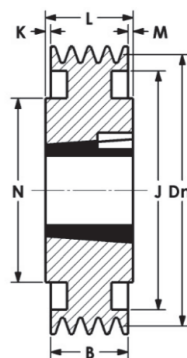


Fig 5

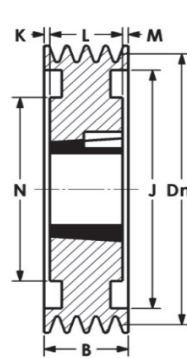


Fig 6

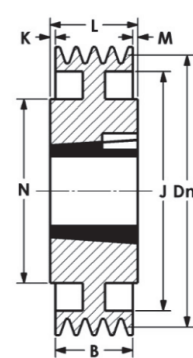


Fig 7




Fig 8

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPZ190 x 1-1610	190	1	1610	42	1	16	—	—	25	9	92	1.8
SPZ190 x 2-2012		2	2012	50	1	28	—	—	32	4	112	2.6
SPZ190 x 3-2012		3	2012	50	6	40	161	—	32	8	112	4.9
SPZ190 x 4-2517*		4	2517	65	6	52	161	—	45	7	124	5.3
SPZ190 x 5-2517*		5	2517	65	6	64	161	—	45	19	124	6.3
SPZ190 x 6-2517*		6	2517	65	6	76	161	—	45	31	124	6.9
SPZ190 x 8-3020		8	3020	75	4	100	161	24.5	51	24.5	—	8.2
SPZ200 x 1-2012	200	1	2012	50	7	16	—	—	32	16	112	2.3
SPZ200 x 2-2012		2	2012	50	7	28	—	—	32	4	112	2.8
SPZ200 x 3-2012		3	2012	50	6	40	171	—	32	8	112	3.5
SPZ200 x 4-2517*		4	2517	65	6	52	171	3.5	45	3.5	124	4.7
SPZ200 x 5-2517*		5	2517	65	6	64	171	9.5	45	9.5	124	5.5
SPZ200 x 6-2517*		6	2517	65	6	76	171	15.5	45	15.5	124	6.1
SPZ200 x 8-3020		8	3020	75	4	100	171	24.5	51	24.5	—	9.3
SPZ224 x 1-2012	224	1	2012	50	5	16	195	8	32	8	112	2.5
SPZ224 x 2-2012		2	2012	50	5	28	195	2	32	2	112	3.2
SPZ224 x 3-2012		3	2012	50	6	40	195	4	32	4	112	3.9
SPZ224 x 4-2517*		4	2517	65	8	52	195	3.5	45	3.5	124	5.2
SPZ224 x 5-2517*		5	2517	65	6	64	195	9.5	45	9.5	124	6.0
SPZ224 x 6-2517*		6	2517	65	6	76	195	15.5	45	15.5	124	6.6
SPZ224 x 8-3020		8	3020	75	4	100	195	24.5	51	24.5	—	11.8
SPZ250 x 1-2012	250	1	2012	50	7	16	221	8	32	8	112	2.8
SPZ250 x 2-2012		2	2012	50	7	28	221	2	32	2	112	3.5
SPZ250 x 3-2012		3	2012	50	8	40	221	4	32	4	112	4.3
SPZ250 x 4-2517*		4	2517	65	8	52	221	3.5	45	3.5	124	5.7
SPZ250 x 5-2517*		5	2517	65	8	64	221	9.5	45	9.5	124	6.4
SPZ250 x 6-2517*		6	2517	65	8	76	221	15.5	45	15.5	124	7.0
SPZ250 x 8-3020		8	3020	75	8	100	221	24.5	51	24.5	145	10.5
SPZ280 x 1-2012	280	1	2012	50	7	16	251	8	32	8	112	2.9
SPZ280 x 2-2012		2	2012	50	7	28	251	2	32	2	112	4.0
SPZ280 x 3-2517*		3	2517	65	7	40	251	2.5	45	2.5	124	5.3
SPZ280 x 4-2517*		4	2517	65	8	52	251	3.5	45	3.5	124	6.4
SPZ280 x 5-2517*		5	2517	65	8	64	251	9.5	45	9.5	124	7.1
SPZ280 x 6-2517*		6	2517	65	8	76	251	15.5	45	15.5	124	7.8
SPZ280 x 8-3020		8	3020	75	8	100	251	24.5	51	24.5	145	10.8

Note: * Requires bushing with BSW threads.