



Hammond  
Power Solutions


GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX



DRY TYPE  
TRANSFORMER  
77JUS  
E112313  
**LISTED**

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM011JCCN
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	11
	483 460 437	13.1 13.8 14.5	105 100 95	1-2 2-3 3-4	TYPE	K
	230Y/133V				Cooling Refroidissement	ANN
LV/BT					Temp. Rise Echauffement	130 °C
BIL	-				Temp. Class Classe de Temp.	200 °C
TERM. BORNES	X0 X1 X2 X3				Frequency Fréquence	60 Hz
					Impédance % @ 150 °C	4.5
					Encl. Type Type de boîtier	3R
					Wt Poids lbs/kg	160/73
					Winding Enroulement	CU

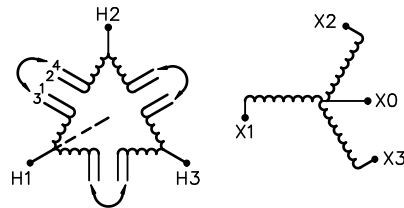

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES

d003102b



Hammond Power  
Solutions Inc.


TITLE: 3PH DRIVE TRANSFORMER  
NAMEPLATE INFORMATION

5	21/07/16	PP	EDB UPDATE	DES: MBURSAC
4	15/04/20	ME	HCN: 44319	DATE: 03/10/31
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM011JCCN

5.0 wed 19/07/2010 14:52

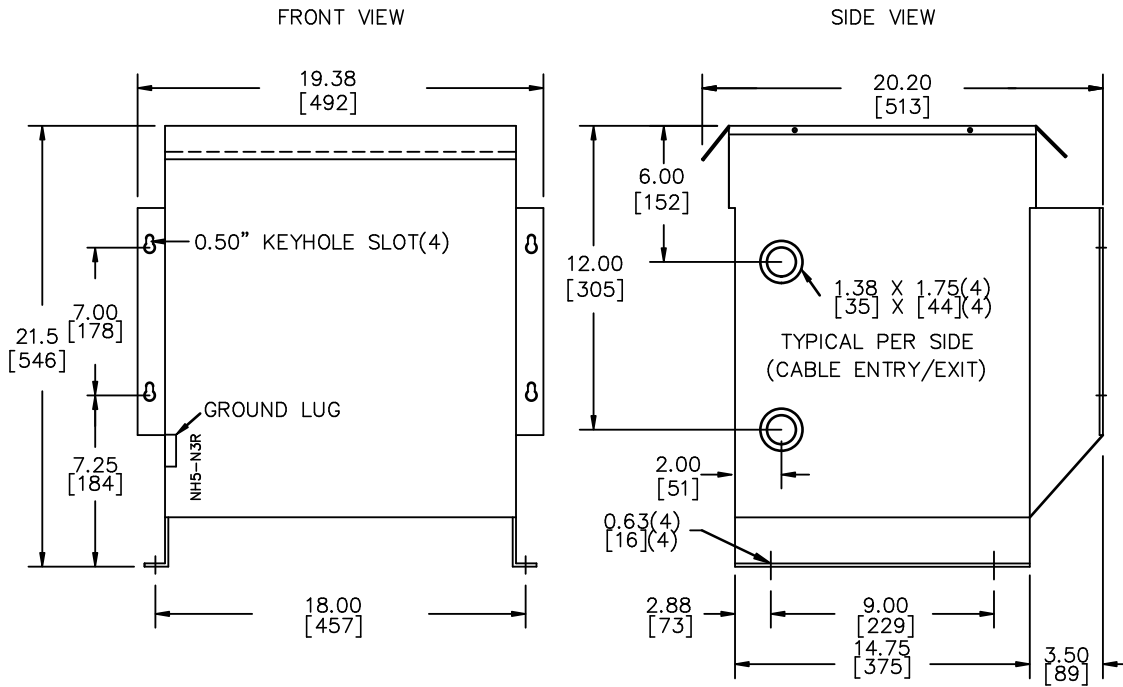

All Dimensions in inches[mm]

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR.

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

SUITABLE FOR #14-4 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT BOTTOM FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

5	21/07/16	PP	EDB UPDATE	DES: MBURSAC
4	15/04/20	ME	HCN: 44319	DATE: 03/10/31
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM011JCCN

5.0 Wed 20/07/16 14:52