



Hammond
Power Solutions


GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX



LR 3902
DRY TYPE
TRANSFORMER
77JUS
E112313
LISTED

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM063JCC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	63
	483 460 437	75.3 79.1 83.2	105 100 95	1 2 3	TYPE	K
	230Y/133V				LV/BT	
	-				BIL	
TERM. BORNES	X0 X1 X2 X3				Wt Poids lbs/kg	550/250
					Encl. Type Type de boîtier	3R
					Winding Enroulement	CU
					Cooling Refroidissement	ANN
					Temp. Rise Echauffement	150 °C
					Temp. Class Classe de Temp.	220 °C
					Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	4.7

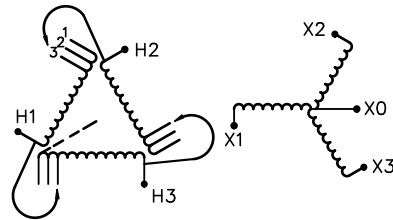

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d003102b



Hammond Power
Solutions Inc.



TITLE: 3PH DRIVE TRANSFORMER
NAMEPLATE INFORMATION

4	21/07/16	PP	EDB UPDATE	DES: EBULIN
3	15/07/08	ME	HCN: 60358	DATE: 00/07/27
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM063JCC

4.0 Jwen 16/07/2021 15:03

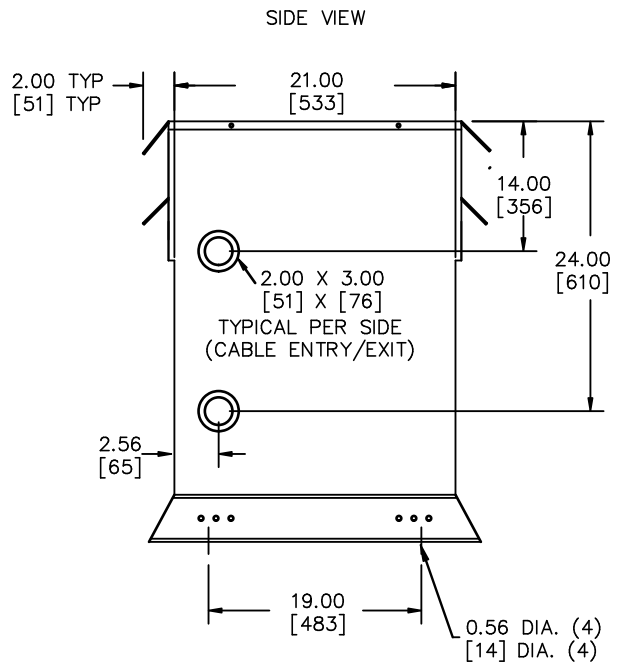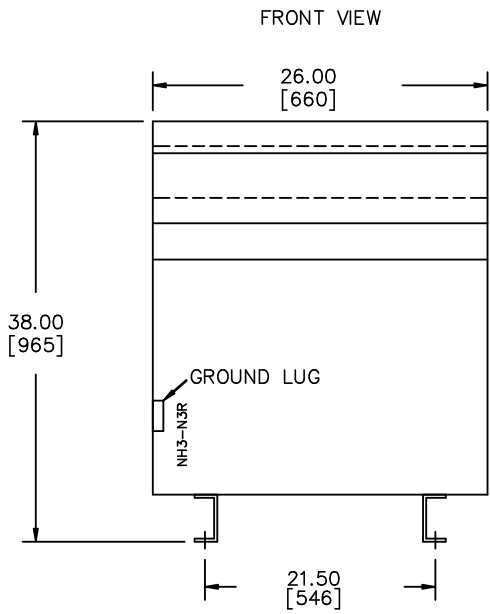

All Dimensions in inches[mm]

ENCLOSURE COLOR :ANSI 61 GREY- OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER					
4	21/07/16	PP	EDB UPDATE	DES: EBULIN	SHEET 2 OF 2
3	15/07/08	ME	HCN:60358	DATE: 00/07/27	
NO.	DATE	BY	REVISION	SCALE: NTS	

EDBDM063JCC
 4.0 Jwen 2021/07/16 15:03