

Scheduling Devices
Count Down
Wall Switch Timers



Features

- 30 minute timer
- Pre-set 5 button selection with permanent time markings
- Manual override to OFF
- Alert to OFF function - red LED will flash during the final 30 seconds
- Designed for use on 120 or 277V AC circuits



Ordering Information


Description	UPC Number	Catalog Number
Count down timer wall switch; settings: OFF, 5, 10, 20, 30 minutes	783585256405	DT5030I

Listings

cULus listed to UL60730-1 and UL60730-2
 Meets ASHRAE 90.1, and GEC Title 24 compliant

Specifications

Housing	Polycarbonate
Mounting Bracket	Aluminum
Wire Leads	6" 14AWG copper wire
Mounting Strap	Steel

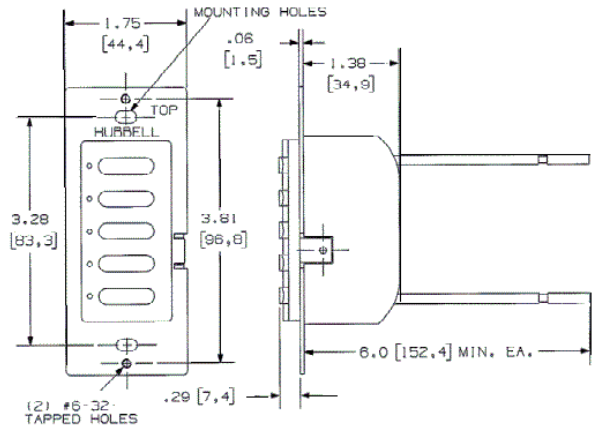

Performance

Controls	
5 button selection	Preset time selection
LED Indicators	Illuminates once time is selected
OFF Switch	6 seconds to 20 minutes (default set to 10 minutes)

Electrical	
Load Capacity	120VAC, 600W Incandescent, 5A Ballast, 5A CFL/LED, 277V; Horsepower rating 1/6

Environmental	
Operating Temperature	32°F to 122°F (0°C to 50°C) with rate of change not exceeding 20°F(11°C) per hour
Storage	-40°F to 150°F (-40°C to 65°C); 20% to 90% non condensing relative humidity

Complementary Products

Nylon Wallplate	NP26I
SS Wallplate	SS26
Snap-On Wallplate	NPS26I

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

