




The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number UCT207, UCT 200 Take-Up Mounted Bearings - Set Screw Locking

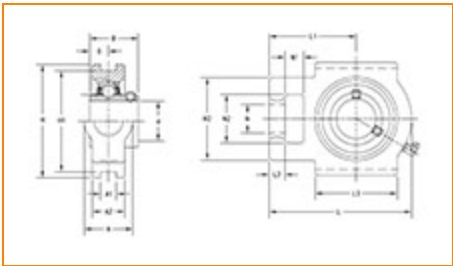

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)


Specifications	
Bearing Number	UC207
Shaft Size d	35 mm
UPC Code	087796076235
Locking Style	Set Screw Locking
Housing Construction	Take-Up

Dimensions	
Housing Width A	37 mm 1.457 in





Slot Width A1	12 mm 0.472 in
Socket Width A2	30 mm 1.181 in
Total Height H	102 mm 4.016 in
Pitch Height H1	89 mm
Height H2	64 mm
Total Length L	129 mm 5.079 in
Shaft Length L1	78 mm 3.071 in
Dimension L2	13 mm
Slot Length L3	64 mm 2.531 in
Adjustment Screw Bore N	22 mm 0.866 in
Opening Width N1	16 mm 0.625 in
Opening Height N2	37 mm 1.469 in
Inner Ring Width B	42.9 mm 1.689 in
Center of Bearing from End S	17.5 mm 0.689 in
Grease Nipple Size	A-1/4-28UNF

Basic Load Ratings



Static Load Rating	15400 N 3462 lbf
---------------------------	---------------------

Dynamic Load Rating	25700 N 5778 lbf
----------------------------	---------------------

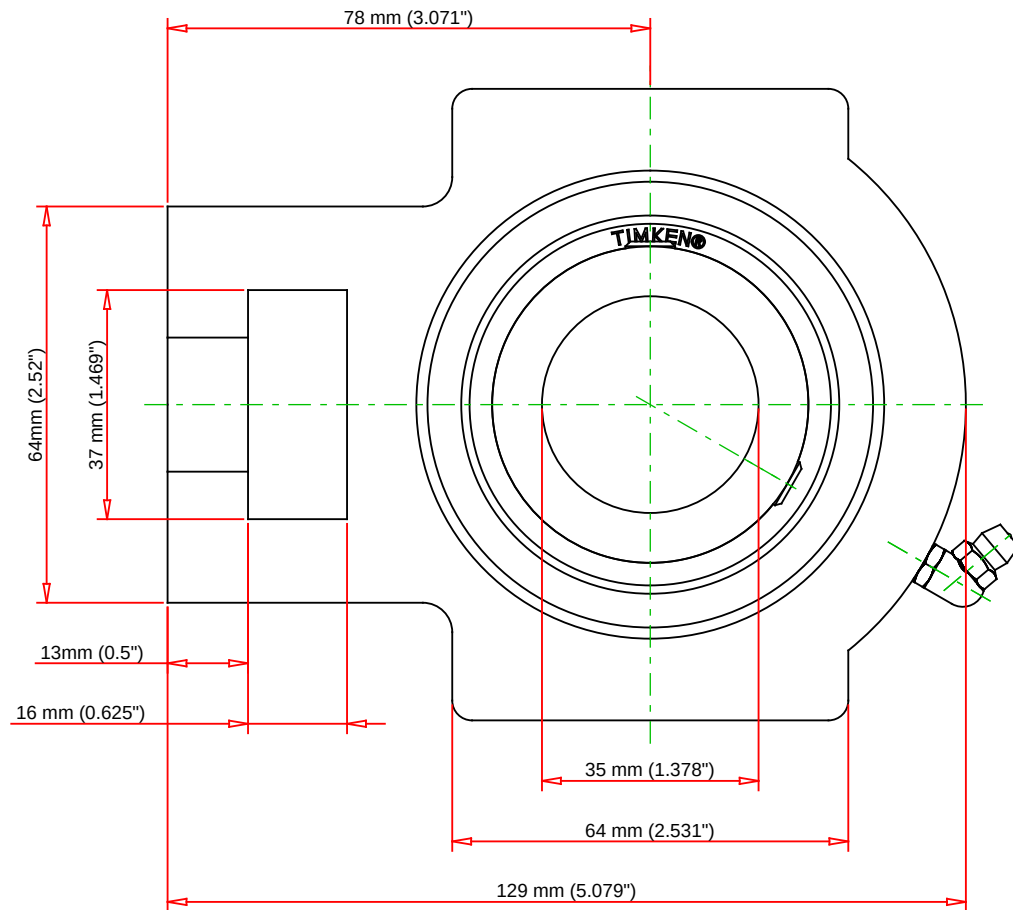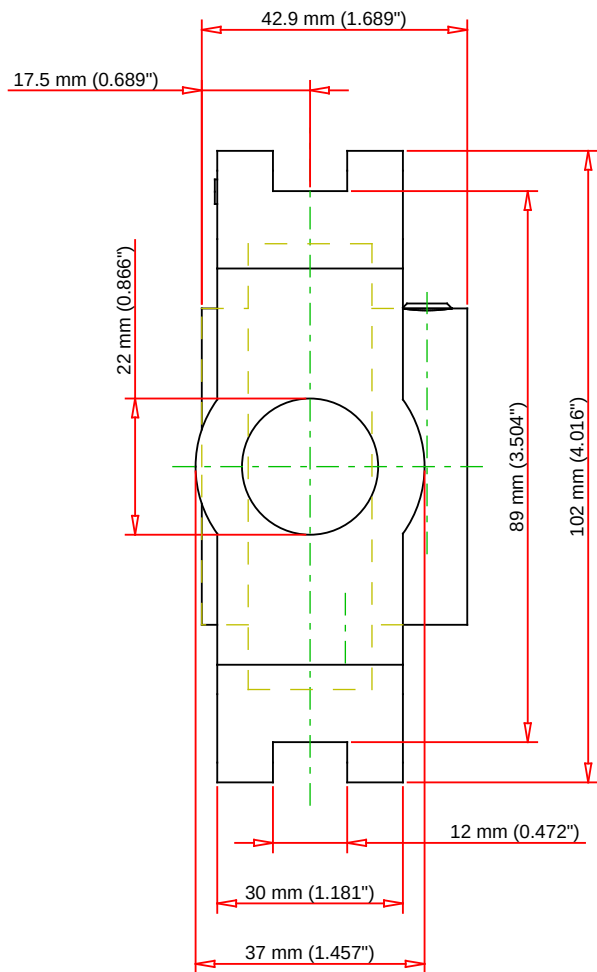

Bearing Number	UC207			
Load Ratings - C _r	5778	lbf	25700	N
Load Ratings - C _{0r}	3462	lbf	15400	N
Weight	3.5	lb	1.6	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UCT207

UCT 200 Take-Up Mounted Bearings - Set
Screw Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY