
HIGH BACK WORK PLATFORM- WP-3636-84B *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

APPROX WEIGHT: 199.60 lbs.

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

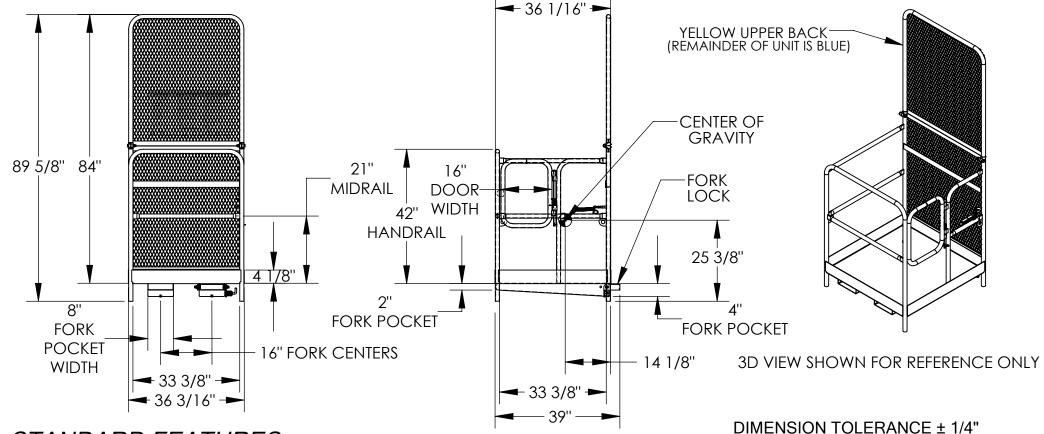

STANDARD FEATURES MODEL NUMBER IS WP-3636-84B

CAPACITY IS 1,000 LBS. (EVENLY DISTRIBUTED LOAD) OVERALL WIDTH IS 36 3/16" USABLE WIDTH IS 33 3/8" **OVERALL LENGTH IS 39" USABLE LENGTH IS 33 3/8"** 42"HIGH HANDRAIL WITH 21" MIDRAIL AND 4 1/8" TOEBOARD SELF-CLOSING DOOR SWINGS IN ONLY (WILL NOT OPEN OUT) FORK LOCK IS ROTATED UP BEHIND BACK OF FORK AND LOCKED WITH SPRING LOADED PLUNGER 36" LONG STRAP WITH HOOK (NOT SHOWN) MUST ATTACH PLATFORM TO FORK TRUCK

84" HIGH EXPANDED MESH BACKING

USABLE FORK POCKET HEIGHTS: 3 7/8" REAR, 1 7/8" FRONT

USABLE FORK POCKET WIDTH: 7 3/4"

MANUFACTURED TO MEET OUR INTERPRETATION OF OSHA STANDARDS TOUGH BAKED IN POWDER COATED ERGO BLUE FINISH FRAME AND YELLOW UPPER BACK

SPECIAL FEATURES

NONE

APPROX. WEIGHT / LOST LOAD = 199.60 MINIMIM EFFECTIVE THICKNESS = >1" **NEVER EXCEED LOAD CENTER** RATING PER FORKTRUCK MANUFACTURERS GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL **EXCEED FORK TRUCK MANUFACTURER'S** LOAD CENTER RATING

P

Ρ

R

0

V

Α

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked Signed: **Printed Name:**

	LEAD TIME WILL START UPON RECEIPT OF SIGNED			APPROVAL DRAWING	
FOR INTERNAL USE ONLY PROJECT SIGN OFF					P.O.# X
SALES		VESTIL MANUFAC			w.o.# X
ENG.		DRAWN BY: C.WOLF	DATE: 08/	31/06	SALES: X
FAB.		reference: X		SCALE: 1:30	
POWER		QUOTED LEAD TIME: χ	QUOTE #	•	14-007-079