



LED Gooseneck Head available in 13W or 26W.

Color: Black Weight: 5.9 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	26W
120V	0.25A	Color Temp	3000K (Warm)
208V	0.16A	Color Accuracy	82 CRI
240V	0.14A	L70 Lifespan	100,000 Hours
277V	0.12A	Lumens	1,461 lm
Input Watts	29.2W	Efficacy	50 lm/W

Technical Specifications

Compliance

UL Listed:
Suitable for wet locations. Suitable for mounting within 4ft (1.2m) of the ground.

IESNA LM-79 & LM-80 Testing:
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Construction

Component Only:
This is a component for ordering LED Goosenecks. Not a complete fixture without Shade and Arm.

Housing:
Precision die-cast aluminum housing, lens frame and mounting plate

Gaskets:
High-temperature Silicone

Cold Weather Starting:
The minimum starting temperature is -40°C (-40°F)

Finish:
Formulated for high durability and long-lasting color

Green Technology:
Mercury and UV free. RoHS-compliant components.

Performance
Lifespan:
100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:
Equivalent 120W Incandescent, 75W Metal Halide or 42W CFL

LED Characteristics
LED:
Single multi-chip, 26W high-output, long-life LED

Color Stability:
LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:
RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.


Installation
Mounting:
Heavy-duty mounting arm with "O" ring seal and stainless steel screw

Electrical
Driver:
Constant Current, Class 2, 100-277V, 50/60 Hz, 0.48 A, THD≤20%, PF 97.9%.

Surge Protection:
4kV

Other
Patents:
The design of the Gooseneck is protected by patents pending in US, Canada, China and Taiwan

Dimensions

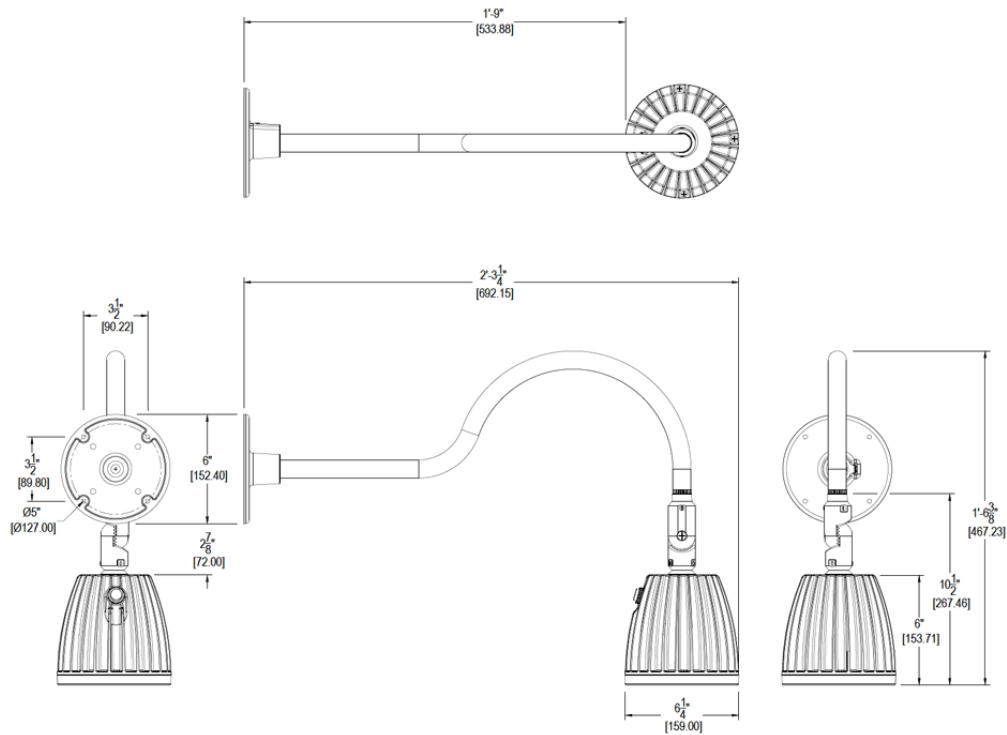

Ordering Matrix

Family	Wattage	Color Temp	Reflector	Finish
GNLED	26	Y		B

26 = 26W
13 = 13W
Y = 3000K Warm
N = 4000K Neutral
Blank = Flood
R = Rectangular
S = Spot
R = Red
I = Ivory
BWN = Brown
BL = Royal Blue
LB = Light Blue
YL = Yellow
G = Hunter Green
S = Silver
A = Bronze
W = White
B = Black