

BALDOR • RELIANCE

Customer information packet

CFSWDM3559-E

3HP, 3470RPM, 3PH, 60HZ, 56C, TEFC, F1

Class - None

Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.

4/7/2025 9:05:52 AM

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR WEEE CE NEMA PREMIUM CSA EEV CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.600 A @ 460.0 V 7.200 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	35WGR930
Layout	35LYE4741
Eff. date	11-27-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	12-13-2019

Heater Indicator	No Heater
High Voltage Full Load Amps	3.6 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	P
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3546M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	16.21 IN
Power Factor	90
Product Family	WD All SS Encapsulated
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3470 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4427ABB01

CAT #	CFSWDM3559-E	WGT	28	KG	
SPEC	35-0000-0507	ENCL	TEFC		
SER #		CC	010A	IP	69
KW	3HP	MAG CUR	2.5/1.25	IE	3
VOLTS	230/460				
AMPS	7.2/3.6	PF	90		
RATING	40C AMB-CONT	IC	411		
RPM	3470	(1/MIN)		MAX (1/MIN)	5400
FRAME	56C	HZ	60	CODE	P
		CLASS	H		
SER.F.	1.15	SF AMP	8.3/4.1	PH	3
		DES	A		
EFF 60HZ	86.5	%(100%)	87.2	%(75%)	86.3
					%(50%)
EFF 50HZ	N/A	%(100%)	N/A	%(75%)	N/A
					%(50%)
DE	6205	ODE	6205		
LUBRICATION	POLYREX EM				
ID LOGO	INVERTER TYPE	VPWM	CHP	60	TO
				90	1.5:1
ID LOGO	WK2	0.127	CT	15	TO
				60	4:1
ID LOGO	SL HZ	2.2	VT	6	TO
				60	10:1
				QR	
YR					

AC Induction Motor Performance Data

Record # 55293

Typical performance - not guaranteed values

Winding: 35WGR930-R011		Type: 3546M	Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	3	Full Load Torque	4.5 LB-FT	
Volts	230/460	Start Configuration	direct on line	
Full Load Amps	7.2/3.6	Breakdown Torque	17.2 LB-FT	
R.P.M.	3470	Pull-up Torque	10.5 LB-FT	
Hz	60 Phase	Locked-rotor Torque	17 LB-FT	
NEMA Design Code	A KVA Code	Starting Current	48.3 A	
Service Factor (S.F.)	1.15	No-load Current	1.25 A	
NEMA Nom. Eff.	86.5 Power Factor	Line-line Res. @ 25°C	3.47 Ω	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	63°C	
S.F. Amps		Temp. Rise @ S.F. Load	74°C	
		Locked-rotor Power Factor	42.3	
		Rotor inertia	0.127 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	59	79	87	90	91	90	91
Efficiency	80.1	86.4	87.3	86.9	85.7	83.9	86.2
Speed	3567	3541	3510	3479	3443	3403	3457
Line amperes	1.53	2.07	2.78	3.55	4.42	5.4	4.07


ABB Motors and Mechanical Inc.

WINDING # 35WGR930


3 HP 3 PH 60 HZ 3470 RPM 460 V 3546M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=17.2 PU=10.5 LR=17 LRA=48.3

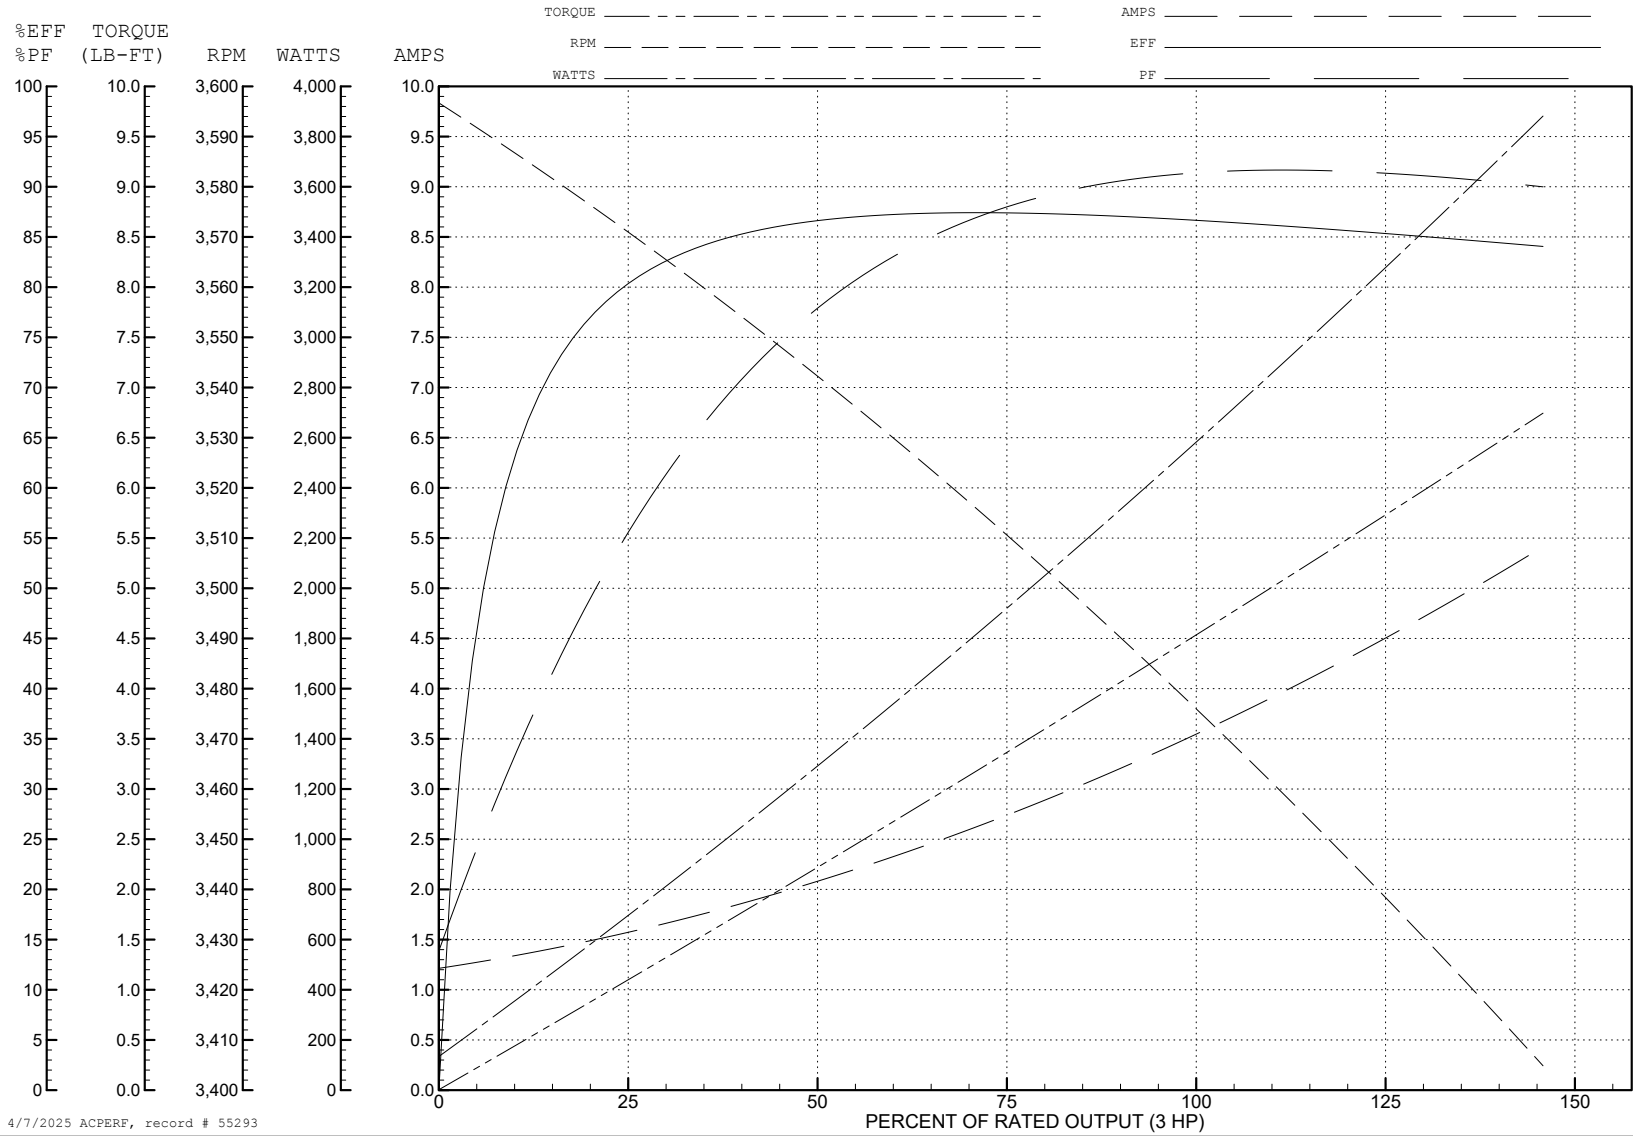

4/7/2025 ACPERF, record # 55293

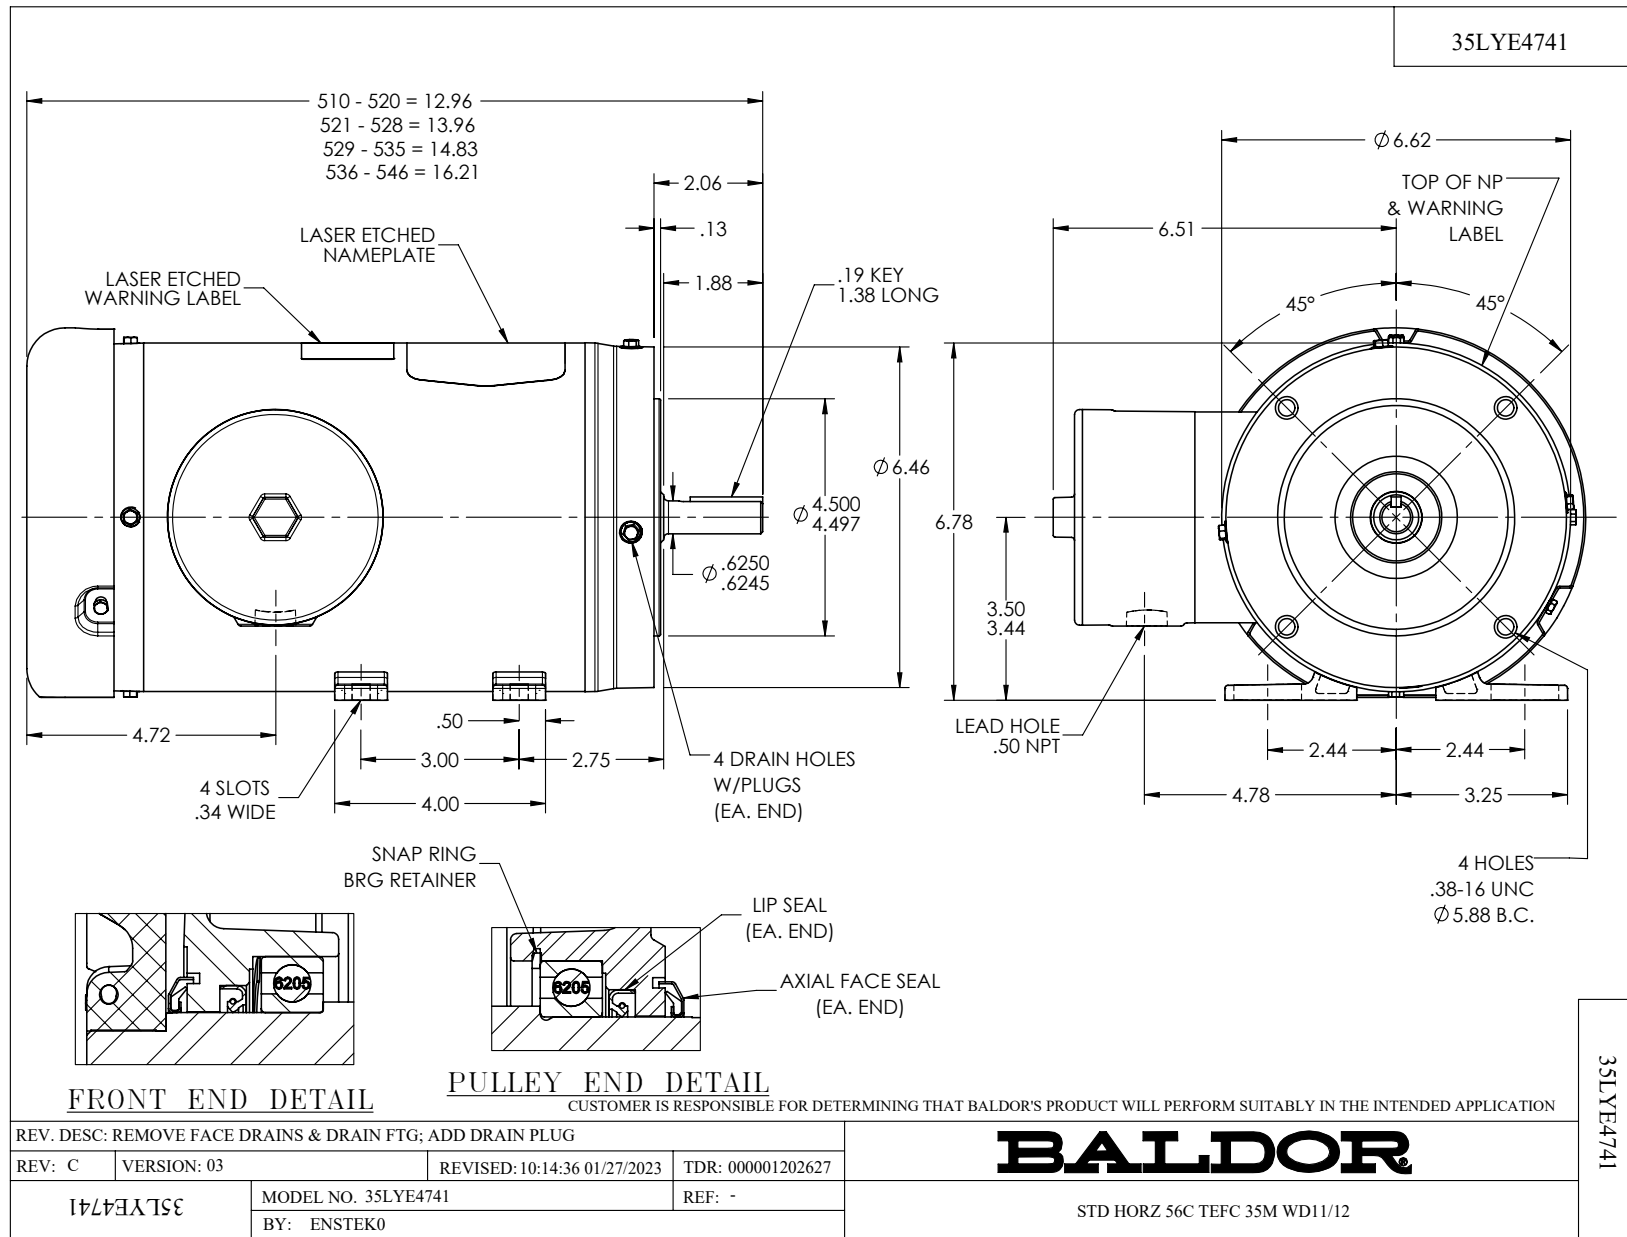

CD0005



LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS