



Customer information packet

CPX251526T

15HP, 3530//2940RPM, 3PH, 60HZ, 254TY, XPFC, F
Class - CLI GP C,D; CLII GP E,F,G
Division - Division I

Specifications

Enclosure	XPFC
Frame	254TY
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP E,F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 50 HZ 15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 460.0 V @ 60 HZ 190.0 V @ 50 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	37.000 A @ 208.0 V 34.400 A @ 230.0 V 29.000 A @ 190.0 V 17.200 A @ 460.0 V 14.500 A @ 380.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WZ864
Layout	09LYM363
Eff. date	05-02-2024
CD Diagram	CD0180
Poles	02
Leads	9#12
Proprietary	False
Created date	04-25-2019

Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	14.5 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP55
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0934M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	25.75 IN
Power Factor	88
Product Family	Chemical Process Features
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2033XPSLEV

NO.		CC	010A				
S/N		TEMP CODE	T3C				
SPEC.	09-0000-1359	INV.TYPE	PWM				
CAT.NO.	CPX251526T	C HP FR	60	C HP TO	90		
HP	15//10	CT HZ FROM	6	CT HZ TO	60		
VOLTS	230/460//190/380	VT HZ FROM	6	VT HZ TO	60		
AMPS	34.4/17.2//29/14.5	MAG CUR	11.8/5.9				
RPM	3530//2940	MX RPM	5400				
HZ	60//50	PH	3	CL	F	NOM.EFF.	91
SER.F.	1.00	DES	A	SL HZ	1.2	WK2	0.87
FRAME	254TY	RATING	40C AMB-CONT				
BLANK	55C AMB @ 1.00 SF, 60C RISE						
	1.15SF ON SINEWAVE		NEMA MG-1 PT.5,IP55				

AC Induction Motor Performance Data

Record # 66211

Typical performance - not guaranteed values

Winding: 09WGZ864-R003		Type: 0934M	Enclosure: XPFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	15	Full Load Torque	22.2 LB-FT	
Volts	230/460	Start Configuration	direct on line	
Full Load Amps	34.4/17.2	Breakdown Torque	102 LB-FT	
R.P.M.	3530	Pull-up Torque	32.9 LB-FT	
Hz	60 Phase	Locked-rotor Torque	40.8 LB-FT	
NEMA Design Code	A KVA Code	Starting Current	128 A	
Service Factor (S.F.)	1	No-load Current	5.9 A	
NEMA Nom. Eff.	91 Power Factor	Line-line Res. @ 25°C	0.591 Ω	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	56°C	
		Locked-rotor Power Factor	29.4	
		Rotor inertia	0.868 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	57	78	86	89	90	90
Efficiency	86.2	90.8	91.7	91.6	91.3	90.5
Speed	3583	3567	3550	3533	3514	3493
Line amperes	7.2	10	13.4	17.2	21.2	25.6


ABB Motors and Mechanical Inc.

WINDING # 09WGZ864

15 HP 3 PH 60 HZ 3530 RPM 460 V 0934M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=102 PU=32.9 LR=40.8 LRA=128

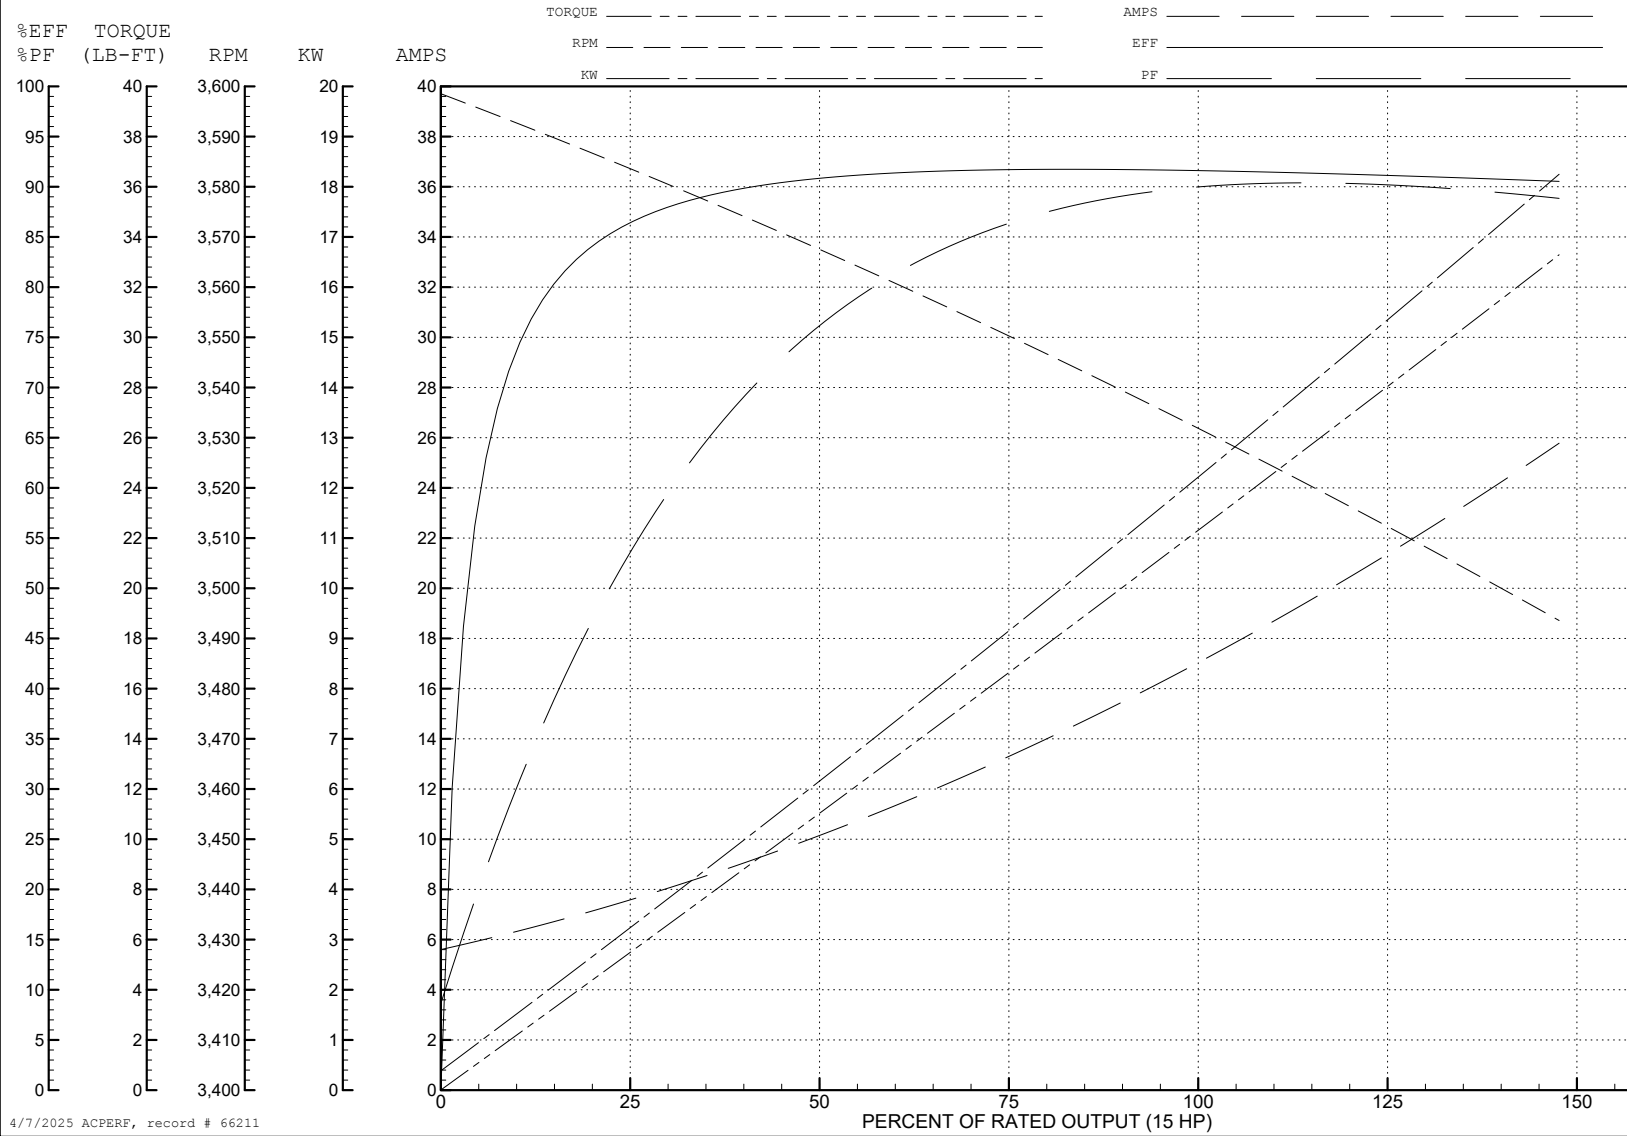

4/7/2025 ACPERF, record # 66211

AC Induction Motor Performance Data

Record # 75707

Typical performance - not guaranteed values

Winding: 09WGZ864-R004		Type: 0934M		Enclosure: XPFC	
Nameplate Data			380 V, 50 Hz: High Voltage Connection		
Rated Output (HP)	15//10		Full Load Torque	17.74 LB-FT	
Volts	230/460//190/380		Start Configuration	direct on line	
Full Load Amps	34.4/17.2//29/14.5		Breakdown Torque	97.77 LB-FT	
R.P.M.	3530//2940		Pull-up Torque	34.86 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque	43.23 LB-FT
NEMA Design Code	A	KVA Code	H	Starting Current	125 A
Service Factor (S.F.)	1		No-load Current	5.79 A	
NEMA Nom. Eff.	91	Power Factor	88	Line-line Res. @ 25°C	0.591 Ω
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	42°C	
S.F. Amps			Temp. Rise @ S.F. Load	51°C	
			Locked-rotor Power Factor	33.3	
			Rotor inertia	0.868 LB-FT ²	

Load Characteristics 380 V, 50 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	51	73	83	87	89	89
Efficiency	84.8	90.1	91.1	91.4	91	90.4
Speed	2986	2973	2959	2946	2931	2914
Line amperes	6.62	8.7	11.27	14.19	17.29	20.69


ABB Motors and Mechanical Inc.

WINDING # 09WGZ864

Typical performance - not guaranteed values.


10 HP 3 PH 50 HZ 2946 RPM 380 V 0934M

TORQUES (LB-FT): PO=97.77 PU=34.86 LR=43.23 LRA=125

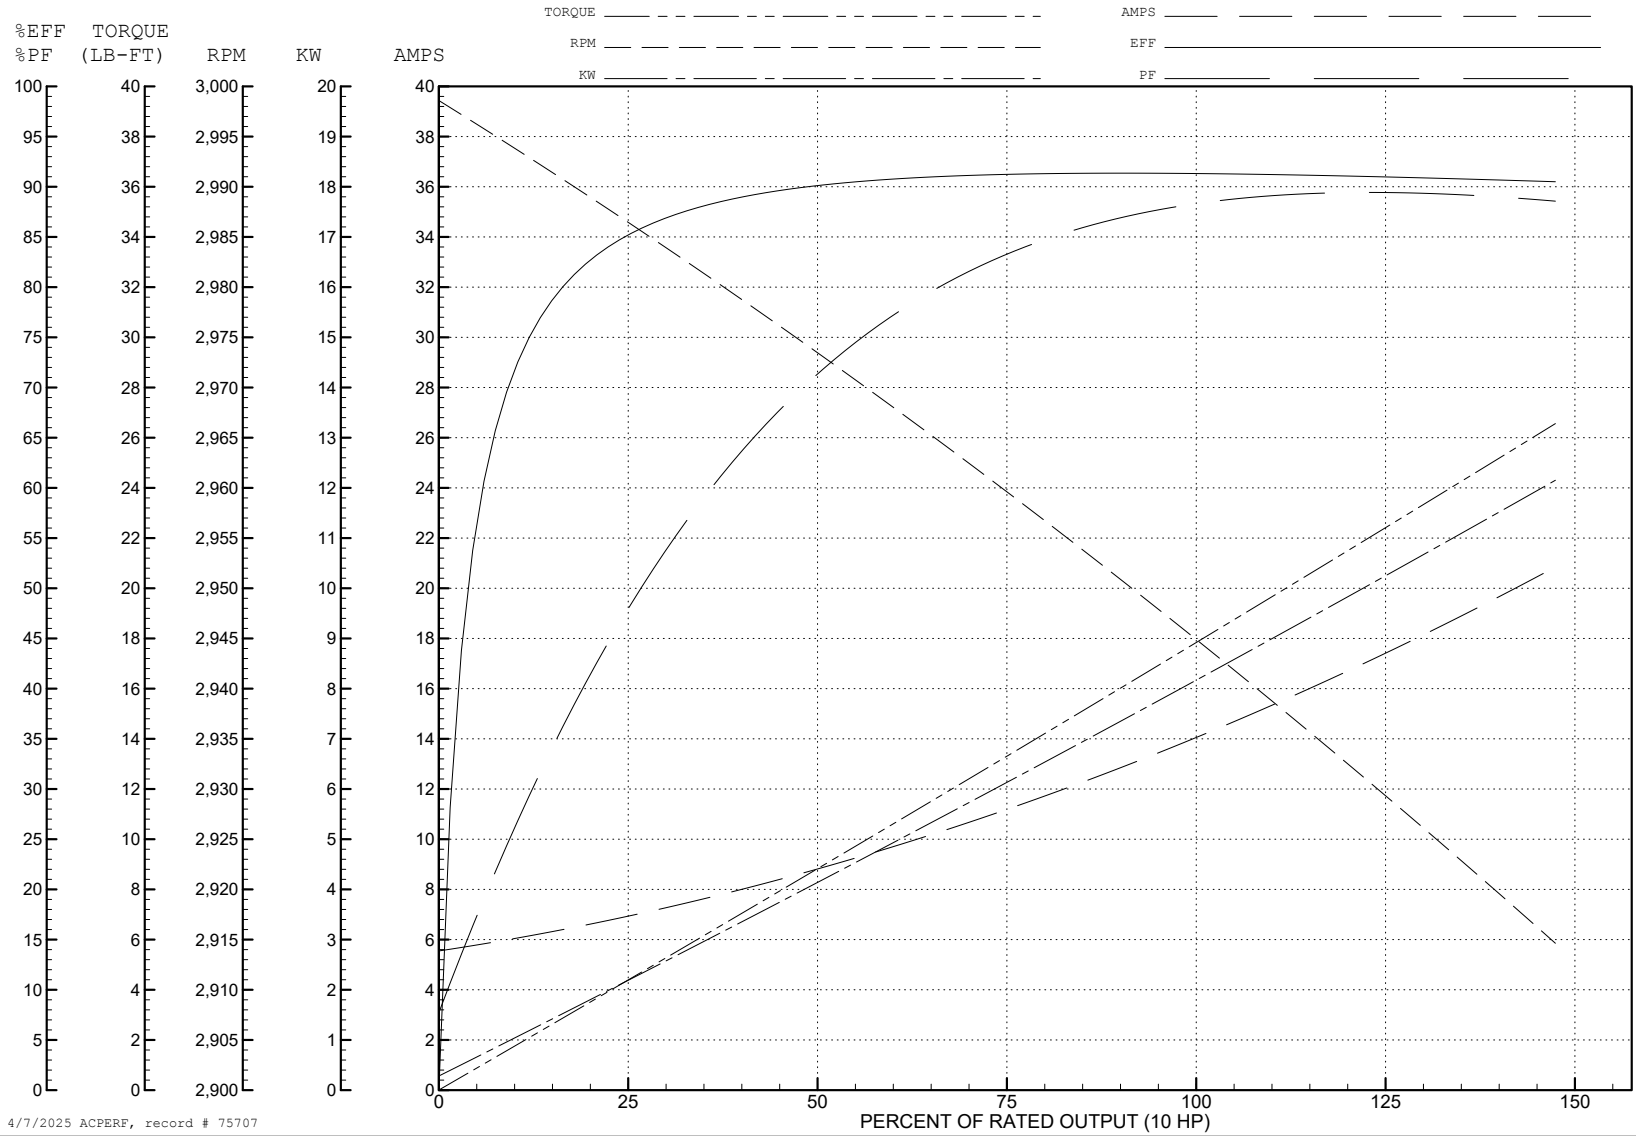


4/7/2025 ACPERF, record # 75707


CD0180

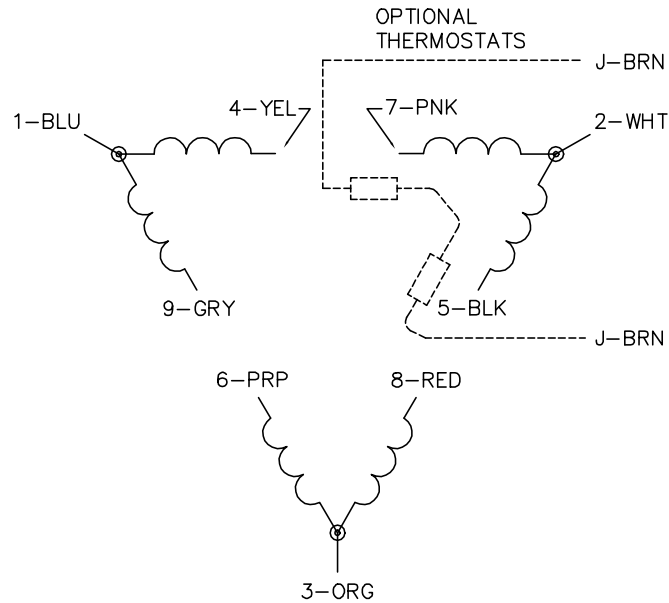

LOW VOLTAGE
(2D)

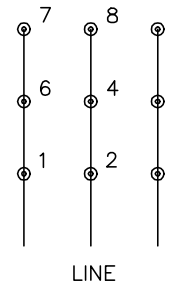

HIGH VOLTAGE
(1D)

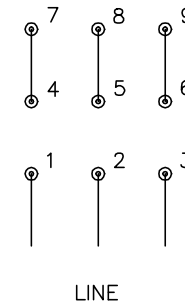

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10: 25: 29 02/19/2019	BY: ENBRIRO
MTL: -	© □	

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1