




- Rolling Elements:** Tapered Roller
Housing: Cast Iron Four Bolt Pillow Block
Self Alignment: +/- 3 Degrees
Lock: Setscrew, Double Collar
Seal: Felt
Optional Seal: Single Lip Contact
Temperature: -20°F to 220°F



Mtd. Tapered Bearings

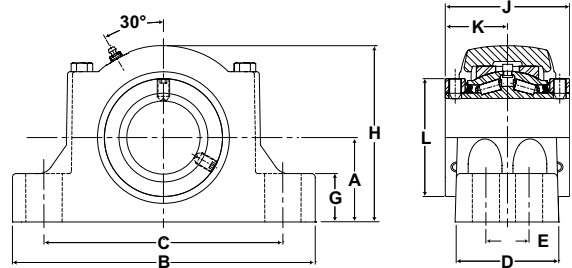

ERP Expansion Series Four-Bolt Base Pillow Blocks

Bore Diameter		Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm													Unit Wt. lb/kg
					A	B	C		D	E	G	H	J	K	L	Bolt Size	Total Expansion	
inch	mm	Min.	Max.															
3 15/16 4	100	ERP-315-4	ERCI-315	20980 93324	4 1/4 108.0	15 1/4 387.4	11 279.4	13 330.2	5 5/32 131.0	2 1/4 57.2	2 7/16 61.9	8 7/8 225.4	6 1/4 158.8	3 1/8 79.4	5 15/16 150.8	3/4	3/8 9.5	90.0 40.82
		ERP-100MM-4	ERCI-100MM															
		ERP-400-4	ERCI-400															
		ERP-105MM-4	ERCI-105MM															
4 7/16 4 1/2	110	ERP-110MM-4	ERCI-110MM	25750 114542	4 3/4 120.7	16 1/2 419.1	11 3/4 298.5	13 7/8 352.4	5 3/8 136.5	2 1/2 63.5	2 3/4 69.9	9 7/8 250.8	6 3/4 171.5	3 3/8 85.7	6 13/32 162.7	3/4	3/8 9.5	110.6 50.2
		ERP-407-4	ERCI-407															
		ERP-408-4	ERCI-408															
		ERP-115MM-4	ERCI-115MM															
4 15/16 5	120	ERP-120MM-4	ERCI-120MM	35520 158001	5 1/2 139.7	18 1/2 469.9	13 1/2 342.9	15 7/8 403.2	6 5/64 154.4	2 3/4 69.9	3 1/8 79.4	11 5/16 287.3	7 1/4 184.2	3 5/8 92.1	7 13/32 188.1	7/8	3/8 9.5	161.0 73.03
		ERP-125MM-4	ERCI-125MM															
		ERP-415-4	ERCI-415															
		ERP-500-4	ERCI-500															