

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports
Curves & tracks	Side guide solutions	Miscellaneous products	Related information

# 11290a

## 882 BEVEL - 882 TAB

www.SystemPlastSmartGuide.com

Sideflexing chains





Click here for related information.



**882 BEVEL**





# 50150a

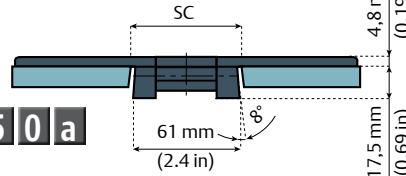

**882 TAB**




# 50140a

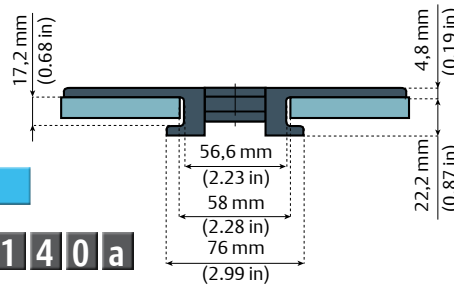


- NGEvo**
- Longest life
  - Lowest friction
  - Good chemical resistance
  - High abrasion resistance
  - Approved for direct food contact
  - Less dust than with acetal chains
  - More.....

Other versions 882 TAB:



**Nolu®-S curves**  
are strongly recommended with these chains!

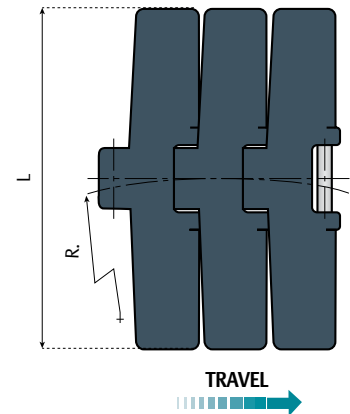

**Characteristics:**  
The 882 BEVEL and TAB types have a larger hinge geometry and because of a well balanced distribution of the material they have an excellent carrying load capacity.  
**Advantages:** Heavy duty.

**Pin material:** Austenitic steel.

# 11300a

Item description	Material plate	Breaking load		Width L		R min.		SC				Weight	
								Straight		Curving		Kg/m	lbs/ft.
		N	lbs	mm	in	mm	in	mm	in				
NGE882-K450	NGE Grey Blue	9000	2020	114,3	4 ½	610	24	62	2.44	58	2.28	1,9	1.3
NGE882-K750				190,5	7 ½							2,4	1.6
NGE882-K1000				254,0	10							2,8	1.9

Item description	Material plate	Breaking load		Width L		R min.		SC				Weight	
								Straight		Curving		Kg/m	lbs/ft.
		N	lbs	mm	in	mm	in	mm	in				
NGE882TAB-K450	NGE Grey Blue	9000	2020	114,3	4 ½	610	24	62	2.44	58	2.28	2,0	1.4
NGE882TAB-K750				190,5	7 ½							2,5	1.7
NGE882TAB-K1000				254,0	10							2,9	1.9
NGE882TAB-K1200				304,8	12							3,4	2.3
LF882TAB-K450	LF Brown	10000	2250	114,3	4 ½	610	24	62	2.44	58	2.28	2,0	1.4
LF882TAB-K750				190,5	7 ½							2,5	1.7
LF882TAB-K1000				254,0	10							2,9	1.9
LF882TAB-K1200				304,8	12							3,4	2.3

Standard length: 80 pitches (3,05 m - 10 ft.)

Breaking load according to standard ISO 4348 - DIN 8153